


<u>Subject:</u>	Solitude Pin Box Filler Plate					Number	22-001
						Date	4/5/2022
						Model (s)	Solitude ST293RL & ST378MS
						Build Date	12/14/21 - 12/16/21
<u>Circulate To:</u>	Service Manager	x	Parts Manager	x	Technician	x	
	Warranty Admin	x	Sales Manager		Part Number (s)	110460	
<u>Concern:</u>	Newly designed Lippert upper deck leaves space between pin box and bulkhead. This creates the potential for water intrusion from road spray.						
<u>Remedy:</u>	The remedy is to install a filler plate (part number #110460).						
<u>Flat Rate:</u>	920002 - Labor time allowed 0.5 - Photo of void required.						

Filler Plate - part number #110460

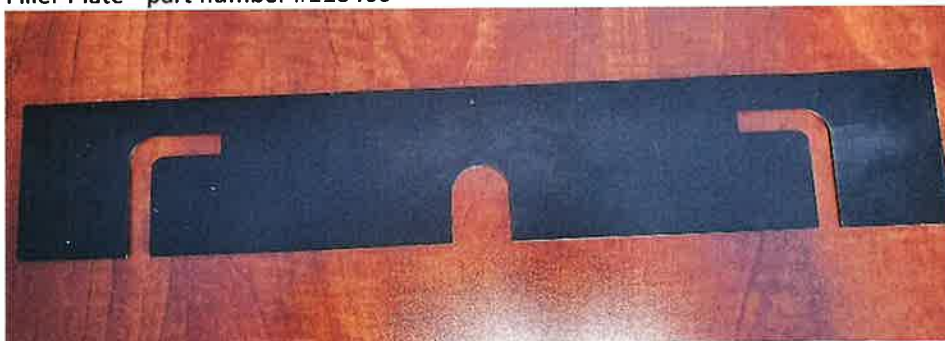

Please follow instructions as outlined below. If you have any questions, please contact our Dealer Relations team at 888-825-2820 or email: warranty@granddesignrv.com.

Step 1. Remove the 3/8" hex head screw and P-clamp that retain the breakaway wiring.



Step 2. Remove the square head screw holding the vinyl screw cover. Pull back the screw cover and remove two to three screws from each side of the pin box that secure the cap.



Step 3. Insert the cover plate on the side plates of the pin box and lift the front edge up, and inside the front cap. Pull down slightly on the cap to slide the plate into position.



Step 4. Secure the plate in place with a self-tapping screw on each side. Reinstall the screws in the lower cap rail and vinyl screw cover. Seal any gaps around the plate with black sealant.

Step 5. Reinstall the 3/8" hex head screw and P-clamp that retain the breakaway wiring.

View of the plat placement without cap. Note fit to pin box side plates and angle.

