Volvo Chassis - VN Model - Trailer Brake Handle Installation

It is possible to have Volvo trailer brake handle failures due to incorrect installation.

Trailer Brake Handle Installation

The handle and back cover will need to be pre-assembled before installation, the back cover will be slightly raised



Slide the handle assembly over the valve until a “click” is heard or felt, the back cover should be flush with handle



Pull back on handle to confirm properly installation



For Trailer Brake Control Valve replacement instructions refer to **5711-03-02-01 Trailer Brake Control Valve, Replacement** found in Impact.

Tags volvo trailer brake handle

Live UI

Related links and attachments

KC-2245 5711-03-02-01 Trailer Brake Control Valve

Feedback

Give feedback


to help improve the content of this article

Live UI

57103-2 Trailer Brake Control Valve, Replacement

You must read and understand the precautions and guidelines in Service Information, group 5, "General Safety Practices" before performing this procedure. If you are not properly trained and certified in this procedure, ask your supervisor for training before you perform it.

1

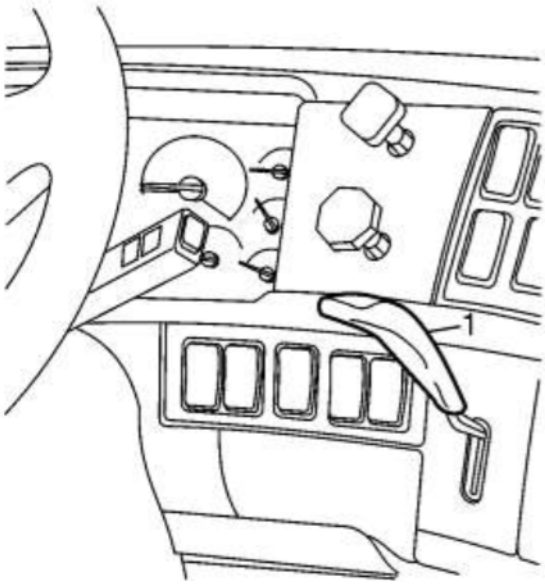

. Hand Control Valve

Park the vehicle on a level surface and chock the wheels. Make sure the vehicle is in neutral and the brakes have been released. Drain air pressure.

2
Remove dash trim piece below the radio and ECC.

3
Release and remove the dash trim piece above the radio and ECC.


4
Unsnap the switch panel from the dash, located just left of the trailer hand control valve.

5
Remove the four screws, securing the hand control valve and mount bracket.


6
Disconnect the airlines supplying the hand control valve.

7

Copyright to this documentation belongs to the Volvo Group. No reproduction, copying, change, amendment or other similar disposal is entitled without prior written consent by the Volvo Group
The information contained herein is current at the time of its original distribution, but is subject to change. The reader is advised that printed copies are uncontrolled.

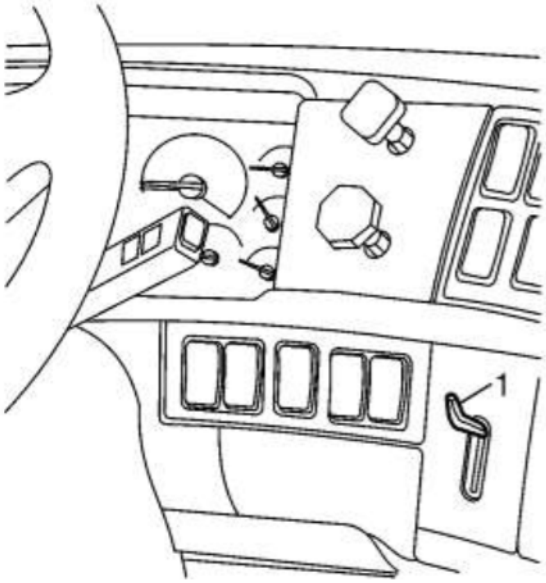

. Trailer Hand Control Valve, Handle Removed

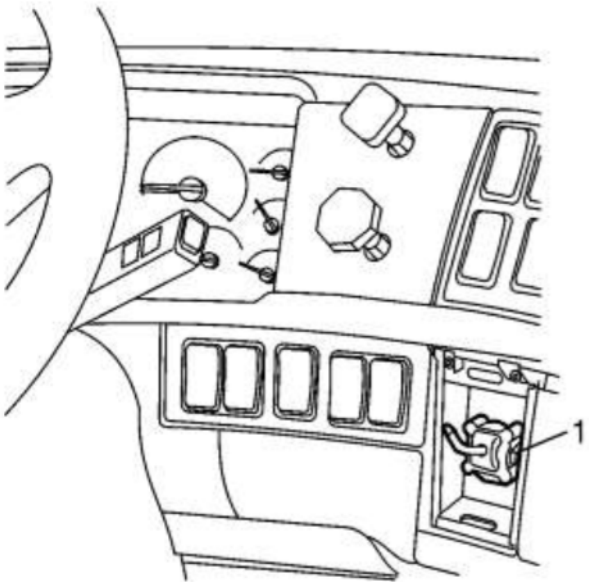

. Trailer Hand Control Valve, Cover Removed

Remove the hand control valve handle cover, handle and cover plate.

8
Secure the airlines to the replacement valve.

9
Secure the replacement hand control valve and mounting bracket to the dash.

10
Install cover plate and secure handle.

Copyright to this documentation belongs to the Volvo Group. No reproduction, copying, change, amendment or other similar disposal is entitled without prior written consent by the Volvo Group
The information contained herein is current at the time of its original distribution, but is subject to change. The reader is advised that printed copies are uncontrolled.

11
Secure the switch panel and dash trim pieces.

12
Start vehicle, build air pressure and check for any leaks and proper orientation.

Copyright to this documentation belongs to the Volvo Group. No reproduction, copying, change, amendment or other similar disposal is entitled without prior written consent by the Volvo Group
The information contained herein is current at the time of its original distribution, but is subject to change. The reader is advised that printed copies are uncontrolled.