


3.0L Cam Carrier Inspection
Update Prior to Sale Campaigns
N763 and H426

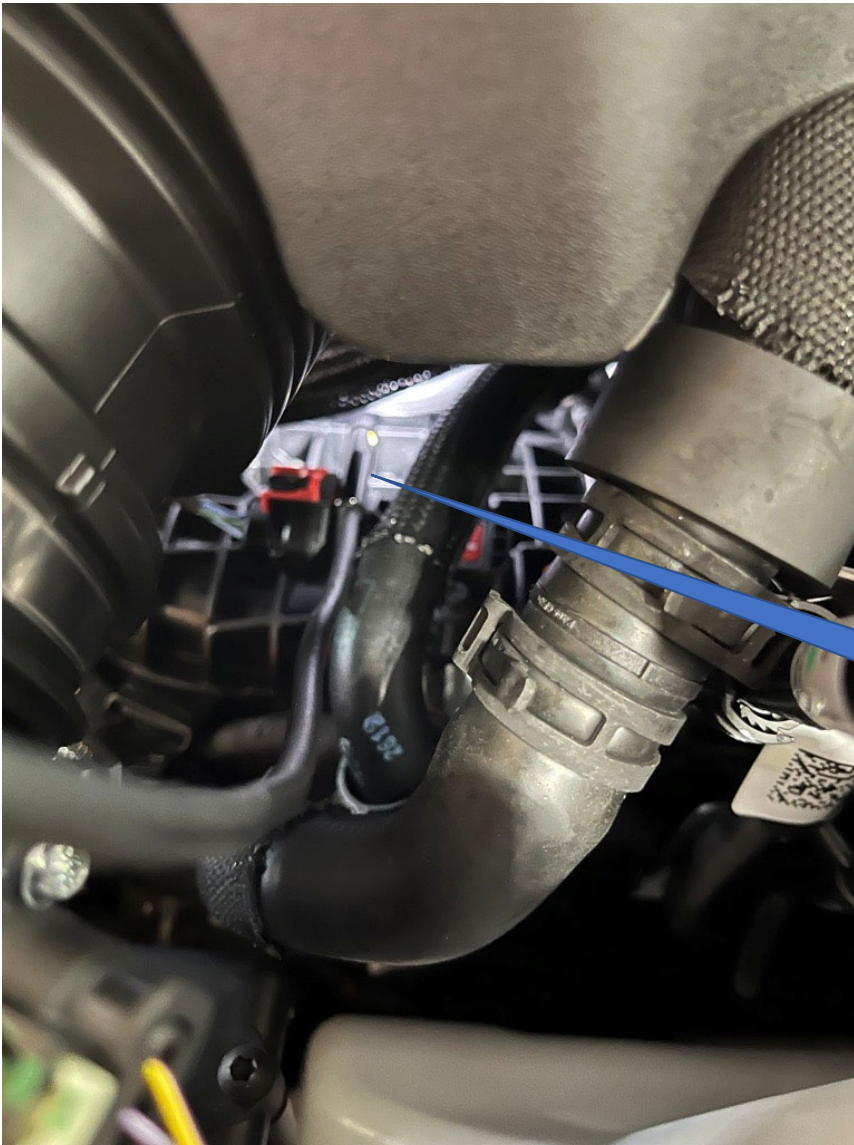

Using a suitable borescope, slide the end of the scope below the air intake on the left hand side, above the intake air sensor connector, just in front of the coolant hose.

The engine cover does not need to be removed to complete the inspection.

The drill marks to be inspected are on the side of the cylinder head, straight in from where the end of the borescope is in the picture.

Camera End of
Borescope



The markings to inspect are just below the QR code.

The video on the left and on the following slide shows the borescope being inserted to inspect the markings.

