



Start-Up Procedure

Bulletin Type:	INC	Publication Date:	February 2023
Bulletin No:	23-086	Make(s):	Entegra Coach
Model Year (s):	2023-2024	Model(s):	Aspire, Anthem, Cornerstone


Incident:	Understanding the start-up procedure
Affected Units:	2023-2024 Entegra Coach Aspire, Anthem, Cornerstone

Start-up Procedure Instructions

At the time of pick up, the delivery driver should use the following start-up procedure:

1. Turning on the disconnect switches:

- Use the round Trimark key to unlock the baggage doors to access the disconnect switches.
- Turn on the (2) Chassis Battery Disconnect Switches in the rear battery compartment.
- Turn on the (4) House Battery Disconnect Switches in the passenger mid storage compartment.
- Turn on the Main Disconnect Switch inside the unit mounted on passenger lower panel.

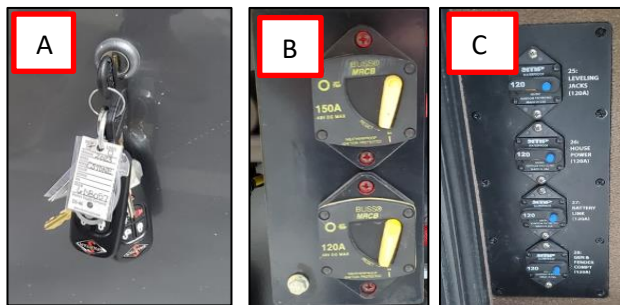

2. Starting the unit:

- Keys must be within proximity of the driver's seat.
- Apply foot to brake
- Push the start button one time (green light should be solid)
- The vehicle's grid heater must heat up before the vehicle starts. Wait for the Malfunction Indicator Lamp (upper right corner) and the Wait to Start Indicator Lamp (upper left corner) lamp to go out before starting.
- Push and hold the start button a second time to start the vehicle.




3. Adjust Pedals and Steering Column

- A. **Aspire:** Use the foot pedal located on the left side of the steering column. To adjust the tilt and telescope of the column, push the pedal down, move to the desired location, then release the pedal.
- B. **Anthem/Cornerstone:** Through the Center Console Interface (CCI), use the Controls screen to control the positioning of the items listed below:



- i. Steering wheel tilt: Press Tilt to set the vertical position of the steering wheel. (Figure 1)
- ii. Steering wheel telescope (distance from driver's seat): With the vehicle in PARK, press Tele to set the horizontal distance of the steering wheel from the dash. (Figure 2)
- iii. Floor pedals: Press Pedals control to adjust the distance of the gas and brake pedals from the firewall or driver's seat. (Figure 3)

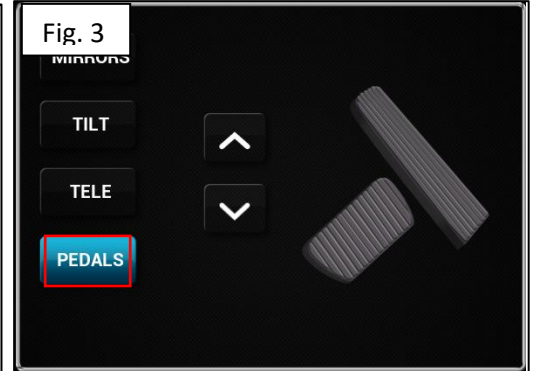

4. Raising Jacks (jacks down on CCI)

- A. Through the Center Console Interface (CCI), use the Leveling screen to control the jacks controls.
- B. Select "All Retract".

5. Parked Vehicle

- A. Any time a vehicle is parked for any length of storage time, all the disconnect switches from step #1 should be turned off.

After delivery, the Dealer should use the following start-up procedure:

1. Turning on the disconnect switches:


- A. Use the round Trimark key to unlock the baggage doors to access the disconnect switches.
- B. Turn ON the (2) Chassis Battery Disconnect Switches in the rear battery compartment.
- C. Turn ON the (4) House Battery Disconnect Switches in the passenger mid storage compartment.
- D. Turn the Rotary Disconnect to the ON position
- E. Initiate the inverter by pressing the Inverter Toggle Switch (Red Box on D)
- F. Turn on the Main Disconnect Switch inside the unit mounted on passenger lower panel.



2. Power Shore Connection:


A. Aspire:

- Firefly Vegatouch Home Screen, press the Electrical icon. (Red Box in A)
- At the Electrical Screen
 - Tap the Inverter icon to enable the inverter. (Red Box in B)
 - Tap the Charger Icon to enable the charger. (Red Box in C)
- Plug in the Power Shore Cord
- The Inverter icon should change to pass through and Charger icon should change to Bulk at the main screen on the Firefly Vegatouch Screen.

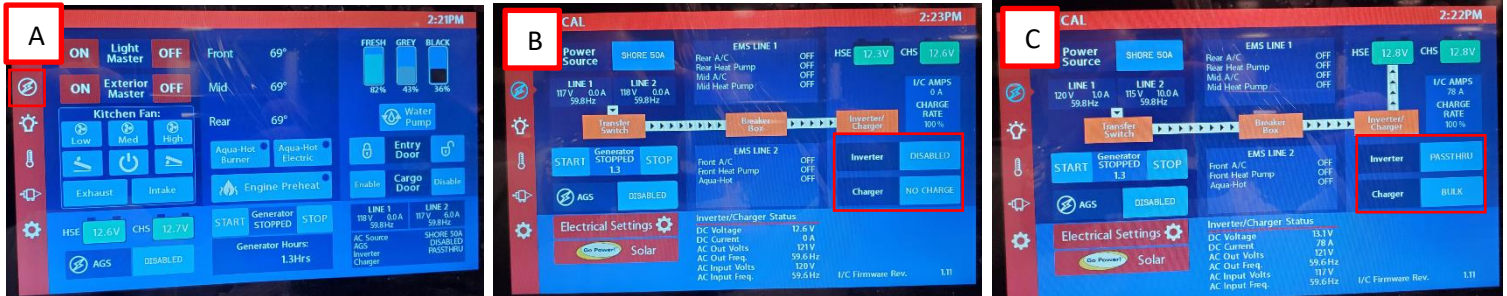

B. Anthem/Cornerstone:

- Firefly Vegatouch Home Screen, press and hold the Inverter icon
- At the Go Power Inverter Screen (Red box on A)
 - Tap the "INV 1" icon. The icon should change from Orange to Green. (Green Box on B)
 - Tap the "CHG 1" Icon. Below the icon should show enabled but the stay Orange. (Orange Box on B)
- Plug in the Power Shore Cord
- Go back to the Firefly Vegatouch Screen. The "CHG 1" icon should now be green.
 - NOTE:** If the operation sequence is not followed, the inverter AC Out will not have voltage. Verify the system connected correctly by reviewing.

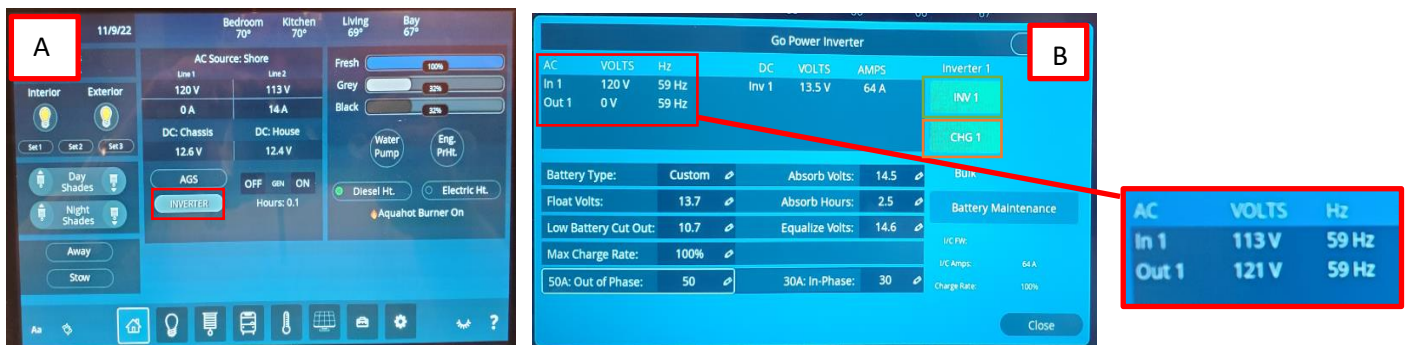

Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law. Jan. 2019.

03 South Main Street • P.O. Box 460 • Middlebury, IN 46540