



Fuel Fill Hose and Vent Hose Routing

Bulletin Type:	TSB	Publication Date:	March 2023
Bulletin #(s):	23-091	Make(s):	Jayco & Entegra Coach
Job Code(s):	9803583	Model(s):	Accolade XT (35L, 32U) Seneca XT (35L, 32U)
Flat Rate(s):	1.0 hr. labor Fuel Fill Hose/Vent Hose Inspection and Repair	Model Year(s):	2023

Incident:	Fueling the vehicle is difficult caused by improper fuel fill hose and vent hose routing.
Affected Units:	2023 Entegra Coach Accolade XT and 2023 Jayco Seneca XT
Parts Kit Details:	Parts Kit: 23-091JM 2 - CLAMP,VNL COAT STL LOOP 2.50
Misc. Tools & Supplies:	Jack Stand Screw Gun with Square Bit 7/16 Hex Head Nut Driver Socket
Parts Return Information:	N/A

Fuel Hose and Vent Hose Inspection and Repair

1. Lower both rear jacks of the unit to raise the back tires just barely off the ground. (Figure 1)
2. Insert jack stand underneath frame rail.
3. Using a 21mm socket remove the outside tire from rear driver side. (Figure 2)





Fig. 1



Fig. 2

4. Remove both metal fuel fill shields located inside the wheel well and save the fasteners for re-installation. (Figure 3)
5. The incorrect installation is shown in figure 4 and the correct installation is shown in figure 5.

- A. The fuel fill should be installed with the vent tube on top of the fuel fill in the fuel fill bucket.
- B. The vent hose routing should be on top of the fuel fill hose.
- C. The fuel fill hose should be secured with a 2.5" P-Clamp as high as possible or tight against the crossmember.

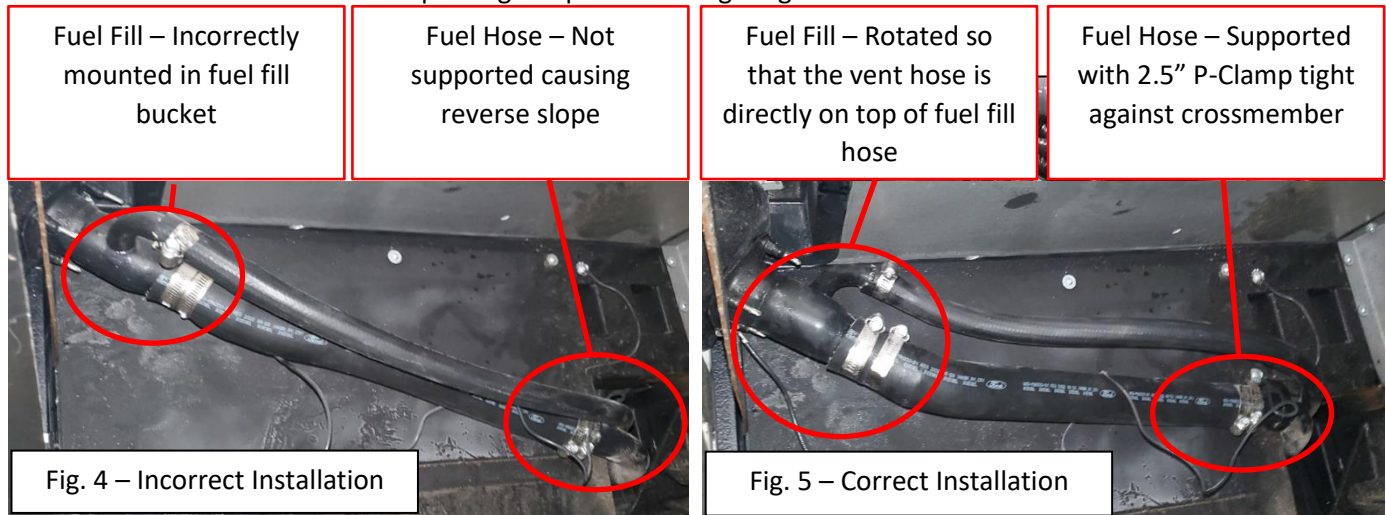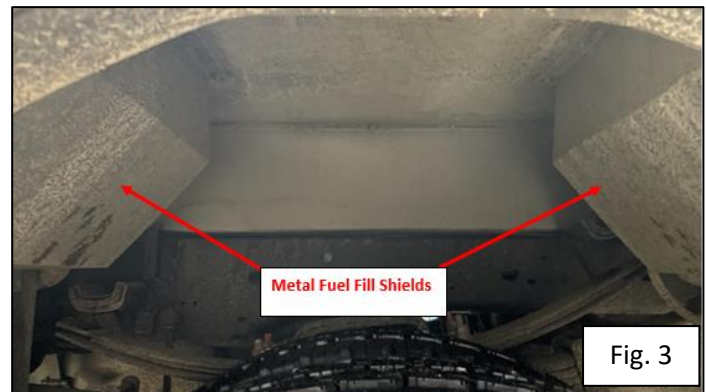

- D. Viewing from under the unit, verify the 90 degree fuel hose between the trunk box and the fuel tank is not kinked. The hose will need to be removed and shortened if kinked. (Figure 6)

6. Install both Fuel Fill cover shields.
7. Install outside rear driver side tire and torque the lug nuts to 150 LBF-FT.
8. Remove Jack stands and raise rear jacks back up to lower the unit back down.



Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540