

Non-Standard Torque Requirements

Email not displaying correctly?
[View it in your browser.](#)



BULLETIN No. 23-006:

Dear Valued Distributor:

Impacted Product Line: All Carriers


Installation: Wheel lift

The retaining hardware in the upper and lower adjustable link pivot pin on every carrier wheel lift in your inventory needs to be re-torqued to **10 FT LBS.**

For new carrier wheel lift installations, the upper and lower adjustable link pivot pins should now be torqued to **10 FT LBS.**

This torque requirement is an update to the standard torque applied to this size hardware. All team members working on new installations need to be made aware of this updated requirement and ensure that it is followed.

See pictures below to reference the correct location of the upper and lower link pivot pins.

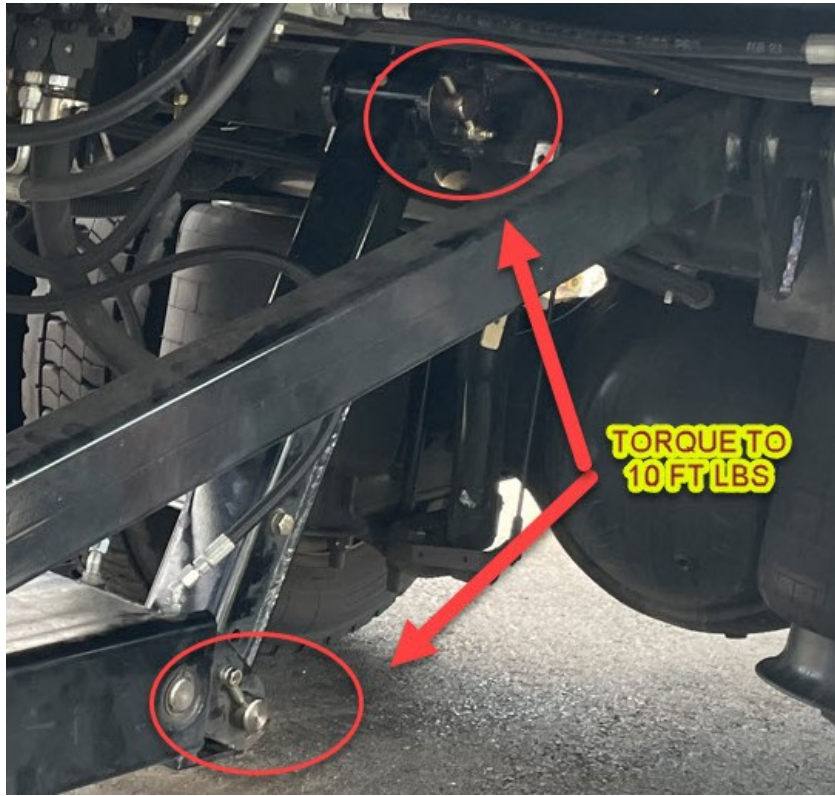



If you have any questions or concerns, please do not hesitate to contact your District Sales Manager.

Copyright © 2023, All rights reserved.

Our mailing address is:

Jerr-Dan
13224 Fountainhead Plaza
Hagerstown, MD. 21742

[unsubscribe from all emails](#)