

Volvo CLC Fairing Handles

Service Category Service

Section Function Group 891

Technician Skill Level A

Market North America

Applicability

VOLVO

Years	Models
2024	VN

Introduction

Volvo Trucks has determined that certain model year 2024 VN vehicles were built and shipped with temporary "T" style fairing handles due to supplier tooling damage. Please follow the instructions below to replace temporary T-handle with proper latch handle.

Production Change Information

This bulletin applies to vehicles built within the specified production changes below.

Brand	Engine	Emission Level	Starting Build Date	Ending Build Date
Volvo	D13	EM-US21	26-June-2023	17-July-2023

Warranty Information

This repair is covered by an authorized Service Program. Reimbursement is obtained through the normal claim handling process.		
Claim Type (used only when uploading from the Dealer Bus. Sys.)		B
Main Labor Code	Description	Hours
8919-03-02-06	Latch, Chassis side fairing, Replacement (0.2x4)	0.8
Causal Part	82757796/82757798	
SCC Authorization Code	S3553	
Expiration Date	July 31, 2024	

Volvo CLC Fairing Handles

Parts Information

Part Numbers	Part Names	Quantity
82757796	Handle Chassis Fairing	2
82757798	Handle Chassis Fairing	2
20727160	Extension, Chassis Fairing Handle LH	2
20727161	Extension, Chassis Fairing Handle RH	2
84717051	Set Screw	4
82757805	Cover	2
82757807	Cover	2

Required Tools & Equipment


- N/A

Calibration Information

- N/A


Repair Procedure

1. Park the vehicle on a level surface.
2. Apply the parking brake.
3. Place the gear lever in park or neutral.
4. Install the wheel chocks.

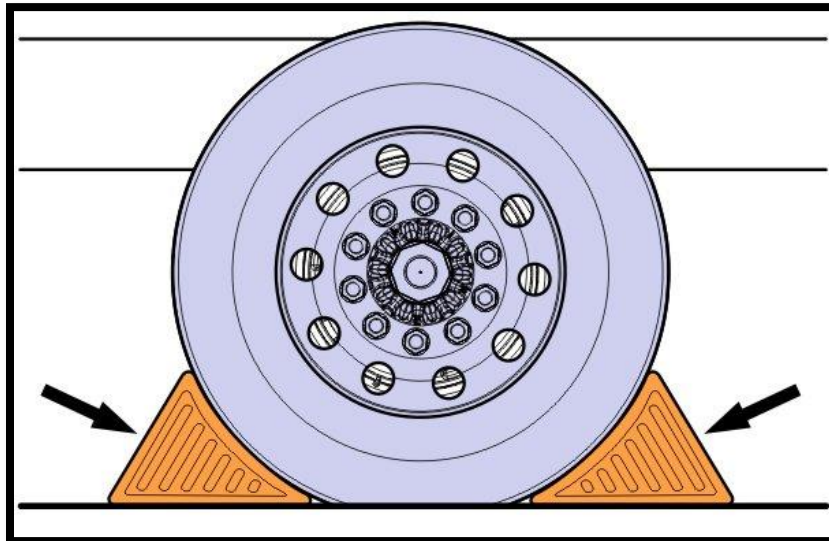


Volvo CLC Fairing Handles

5. Disconnect the cable from the negative terminal.

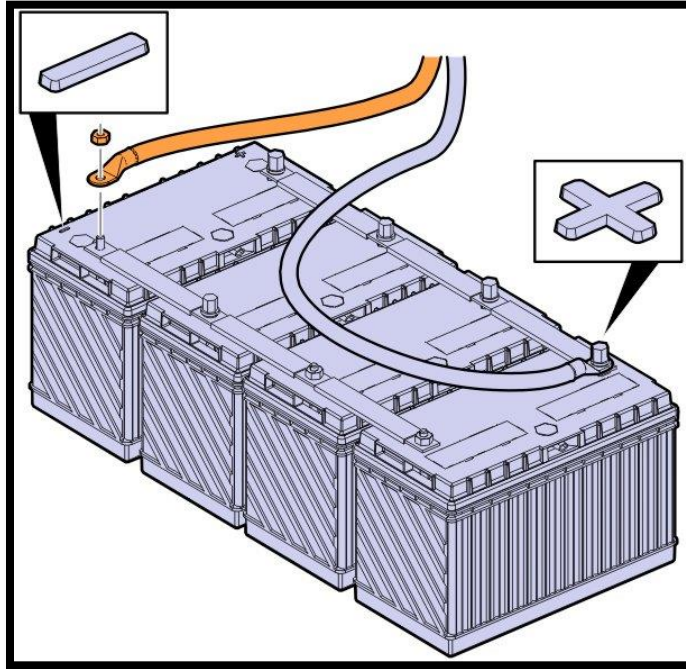


6. Open the chassis side fairing by pulling up on the handles.
7. Remove both bolts from the latch pin.

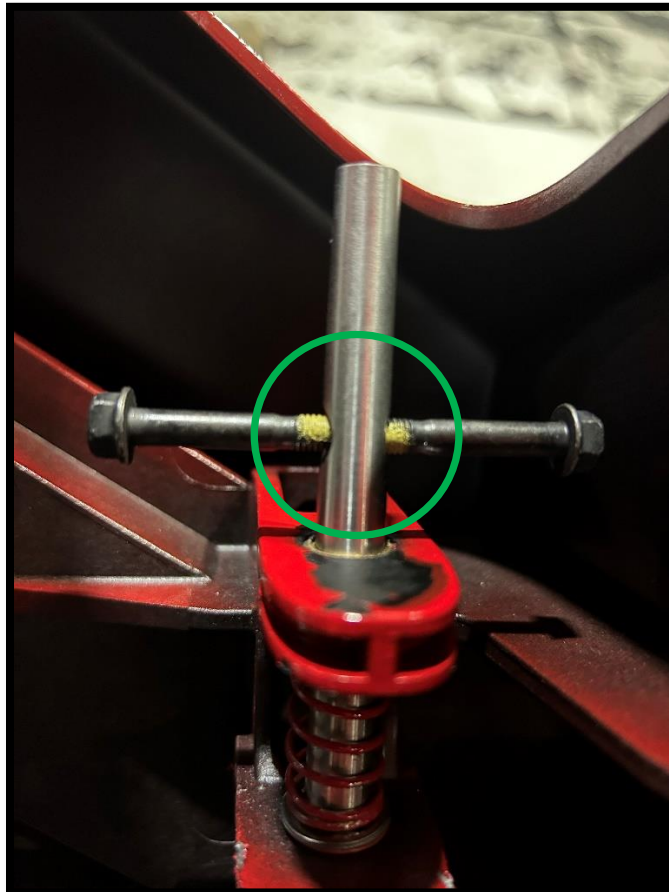


Volvo CLC Fairing Handles

8. Install the latch handle (1) and handle extension (2) to latch pin.

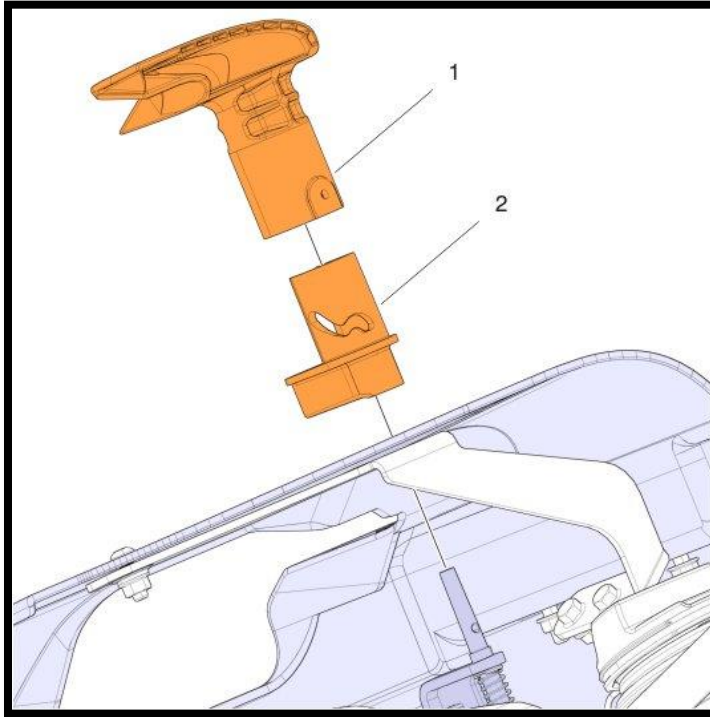


9. Attach the replacement latch and handle extension to the latch pin with the fastener.

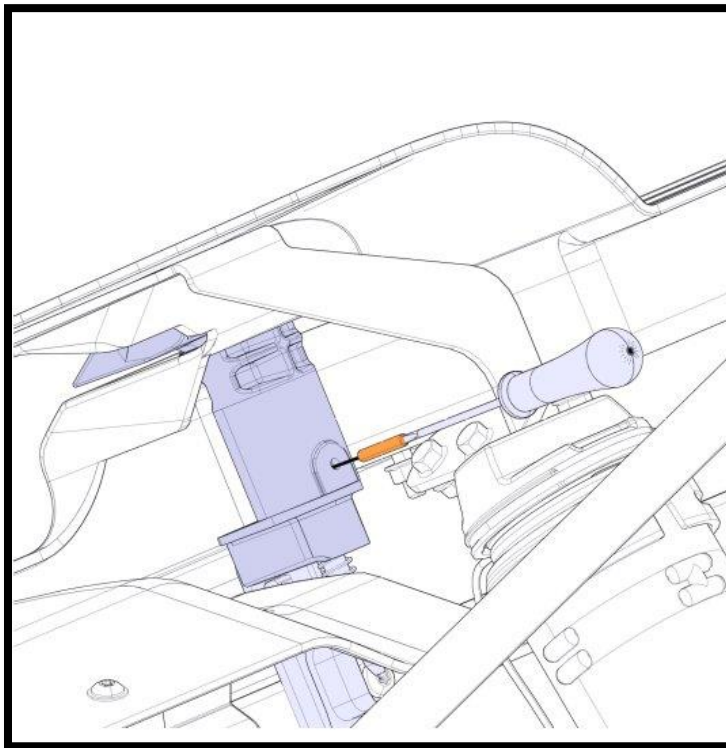


10. Complete steps 7-9 for remaining latch handle replacement.

Volvo CLC Fairing Handles

11. Close the side fairing.
12. Connect the cable to the negative terminal.

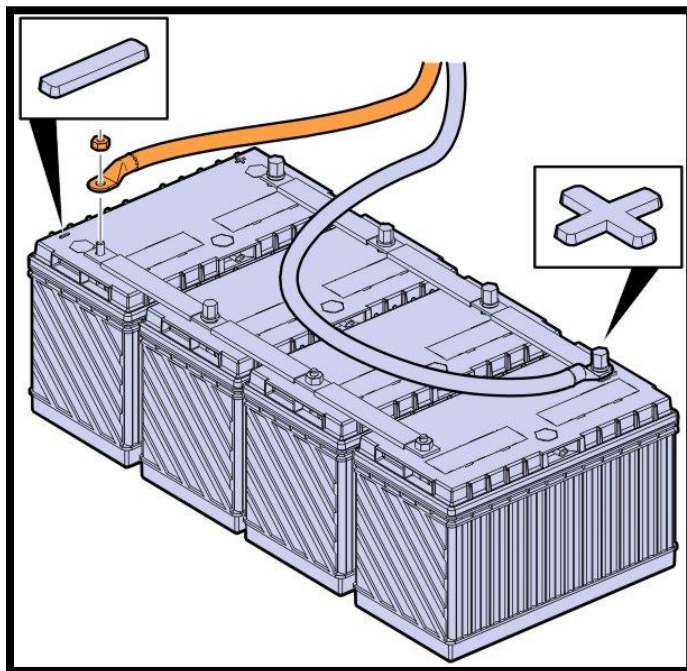

13. Remove the wheel chocks.

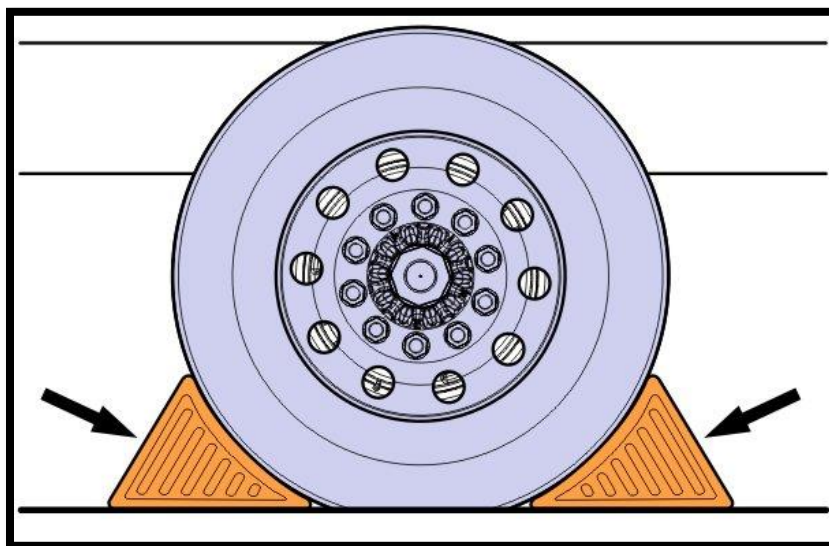

14. Return the vehicle to service.