




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

Date: November 28, 2023
To: Dealer Principal, General Manager, Service Manager, North American Dealer
Network
From: Richard Kenton, Technical Director
Dan Schwartz, Service Area Manager

Dear Dealers,

This bulletin is to inform you that, following reports of a slight elongation of the rear brake lever stroke over time and as a consequence of use, new rear brake hoses (ABS control unit to rear brake master cylinder – yellow, and ABS control unit to rear brake caliper - blue) are now available for the model concerned in order to prevent this condition.

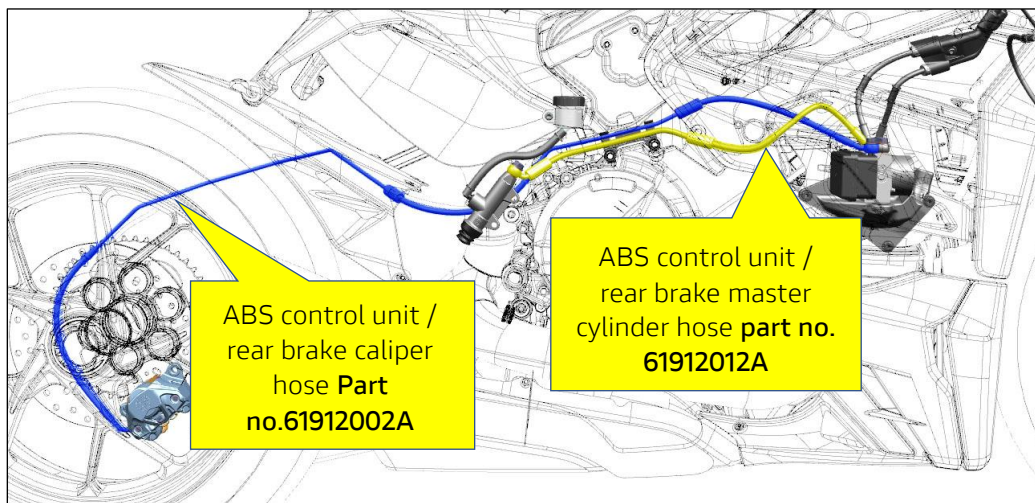

We remind you that the rear brake lines must be installed on vehicles if Clients complain about a slight elongation of the rear brake pedal travel over time and with use.

Always remind Clients that correct brake operation must always be checked before each use of the motorcycle, as indicated in the Use and Maintenance Manual, and that it is essential to have the braking systems maintained as prescribed in the maintenance schedule, changing the brake fluid every 24 months.

Moreover, we inform you that this upgrade is NOT mandatory, but optional since it has to be performed only if the Client reports such condition.



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011

Contents

	Page
Introduction	1
Contents	2
Application	2
Client Impact	2
Spare Parts	3
Parts Distribution	3
Warranty Reimbursement Rules	3
Service Solution	4
Part 1: Vehicle Preparation	5
Part 2: Rear Brake Hose Removal	10
Part 3: New Rear Brake Hose Installation	12
Part 4: Rear Brake System Filling and Bleeding	13
Part 5: Vehicle Refitting	15
Part 6: Rear Brake Pedal Travel Check	21

Application

This update is **NOT** listed in the **DCS VIN HISTORY**

We inform you that this upgrade is NOT mandatory, but optional since it must be performed only if the Client reports such symptom/condition.

If a Client complains about a slight elongation of the rear brake pedal travel over time and with use, it is necessary to order the replacement parts.

Client Impact

Clients will **NOT** be notified by dedicated communication.

Involved vehicles must be fitted with the updated rear brake hoses **ONLY** if the above-described operating concern is detected.



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011

Spare parts

The spare parts required for this update are:

- ABS control unit - rear brake master cylinder hose Part no. 61912012A
- ABS control unit / rear brake caliper hose Part no. 61912002A
- Copper washers part no. 85250241A (10pcs)
- Small and Big self-locking ties.

The required DOT4 brake fluid and self-locking ties (small and large) are easy to find consumables and should be sourced locally.

Parts Distribution

The above listed components required to carry out the upgrade under this Workshop Campaign must be ordered for each affected frame number.

The ties and DOT4 fluid to be used are easy to find consumables, it is not necessary to fill in any special spare part orders.

Warranty Reimbursement Rules

Rear brake hose installation reimbursement will be issued through the standard warranty claim procedure via the DCS.

We remind you that this update is NOT listed in the DCS VEHICLE HISTORY, but a NEW WARRANTY CLAIM must be filled. See procedure illustrated below.

The warranty claim is pre-filled and is identified as **CR258**.

The Dealer shall be reimbursed for the parts listed for the operation; copper washers (10) part no. 85250241A, ABS control unit/rear brake master cylinder hose no. 61912012A, ABS control unit/rear brake caliper hose Part no. 61912002A, the consumable ties and DOT 4 brake fluid; and labor for () that includes the time necessary for:

- Vehicle reception
- Rear brake hose removal
- Installation of new rear brake hose
- Filling and bleeding procedure of the rear brake system
- Soft cleaning of the vehicle
- Compensation for the cost of self-locking ties and DOT4 fluid used to fill the rear brake system.



CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

When creating the WCRC type claim, please fill in the following fields:

1. VIN number: **ZDMXXXXXXXXXXXXXX**
2. Claim Type: **WCRC - WARRANTY CLAIM RECALL CAMPAIGN**
3. Recall Campaign: **CR258 – SRV-TSB-23-011 REAR BRAKE HOSE REPLACEMENT**

The screenshot shows the 'NEW WARRANTY CLAIM' form in the DCS system. The form is titled 'NEW WARRANTY CLAIM' and has a 'NEW' status. The 'CLAIM TYPE' is set to 'WCRC - RECALL FOR Q'. The 'VIN NUMBER' is 'ZDM'. The 'DESCRIPTION' is 'SF V2'. The 'REF. CAMPAIGN' is 'CR258 - SRV-TSB-23-011 REAR BRAKE HOSES REPLACEMENT'. The form also has fields for 'CLAIM N.', 'CLAIM STATUS', 'DEALER', 'CLAIM DATE', 'APP. DATE', 'REP. DATE', 'MILEAGE', 'SERVICE POINT', 'UPLOAD FILE', 'DEFECT', and 'DEFECT CODE'. The form has buttons for 'RESET', 'SAVE', and 'SEND'.

Service Solution



WARNING

The replacement procedure of the rear brake hoses described in the document is not particularly difficult, however, for the operation to be completed successfully and to comply with the set time, it is necessary to thoroughly follow the sequence of the indicated operations.

We recommend taking your time to fully understand the procedure before attempting its implementation on the motorcycle (you may print the document in color for a better understanding).

We also remind you that the work environment where you carry out the procedure and the tools and equipment used (wrenches and gloves) must be clean.



NOTE

We hereby inform you that this operation is carried out exclusively on the primary circuit of the rear brake system for which it is sufficient to perform the traditional bleeding procedure; NO specific bleeding procedure is hence required for the secondary circuit (circuit inside the ABS control unit).



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011

Part 1: Vehicle Preparation


1. Position the motorcycle on the rear paddock stand.
2. Remove the rear wheel (see Sec. 07: "Chassis - Rear wheel").
3. Drain all the brake fluid contained inside the rear brake system (see Sect. 04 - Maintenance operation - Changing the rear brake circuit fluid).



WARNING

Brake fluid may damage the paint or parts of the motorcycle. Wash the affected area with plenty of water in case of accidental contact. Damage due to brake fluid spillage is not a warrantable defect and is the responsibility of the repairing dealer to correct.


4. Remove the upper RH fairing (see Sec. 05: "Fairing installation - Fairing" of the Workshop Manual).
5. Loosen the **3 special screws M5x10.5 (1)** securing the **hose guide (2)** on the swing arm.

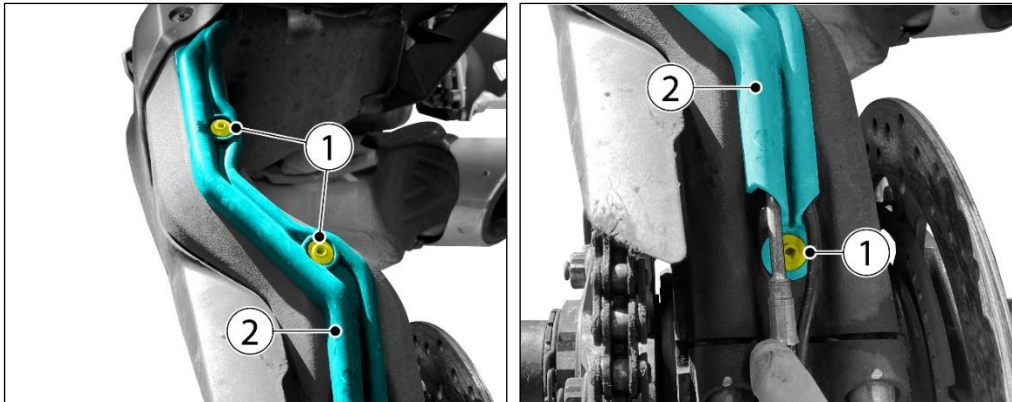




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

- Loosen the 4 special screws M5x9 (3) and remove the rear mudguard (4).

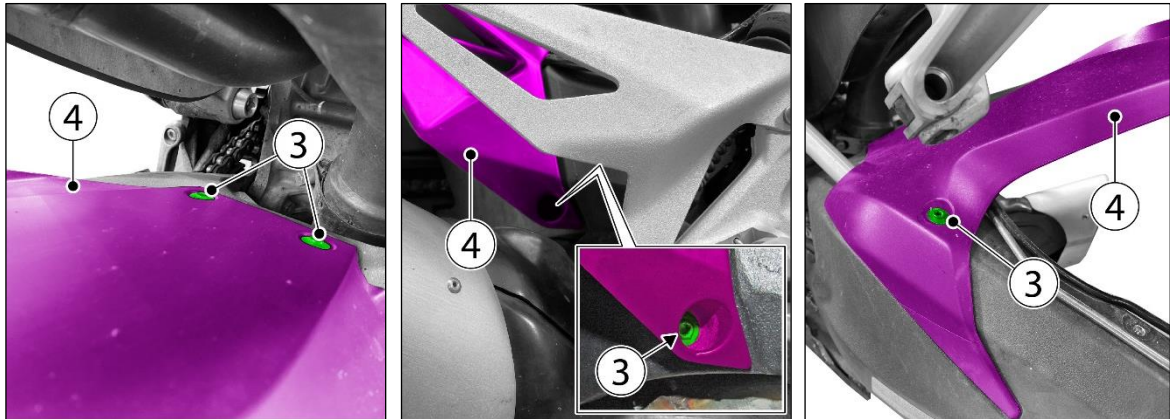

- Loosen the screw M6x14 (6) and move the rear brake fluid reservoir (11) away from the hose grommet (10).

Loosen the 3 special nuts M5x11 (7) and remove the button tie (5).

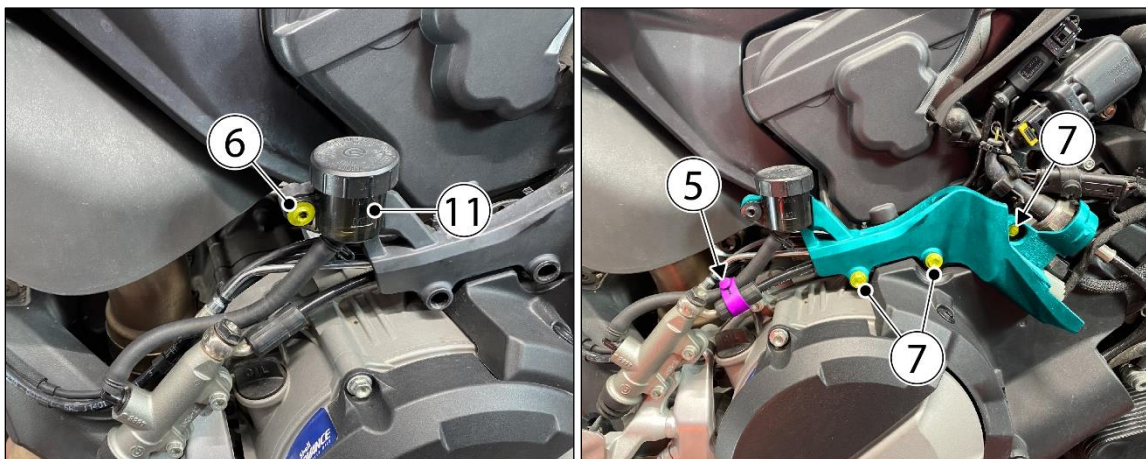





CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)
Technical Service Bulletin SRV-TSB-23-011



- Slide out the **lambda sensor connector (8)** and remove the **hose grommet (10)**.



NOTE
Recover the **3 washers (9)**.

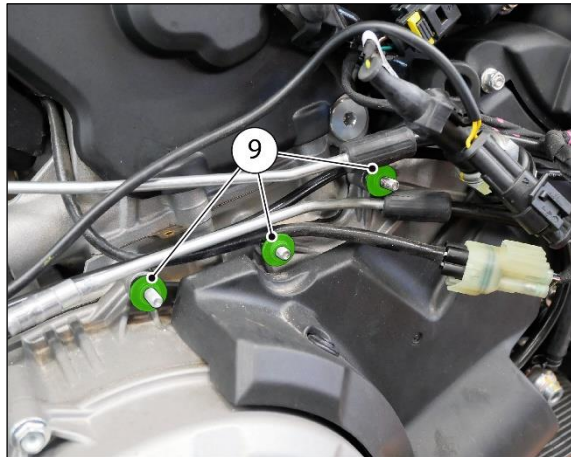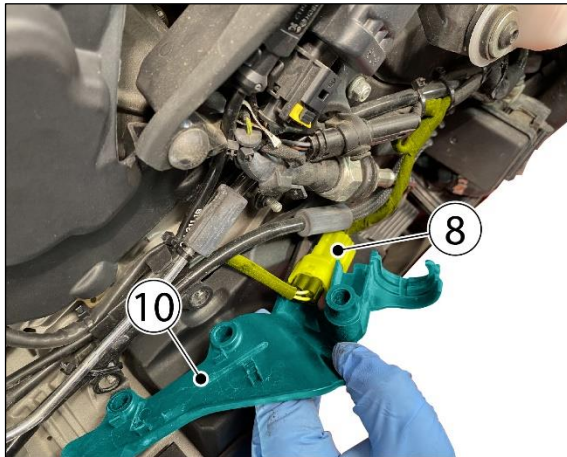


- Disconnect the **pressure switch (12)** and remove the **button tie (13)**.

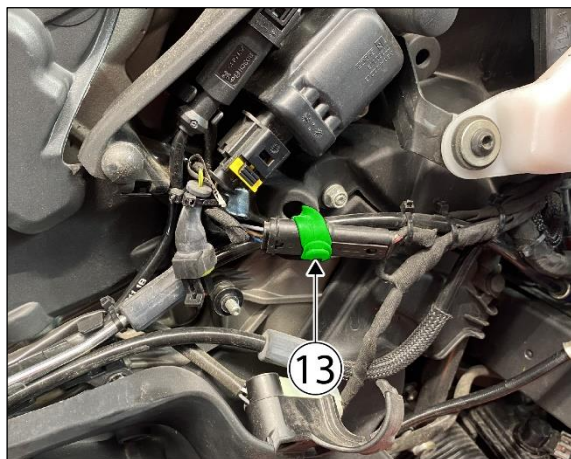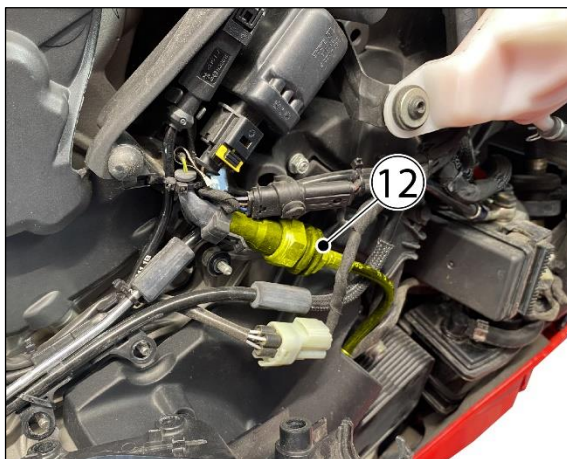



CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

10. Remove the **2 big self-locking ties (19)** that tie the **ABS control unit / rear brake master cylinder hose (16)** to:
 - main wiring RH rear upper branch
 - main wiring RH rear lower branch
 - secondary air actuator wiring branch
11. Remove the **2 small self-locking ties (18)** that tie the **ABS control unit / rear brake caliper hose (15)** to:
 - main wiring RH rear upper branch
 - secondary air actuator wiring branch
12. Remove the **small self-locking tie (17)** that tie the **hose grommet (10)** to the **ABS control unit / rear brake master cylinder hose (16)**.

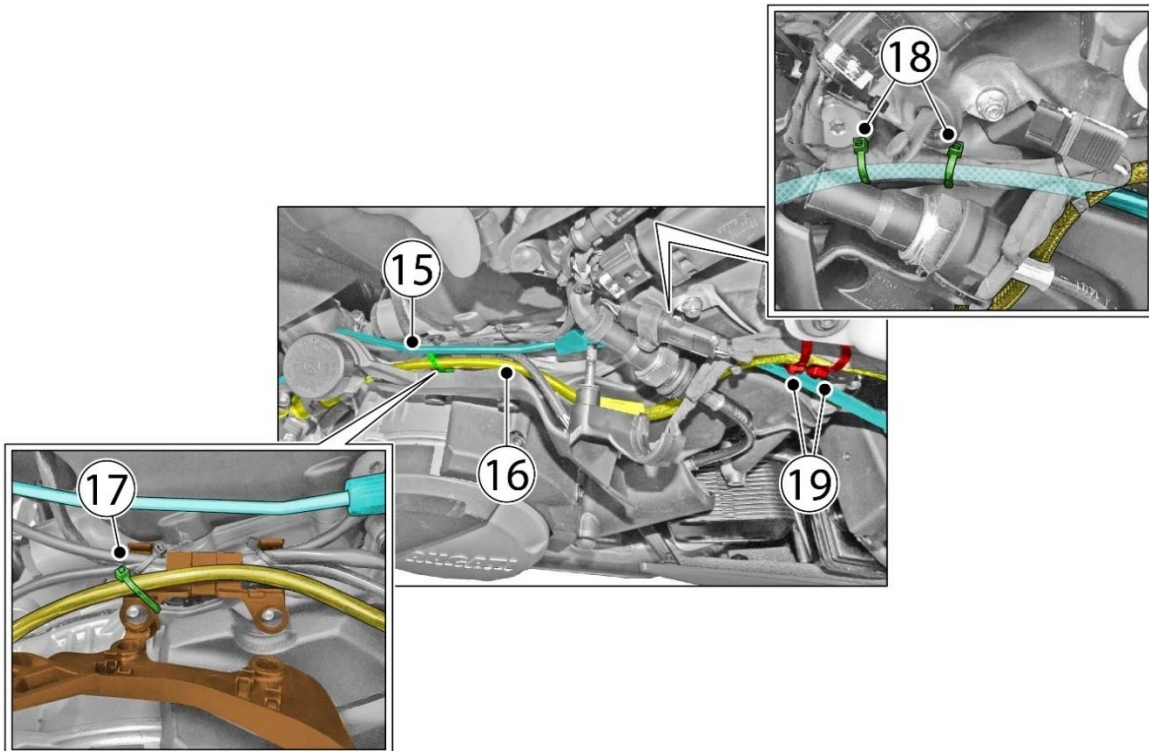




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

13. Remove the 2 small self-locking ties (20) that tie the ABS control unit / rear brake caliper hose (15) to:

- the rear speed sensor cable
- the rear stop sensor cable


Remove the 2 fast points (21) that fix the ABS control unit/rear brake caliper hose (15) to the rear speed sensor cable.

14. Remove the 5 small self-locking ties (22) that tie the ABS control unit / rear brake caliper hose (15) to the rear speed sensor cable.

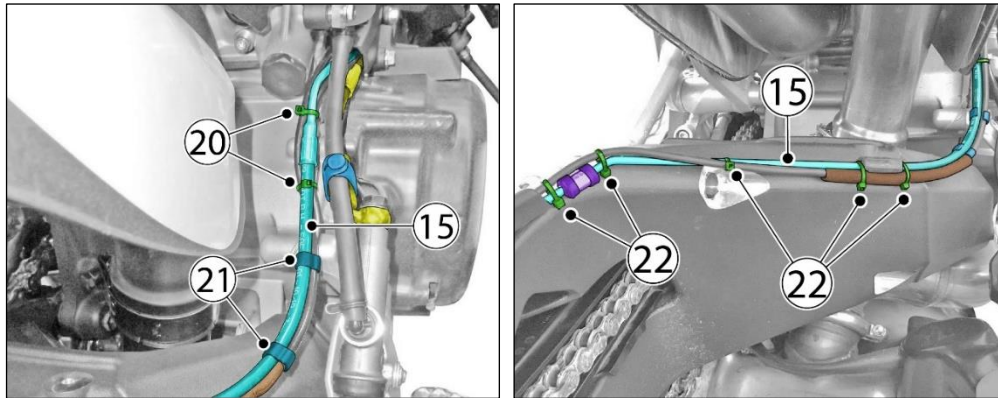

15. Loosen the M6x16 screw (27) and release the rear brake hose from the hose guide (28).

16. Remove the 3 fast points (23) that fix the ABS control unit/rear brake caliper hose (15) to the rear speed sensor cable.

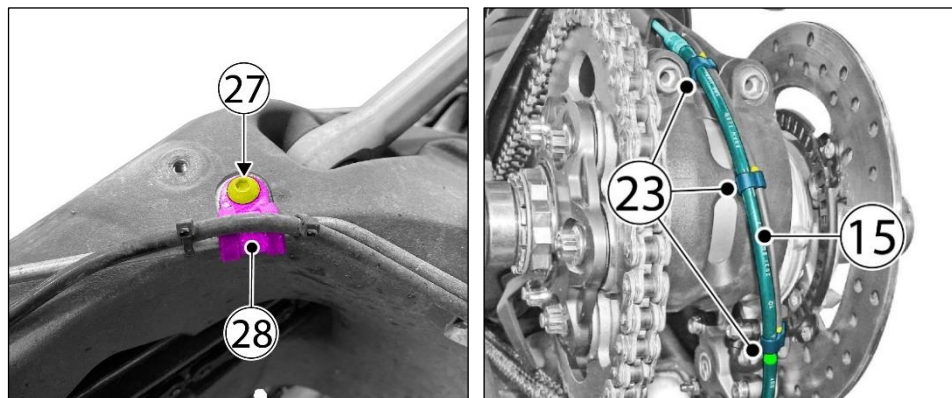



CR258 – Rear Brake Hoses Replacement



Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011



Part 2: Rear Brake Hose Removal

Brake hose connecting the ABS control unit to the rear brake caliper

1. Loosen the **M10x1 special screw (25)** and remove the **2 copper washers (26)**.

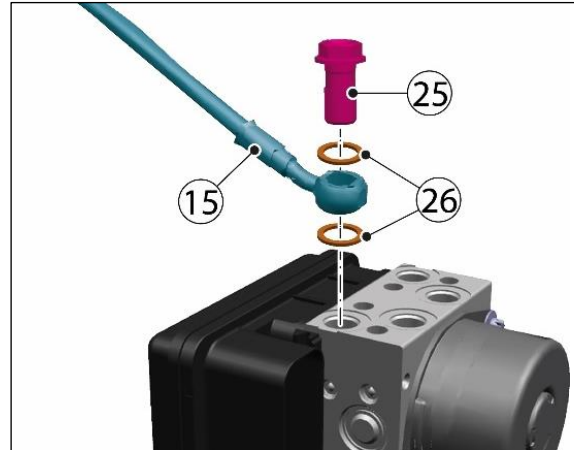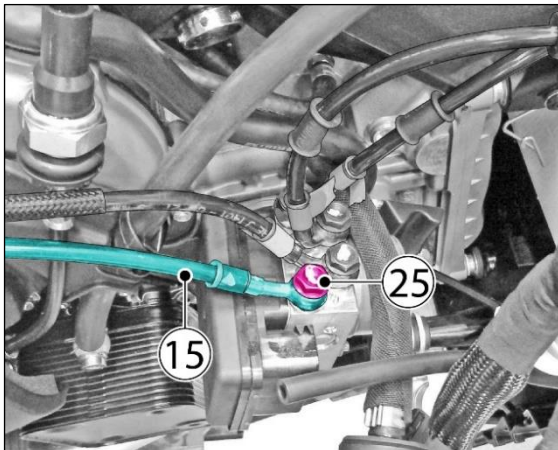

2. Loosen the **M10x1 special screw (25)** and remove the **2 copper washers (26)**.

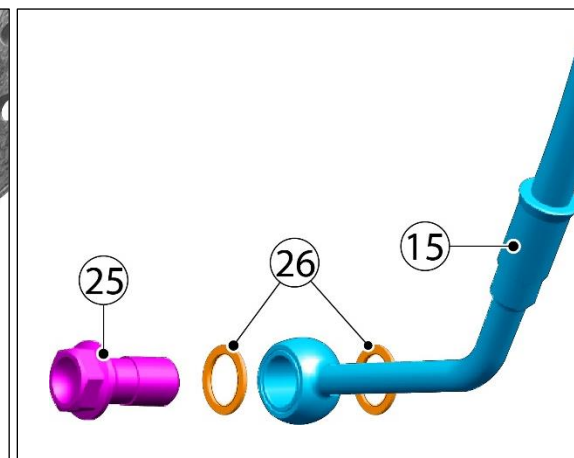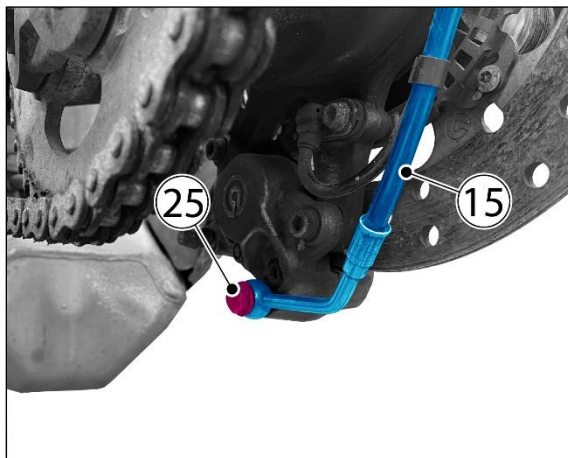

3. Loosen Slide out the brake hose (21) connecting the ABS control unit to the rear brake caliper.





CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)



Technical Service Bulletin SRV-TSB-23-011

Brake hose connecting the ABS control unit to the rear brake master cylinder

1. Loosen the M10x1 special screw (23) and remove the 2 copper washers (24).

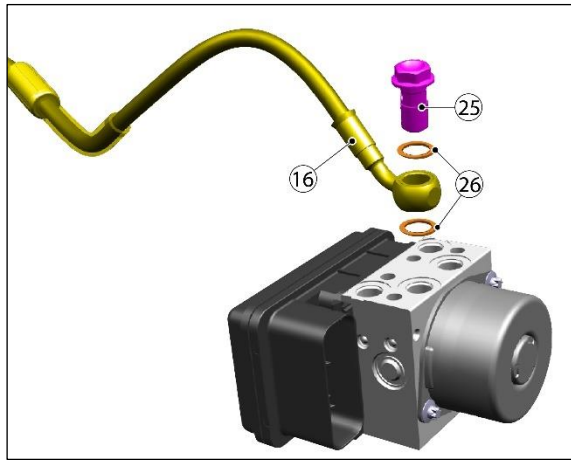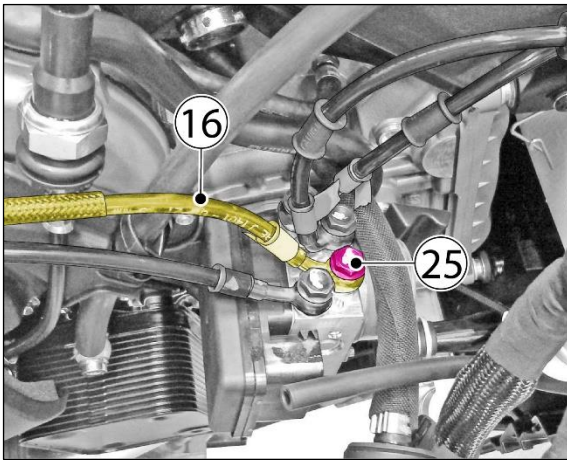

2. Loosen the M10x1 special screw (25) and remove the 2 copper washers (26).

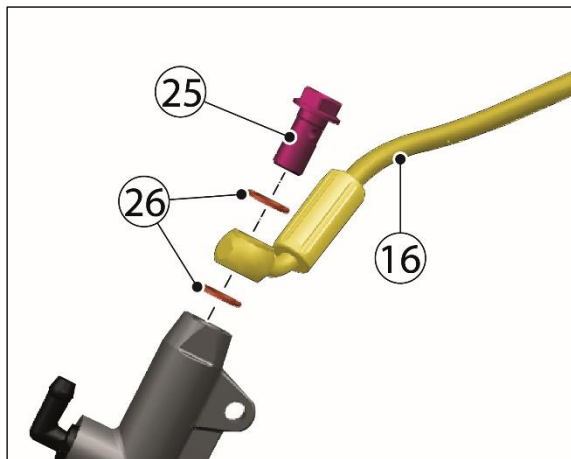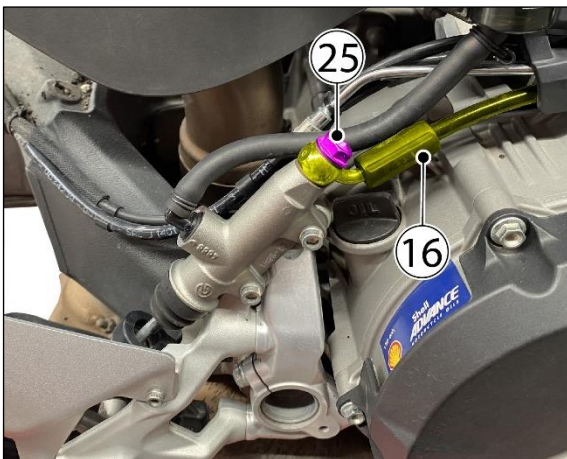

3. Slide out the brake hose (16) connecting the ABS control unit to the rear brake master cylinder.



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011

Part 3: New Rear Brake Hose Installation




NOTE

The new brake hose can be recognized by the different chamfering that characterizes the end part of the fittings



Brake hose connecting the ABS control unit to the rear brake master cylinder

1. Position the new brake hose (A) connecting the ABS control unit to the rear brake master cylinder.
2. Fasten the union to the ABS control unit while installing 2 new copper washers (B) and tighten the special screw M10x1 (25) to a tightening torque of 27 Nm ± 1.5 Nm.
3. Fasten the rear brake master cylinder union using 2 new copper washers (B) and tighten the special screw M10x1 (18) to a tightening torque of 27 Nm ± 1.5 Nm.

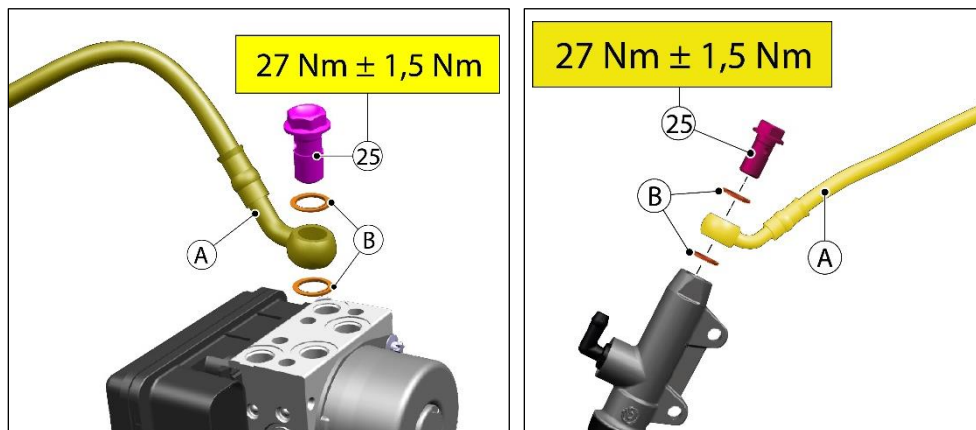




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011


Brake hose connecting the ABS control unit to the rear brake caliper

1. Position the brake **hose (C)** connecting the ABS control unit to the rear brake caliper.
2. Fasten the ABS control unit union to the ABS control unit while installing **2 new copper washers (B)** and tighten the **special screw M10x1 (25)** to a tightening torque of **27 Nm ± 1.5 Nm**.
3. Fasten the rear brake caliper union using **2 new copper washers (B)** and tighten the **special screw M10x1 (25)** to a tightening torque of **27 Nm ± 1.5 Nm**.

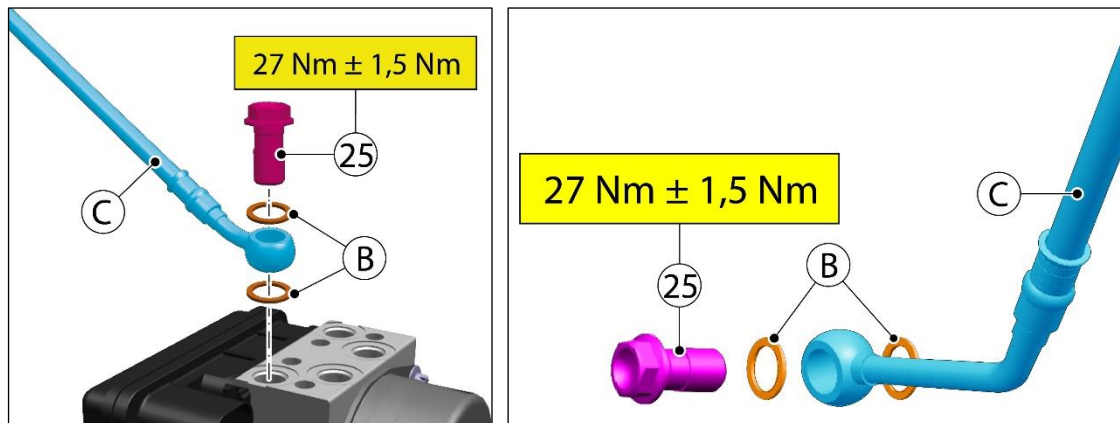

Part 4: Rear Brake System Filling and Bleeding

1. Loosen the **2 screws M8x20 (29)** and remove the rear brake caliper.

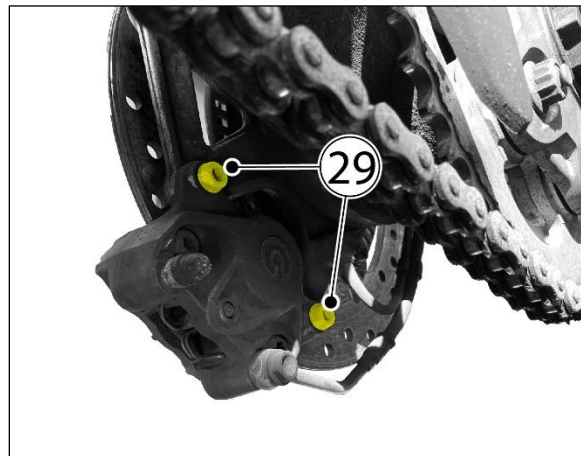



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011


2. Proceed with the DOT4 fluid filling inside the rear brake system and bleed the system following the procedure indicated in the bulletin SRV-TTB-17-002.



WARNING

Remember that the brake fluid can damage the paint or parts of the motorcycle.
Wash the affected area with plenty of water in case of accidental contact.

3. Secure the **rear brake caliper (30)** on its support plate and tighten the **2 screws M8x20 (29)** to a tightening torque of **$25\text{Nm} \pm 5\%$** (with certification) using GADUS S2 V220 AD 2 grease.

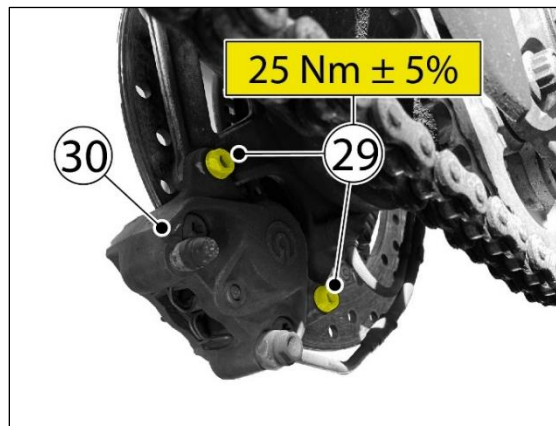




CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011

Part 5: Vehicle Refitting


1. Use the **2 big self-locking ties (D)** to tie the **ABS control unit / rear brake master cylinder hose (A)** to:
 - main wiring RH rear upper branch
 - main wiring RH rear lower branch
 - secondary air actuator wiring branch
2. Use the **2 small self-locking ties (E)** to tie the **ABS control unit / rear brake caliper hose (C)** to:
 - main wiring RH rear upper branch
 - secondary air actuator wiring branch
3. Use the **small self-locking tie (F)** to tie the **hose grommet (10)** to the **ABS control unit / rear brake master cylinder hose (A)**.

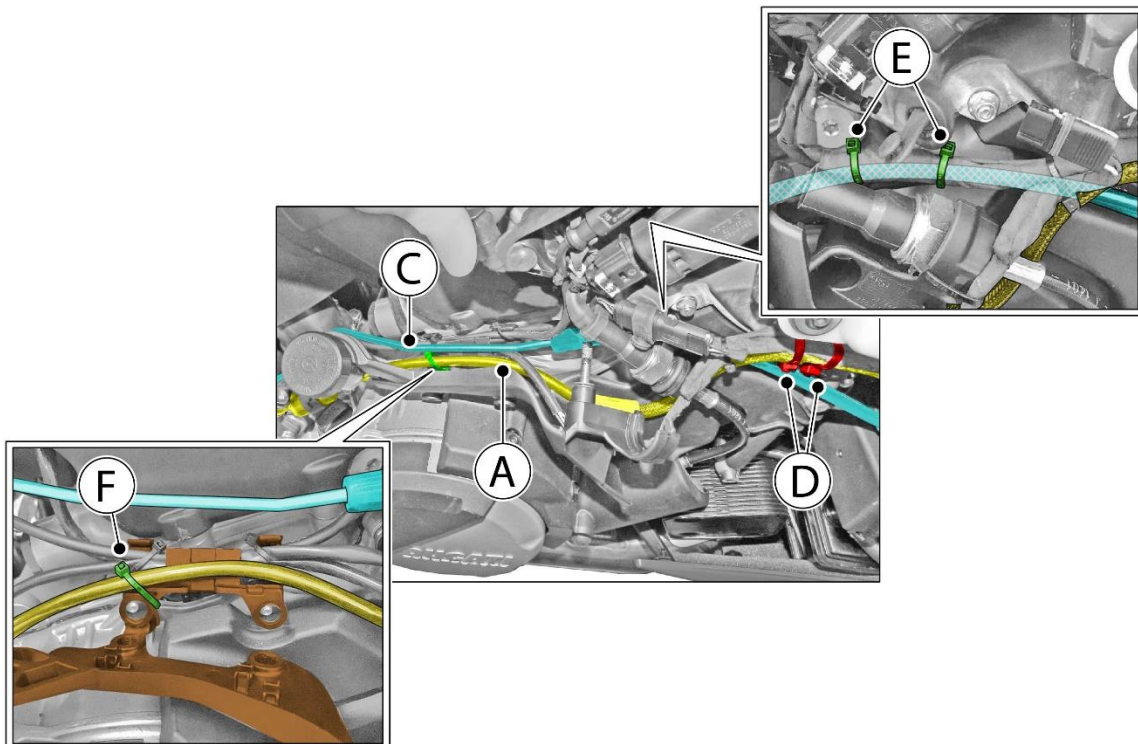




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

4. Secure the rear stop cable connector with a **button tie (13)** and connect the **pressure switch (12)**.

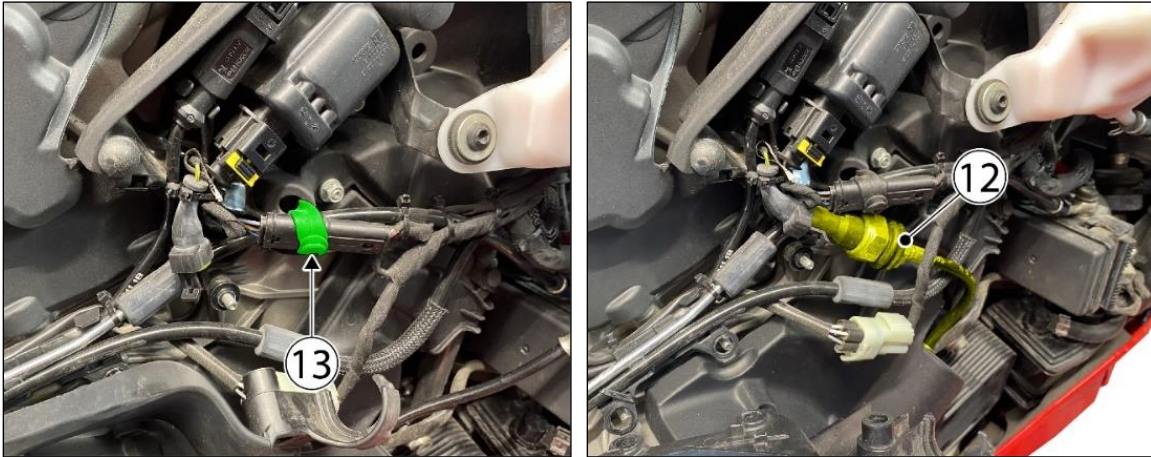


5. Insert the **lambda sensor connector (8)** in the **hose grommet (10)**.

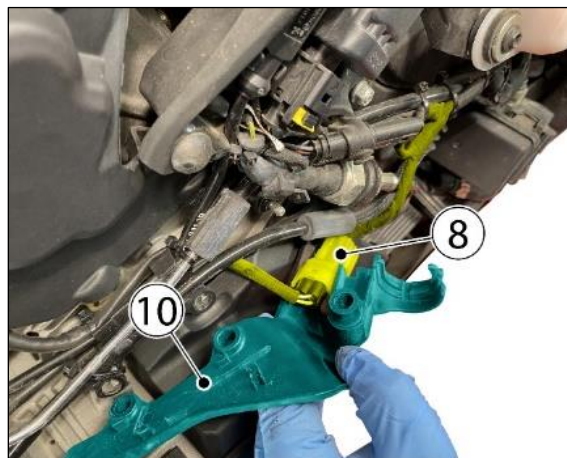




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

6. Install the **3 washers (9)** and the **hose grommet (10)** and secure it with the **3 special nuts M5x11 (7)**, tightening them to a torque of **6 Nm ± 10%**.

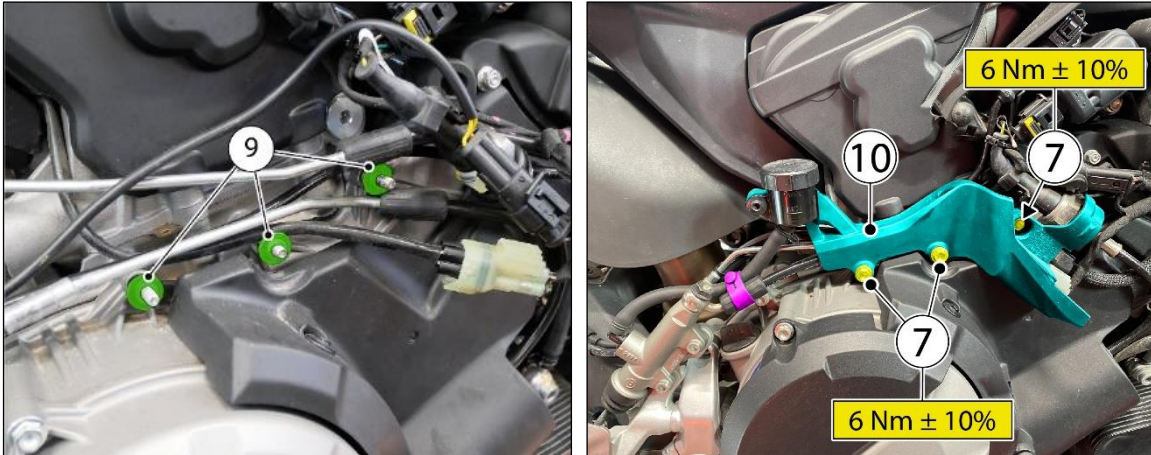

7. Position the rear brake fluid **reservoir (11)** on the **hose grommet (10)** along with the **button tie (5)** around the hoses and tighten the **M6x14 screw (6)** to a torque of **2 Nm ± 10%**.

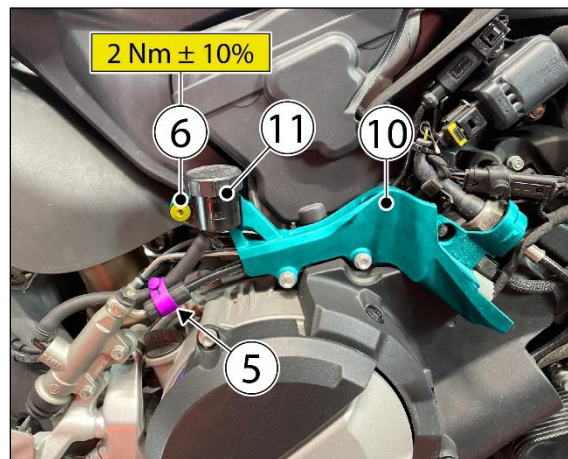



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011




WARNING


When repositioning the rear brake hose, pay special attention to the fastenings for the rear speed sensor wiring along the swing arm.

8. Join the **ABS control unit/rear brake caliper hose (C)** with the rear speed sensor cable using **3 fast points (23)**.

Slide the **ABS control unit/rear brake caliper hose (C)** inside the **hose grommet (28)** and tighten the **M6x16 screw (27)** to a torque of **8 Nm ± 10 Nm**.

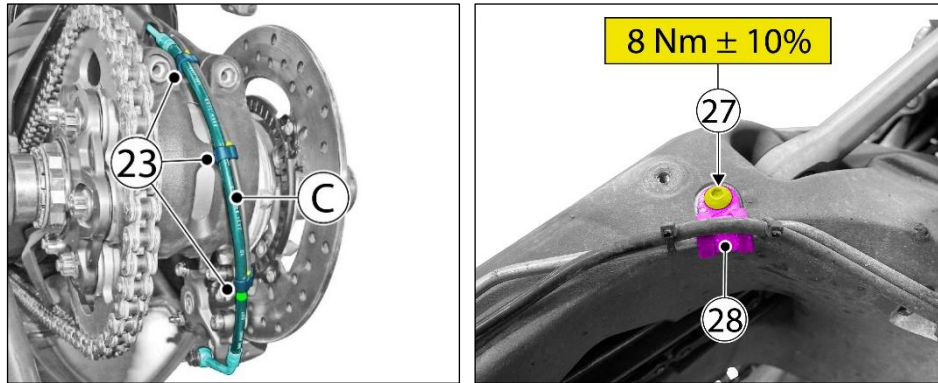

9. Join the **ABS control unit/rear brake caliper hose (C)** with the rear speed sensor cable using **5 small self-locking ties (G)** and position them as shown in the figure.

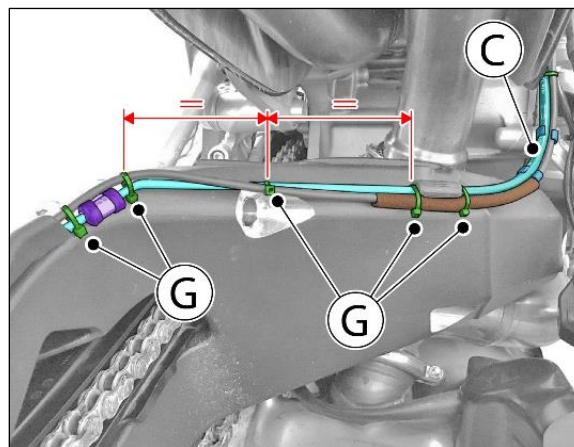




CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011


10. Use the **2 small self-locking ties (G)** to tie the **ABS control unit / rear brake caliper hose (C)** to:

- the rear speed sensor cable
- the rear stop sensor cable

Use the **2 fast points (21)** to fix the **ABS control unit/rear brake caliper hose (C)** to the rear speed sensor cable.

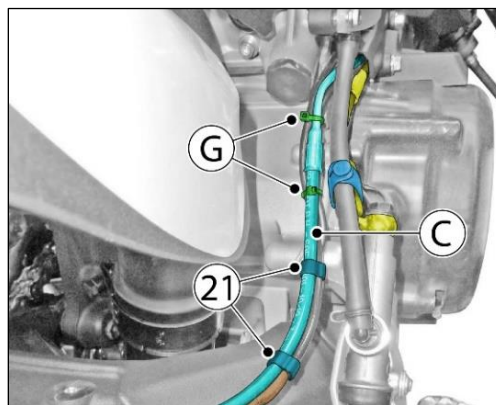


11. Position the rear mudguard (4) and tighten the **4 M5x9 special screws (3)** to a torque of **5 Nm ± 10%**.

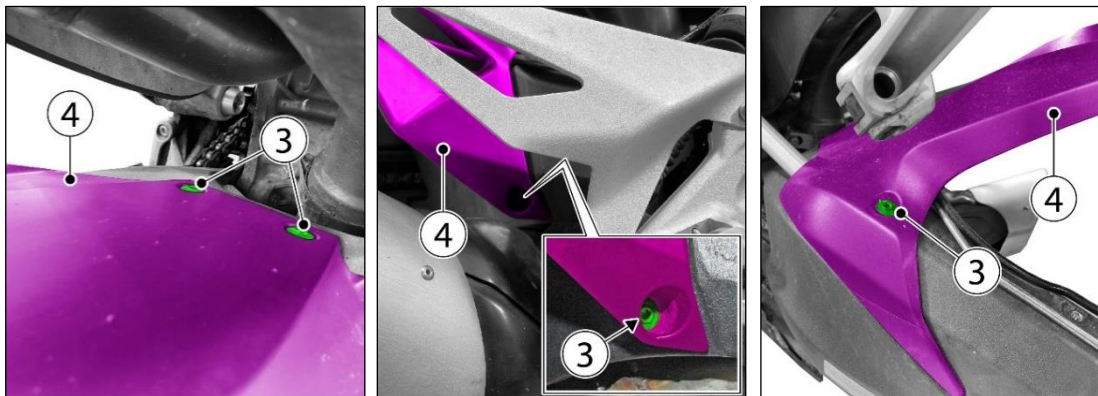



CR258 – Rear Brake Hoses Replacement Streetfighter V2 Model Year 2022-2023 (all model versions) Technical Service Bulletin SRV-TSB-23-011

12. Position the hose guide (2) on the swing arm and tighten the 3 M5x10.5 special screws (1) to a torque of 3.5 Nm ± 10%.

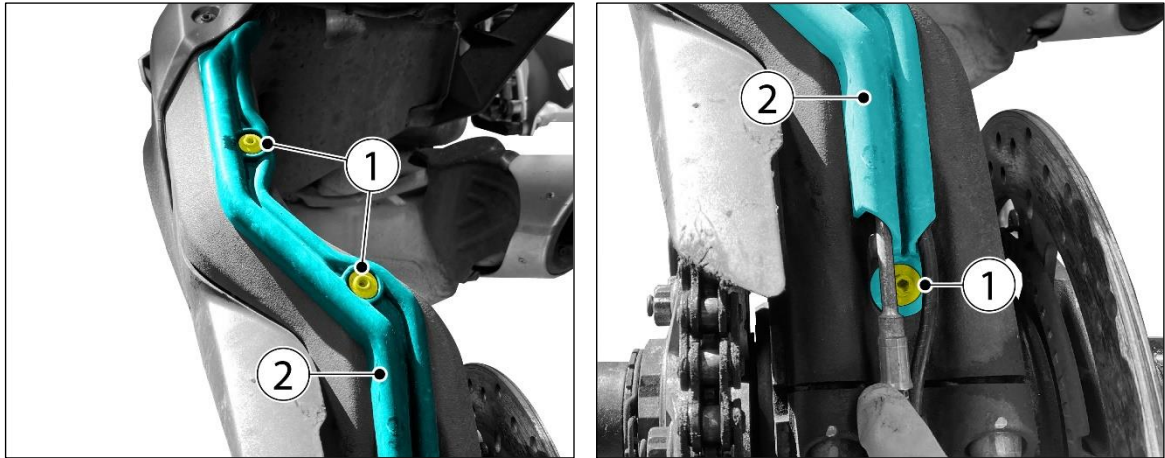

13. Refit the rear wheel (see Sec. 07: "Chassis - Rear wheel").
14. Fit the upper RH fairing (see Sec. 05: "Fairing installation - Fairing" of the Workshop Manual).



WARNING

Make sure that the **ABS control unit / rear brake caliper hose (C)** and the rear speed sensor cable will insert inside the mudguard in the position indicated by the blue arrow.





CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011


Part 6: Rear Brake Pedal Travel Check



NOTE

The figures shown for the following procedure are for illustration purposes only.

1. Measure height **(A1)** between rear brake lever lower end and load-bearing surface; brake lever must be in rest position (upper limit stop).
2. Slowly position the 8 kg weight onto rear brake lever; then measure height **(B1)** between rear brake lever lower end and load-bearing surface.

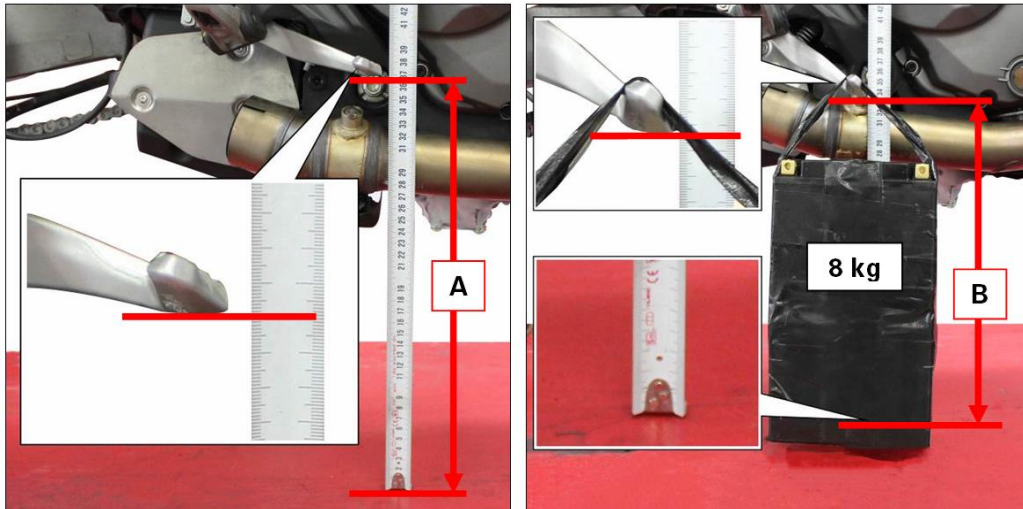

3. Note the difference between the measured heights **(A1)** and **(B1)**.

$$\text{Rear brake lever stroke 1} = (A1) - (B1)$$

4. Test ride the vehicle on the road at a speed of about 30 MPH (50 Km/h) and, by operating only the rear brake, brake until the ABS is engaged at least 10 times.
5. Measure again the rear brake lever stroke as referred to under section (1) and (2).



CR258 – Rear Brake Hoses Replacement

Streetfighter V2 Model Year 2022-2023 (all model versions)

Technical Service Bulletin SRV-TSB-23-011



WARNING

The measurement of the rear brake lever stroke required must be taken with the same temperature conditions as the previous measurement. Therefore, if the measurement was taken with cold engine, it will be necessary to wait for 2 hours before proceeding.

6. Note the difference between the measured heights **(A2)** and **(B2)**.

$$\text{Rear brake lever stroke 2} = (\text{A2}) - (\text{B2})$$

7. Compare the 2 stroke values of the rear brake lever.
 - If a stroke increase of the rear brake lever is detected, repeat the whole bleed procedure.
 - Once the new bleeding procedure is completed, check that the stroke of the rear brake lever has not increased.
8. Remove the motorcycle from the rear paddock stand.
9. Perform a soft cleaning of the motorcycle before delivering it to the Client.

For questions on this Workshop Campaign,
please contact your Service Area Manager.