

Subject: Information on Rear License Plate Installation

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Equinox EV	2024	2024				

Involved Region or Country	North America, Israel, Palestine, Brazil (Mercosur), Chile (West), Colombia (West), Ecuador (West), Uruguay (West), GM Korea Company
Additional Options (RPOs)	
Condition	As part of the PDI inspection, dealers may have concerns on how to properly install the rear license plate to the rear fascia.
Information	This bulletin will provide details on how to effectively install the rear license plate.
Correction	Refer to the Service Procedure below.


Service Procedure

Important: Service agents must comply with all International, Federal, State, Provincial, and/or Local laws applicable to the activities it performs under this bulletin, including but not limited to handling, deploying, preparing, classifying, packaging, marking, labeling, and shipping dangerous goods. In the event of a conflict between the procedures set forth in this bulletin and the laws that apply to your dealership, you must follow those applicable laws.

Important: This technical service bulletin (TSB) can only be completed by certified repair facilities who have met all specific training, tool and equipment requirements pertaining to the vehicle Brand and Model serviced. Repairs must be performed by a technician who has successfully completed the required training.

1. Drill a 3/16" hole prior to the plate install for U.S., Mexico, and Canada. The visual below shows the 4 locations to drill into on the rear fascia.

Note: For other regions, drill a 3/16" hole as required.

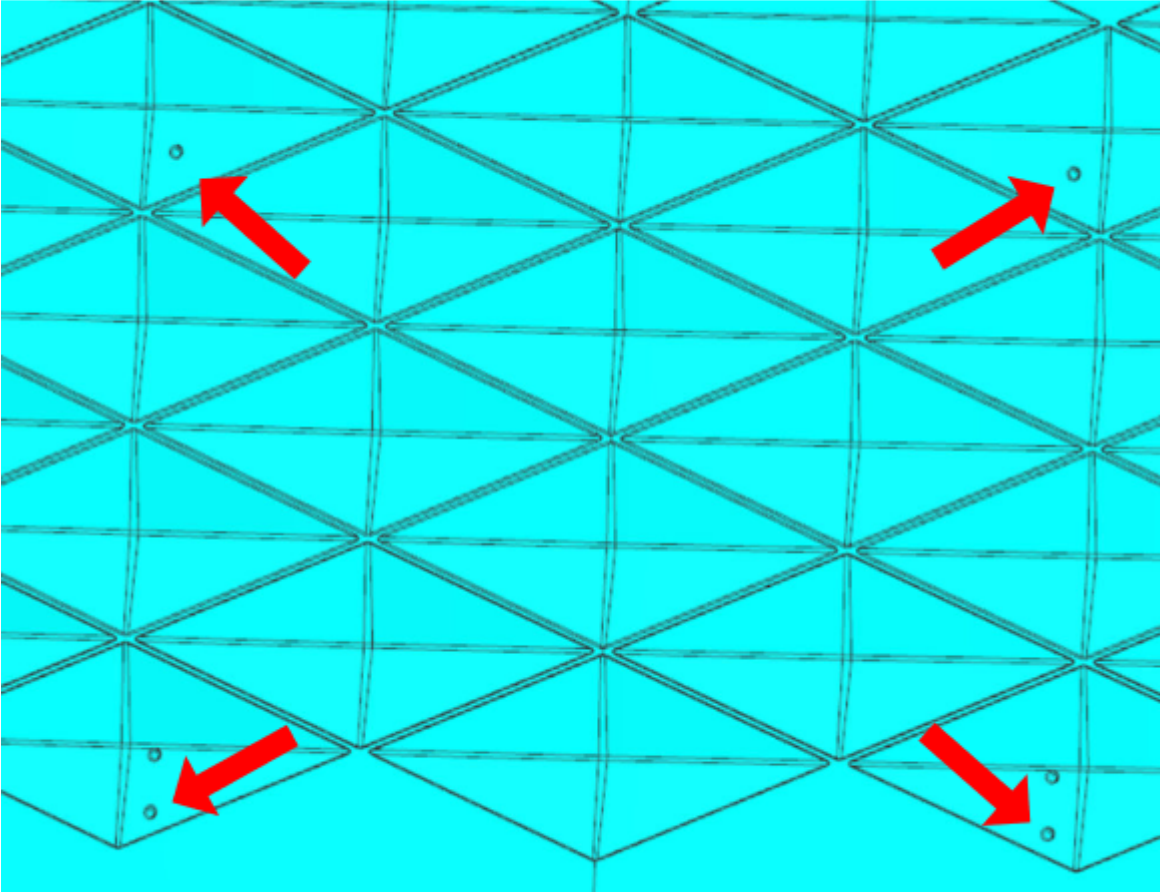

6506314

2. The plate screws will be provided in the vehicle. Install the license plate as appropriate.

Ver- sion	1
Modi- fied	Released December 21, 2023