

Hose union check: Connection hose to inclined seat filter



Preparation: Disconnect the device from the power supply and depressurize it



Pull out the power cord




Put Lever B to B-1

Step 1: Remove the plate at the back




Unscrew those 4 screws

Step 2: Unscrew the nut and slide it upwards

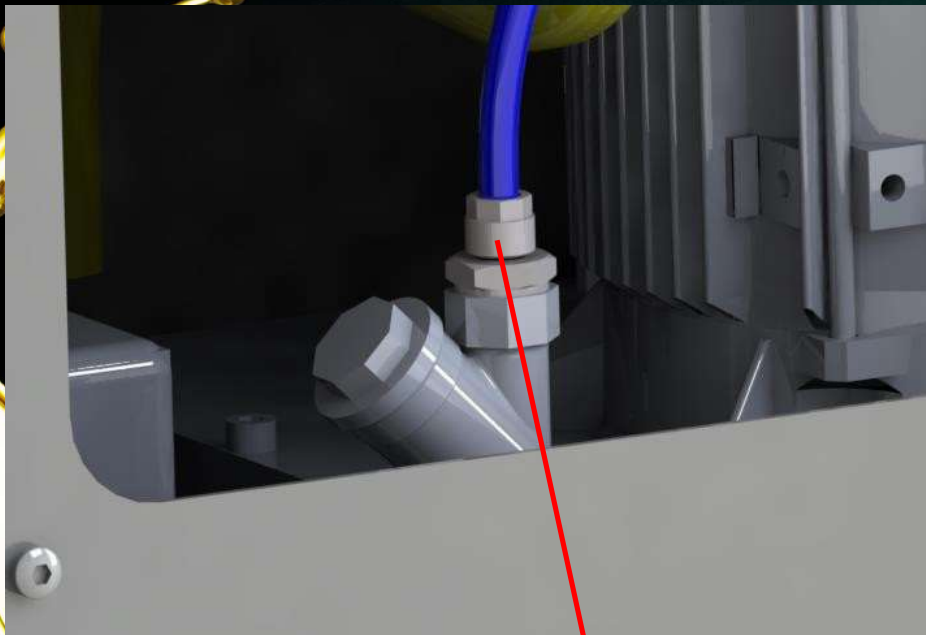


Unscrew this nut

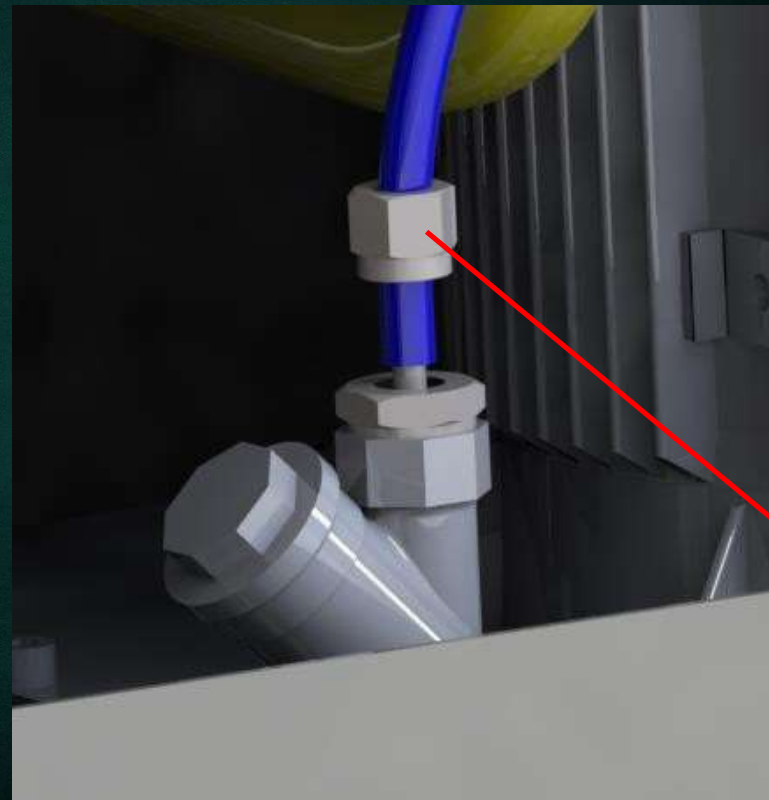

Slide it upwards

Step 3: Screw the nut back onto the fitting

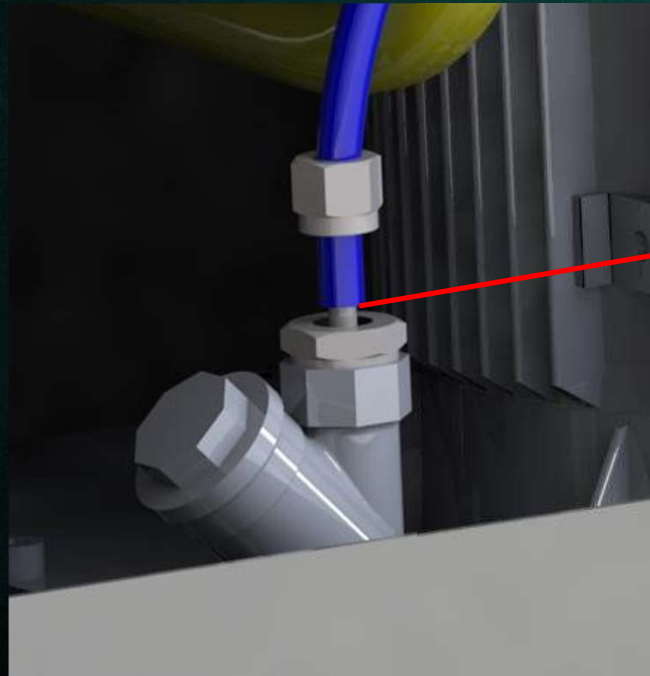

Put a drop of medium strength threadlocker on the thread of the fitting and screw the nut back onto the fitting until it's hand tight

Step 4: Reassemble the plate at the back



4 screws