BAUER NE LOCK QUICK REFERENCE


TI-189

DOORS

Bauer NE Battery Installation (Fig. 1)

1. Carefully remove 2 (two) 4x40 screws (A).
2. Install 4 fresh AA batteries (B) according to the orientation symbols (C).
3. Install Battery Compartment Lid (D) by aligning the 3 tabs and 3 slots (E).
4. Carefully install the 4x40 screws to attach Battery Compartment Lid.

Fig. 1

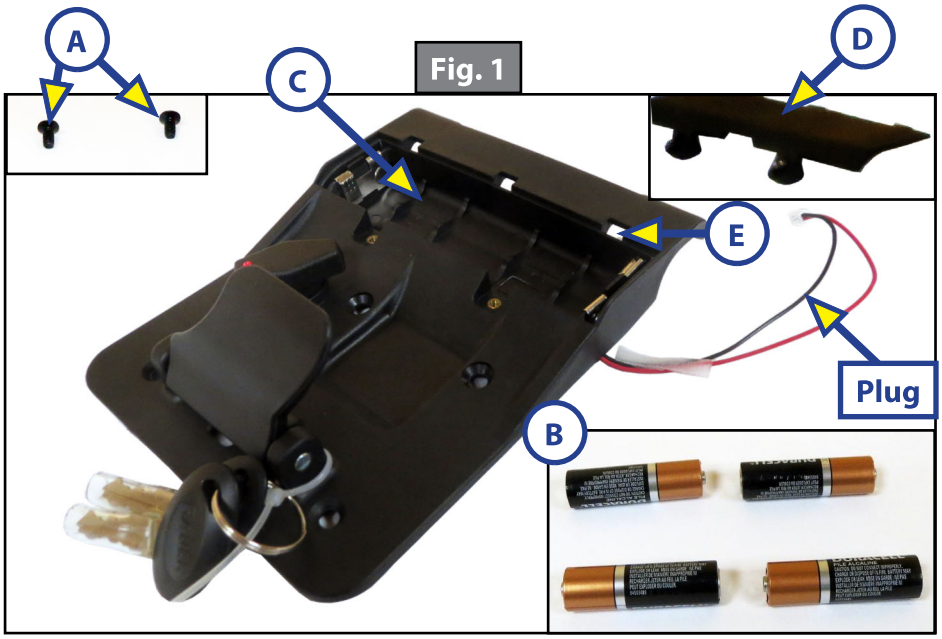


NOTE: Please enter your Personal Code (Fig. 2, Step. 4) upon installation of lock to prevent inadvertent programming.

Bauer NE Lock Operation (Fig. 2)


1. Touch the area next to the buttons to "Wake Up" the lock (F).
2. The Buttons will illuminate when the lock is "awake" and will be ready to accept the code.
3. The factory default code is 3, 7, 1, 5 and is followed by the Enter button (G).
4. Touch and hold the 3|4 button (H) and Enter button (G) for 2 seconds. The lock will beep 3 times to accept a new code. Enter a 4-digit code followed by the Enter button (G). The lock will beep 4 times to indicate a new code acceptance. This is now your new code.

Fig. 2

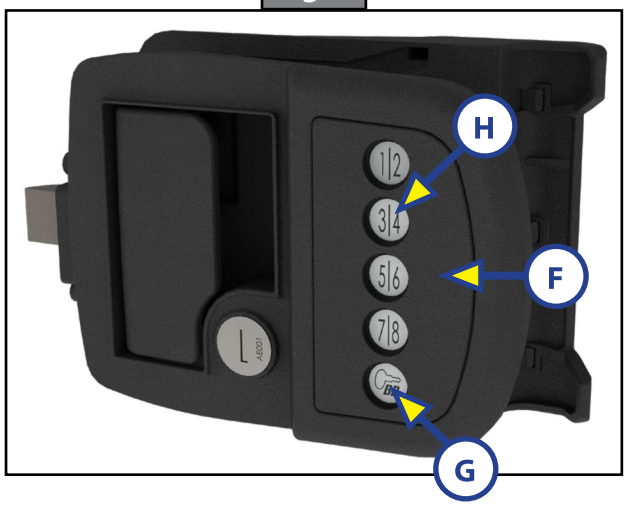

LIPPERT

Lippert
Service and Warranty
(432) 547-7378
lippert.com



Bauer NE



Bauer Products Inc.
1-866-68-BAUER (22837)
www.bauerproducts.com

As a supplier of a broad array of highly-engineered components in the recreation and transportation product markets, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at 432-LIPPERT (432-547-7378) or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lippert.com or by downloading the LippertNOW app.