4000 SERIES WINDOW SASH VENT REPLACEMENT

TI-504

WINDOWS

Purpose

This document outlines the steps for replacing the top hinge sash vent of the 4000 Series window.

Resources Required

- Phillips screwdriver
- Stepladder

Procedure

NOTE: The sash vent replacement is to be completed with the window installed in the RV. The following photos are for illustrative purposes only.

Vented Windows


1. Open window halfway (Fig. 1) then remove the two screws from the top of the frame (Fig. 2A).

NOTE: Opening the window more than halfway when removing the screw could cause binding.

Fig. 1



Fig. 2

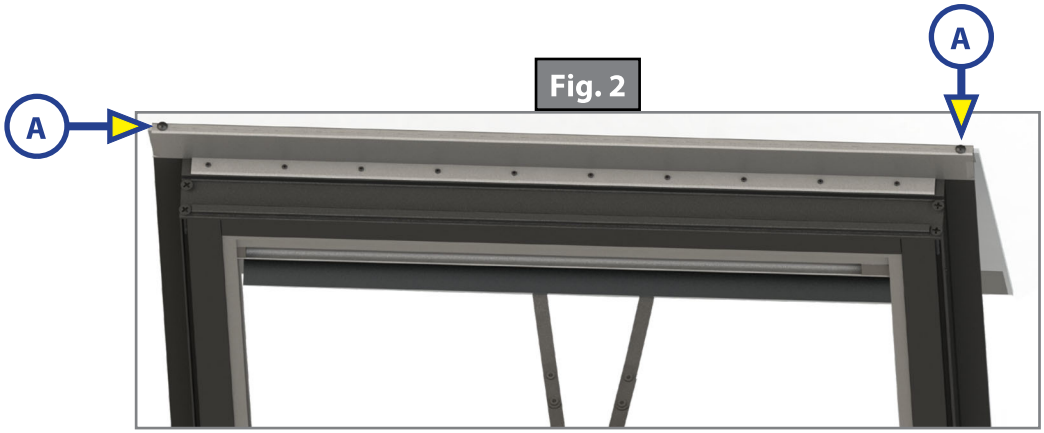

2. Slowly slide out the sash vent(s) and completely remove the sash vent and set aside (Fig. 3).

Fig. 3



3. Reinstall the new sash vent part (Fig. 4) until the edge of the sash vent lines up on both sides (Fig. 4A).
4. Reinstall the two screws on top of the frame (Fig. 2A).
5. Close the window(s).

Fig. 4

