



Countries: BAHAMAS, BOLIVIA, BRAZIL, BELIZE, CHILE, COLOMBIA, COSTA RICA, DOMINICAN REPUBLIC, ECUADOR, EL SALVADOR, GUATEMALA, GUYANA, HAITI, HONDURAS, JAMAICA, MEXICO, ARUBA, NICARAGUA, PANAMA, PERU, PUERTO RICO, TRINIDAD AND TOBAGO, URUGUAY, VENEZUELA, Curaçao

Document ID: IK1201500

Availability: ISIS, FleetSIS, NotSIR

Major System: ENGINE

Current Language: English

Other Languages: NONE

Viewed: 25

Revision: 0

Created: 10/30/2024

Last Modified: 11/19/2024

Author: Jaime Romo

[Less Info](#)

Hide Details

Coding Information

Copy Link 	Copy Relative Link 	Bookmark View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful 0	Not Helpful 0
----------------------	-------------------------------	--	-----------------------------	------------------	-----------------------------	-------------------------	-----------------------------

Title: LT /RH/HX Engine Top Mounted Air Filter Cover Installation

Applies To: LT/RH/HX/ trucks equipped with A26, S13, and Cummins X15 engines

CHANGE LOG

Please refer to the change log text box below for recent changes to this article:

11/19/2024 - Initial Article Release

DESCRIPTION

To improve the product's durability and prevent future damage for A26, S13, and Cummins X15-powered vehicles, International is sending this communication to the service network to ensure proper torque spec has been applied to the air filter assembly access cover fasteners when servicing the air filter(s).

SYMPTOM(s)

DTC/Light	Description
N/A	N/A

SPECIAL TOOL(s) / SOFTWARE

Tool Description	Tool Number	Comments	Instructions
N/Z	N/A		

SERVICE PARTS INFORMATION

Kit Description	Part Number	Quantity Required	Notes
N/A	N/A		

DIAGNOSTIC STEP(S)

N/A

INSTALLATION STEP(S)

WARNING! To prevent property damage, personal injury, and / or death, park vehicle on a hard, flat surface, turn the engine off, set the parking brake, and install wheel chocks to prevent the vehicle from moving in either direction.

WARNING! To prevent property damage, personal injury, and / or death, if the vehicle must be raised, do not work under the vehicle supported only by jacks. Jacks can slip or fall over.

WARNING! To prevent personal injury and / or death, always wear safe eye protection when performing vehicle maintenance.

WARNING! To prevent property damage, personal injury, and / or death, keep flames or sparks away from vehicle and do not smoke while servicing the vehicle's batteries. Batteries expel explosive gases.

WARNING! To prevent property damage, personal injury, and / or death, remove the ground cable from the negative terminal of the battery box before disconnecting any electrical components. Always connect the ground cable last.

Purpose:	Ensure the technician or customer applies the correct torque spec when installing the air filter cover fasteners
Product Line:	LT/RH/HX/ trucks equipped with A26, S13, and Cummins X15 engines


Qualification

LT /RH/HX Engine Top Mounted Air Filter assembly:

- Vehicles build with A26, S13 and Cummins X15 engine.

Actions

Follow the Service Manual to obtain the most relevant information and procedure for servicing the air filter(s).

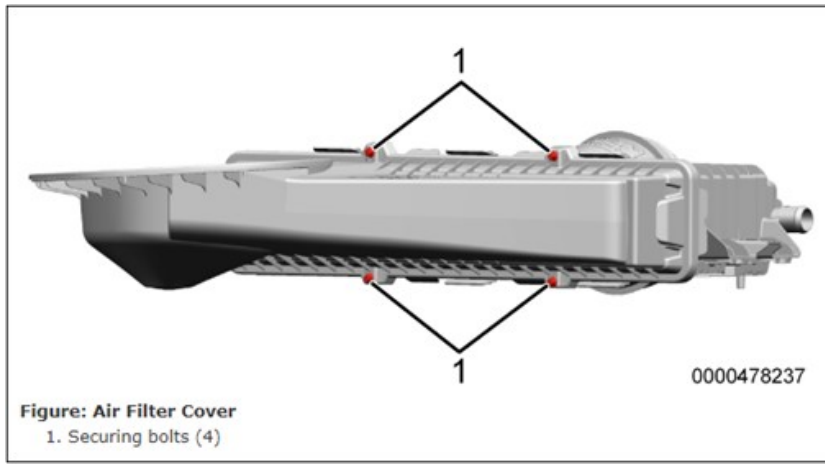

Torque spec for the four securing filter cover securing bolts to **30 +/- 0.5 lb-in (3.4 +/- 0.6 N•m)**

WARRANTY INFORMATION

Warranty Claim Coding:

Refer to the [Warranty Coding Manual](#) for Group and Noun Codes.

Standard Repair Time(s):

Refer to the [SRT Manual](#) for Repair Times

OTHER RESOURCES

[Master Service Information Site](#)

Hide Details

Feedback Information

Viewed: 24
Helpful: 0
Not Helpful: 0

No Feedback Found