

HYUNDAI
Technical Service Bulletin

GROUP BODY	NUMBER 24-BD-009H
DATE DECEMBER 2024	MODEL(S) IONIQ 5 (NE1)

SUBJECT: SPOILER MOLDING REPLACEMENT

Description: Certain IONIQ 5 (NE1) vehicles may exhibit lifting/separation on the spoiler molding(s) by the Center High Mount Stop Lamp (CHMSL). This bulletin provides instructions to replace the molding(s) on the spoiler.



Applicable Vehicles (Certain):

- 2022–2023MY IONIQ 5 (NE1) produced from 6/8/2021 – 8/10/2022

NOTICE

To avoid any potential damage to IONIQ vehicles, IONIQ repairs can only be performed at IONIQ certified dealers.

Parts Information:

Model	Part Name	Part Number	Figure
IONIQ 5 (NE1)	Side Cover Kit RR Spoiler (LH)	87227-GI100FFF	
	Side Cover Kit RR Spoiler (RH)	87228-GI100FFF	

Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair

Warranty Information:

Model	Op. Code	Operation	Op. Time	Causal Part	Nature Code	Cause Code
IONIQ 5 (NE1)	87227F01	Spoiler Side Molding Replacement (One Side)	0.7 M/H	87210-GI000	B1C	ZZ7
	87227F02	Spoiler Side Molding Replacement (Both Sides)	0.9 M/H			

NOTE 1: Normal warranty applies.

NOTE 2: Submit claim on Claim Entry Screen as “Warranty” type.

NOTE 3: Take a picture of the warrantable defect. Op times include VIN, Mileage, and Repair validation photo(s) as outlined in the Digital Documentation Policy.

NOTE 4: The incident parts are subject to callback through the normal Warranty Technical Center (WTC) parts return process. **Claim is subject to debit if the part is not returned.**

NOTE 5: If a part is found in need of replacement while performing this TSB and the affected part is still under warranty, submit a separate claim using the same repair order. If the affected part is out of warranty, submit a Prior Approval request for goodwill consideration prior to performing the work.

STUI



This TSB includes Repair validation photos. Refer to the latest Warranty Digital Documentation Policy for requirements.

Service Procedure:

1.

STUI



Using STUI, take a photo of the lifting/separation on the spoiler with the last 6 digits of the VIN and the date of repair on a piece of paper.


Upload the photo to STUI.



- Remove the spoiler assembly (A).

Refer to the shop manual:

Body (Interior and Exterior) > Body Side Molding > Rear Spoiler > Replacement

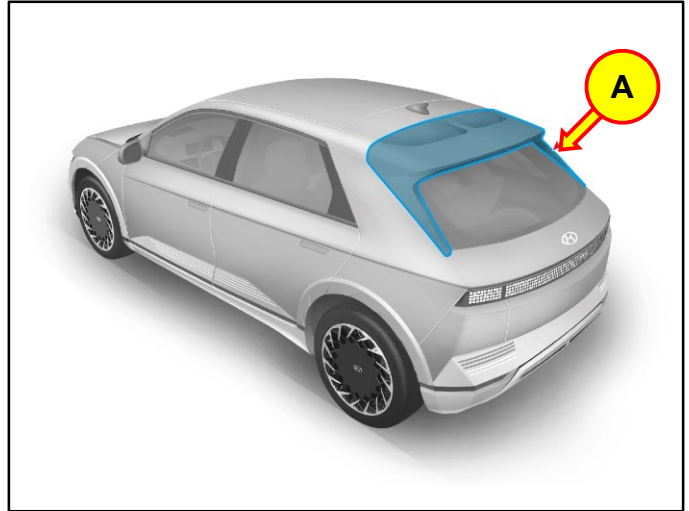


- Remove half of the indicated foam pad (B) on the underside of the spoiler assembly.




Information



Do **NOT** completely remove the foam pad. It will be reused on the new molding.

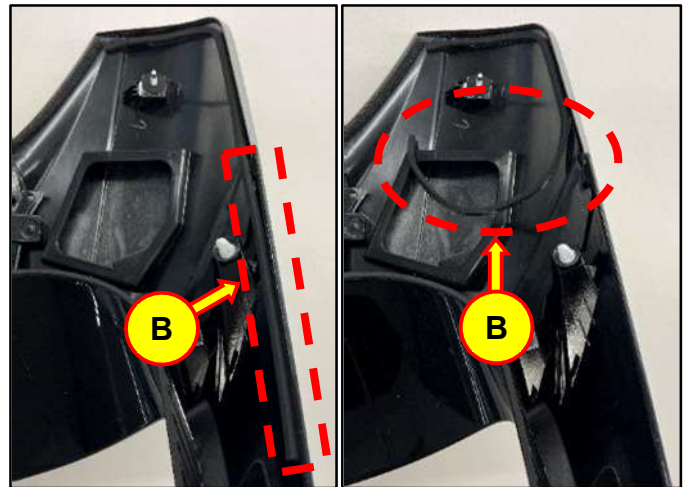


- Remove 4 spoiler molding screws (C).

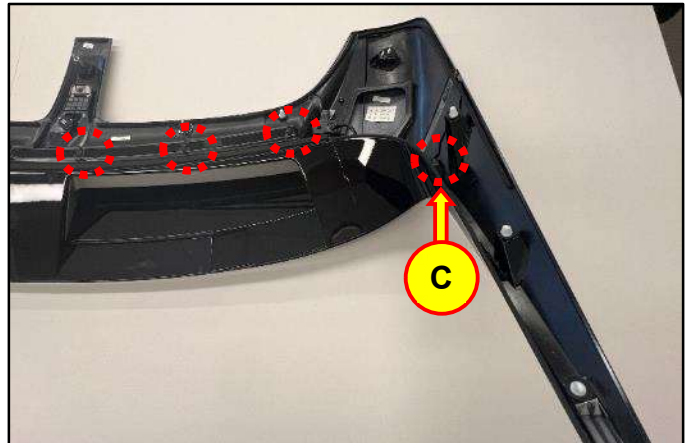

5. Lift the inner molding (D) upwards to gain access to remove the additional 2 screws (E).

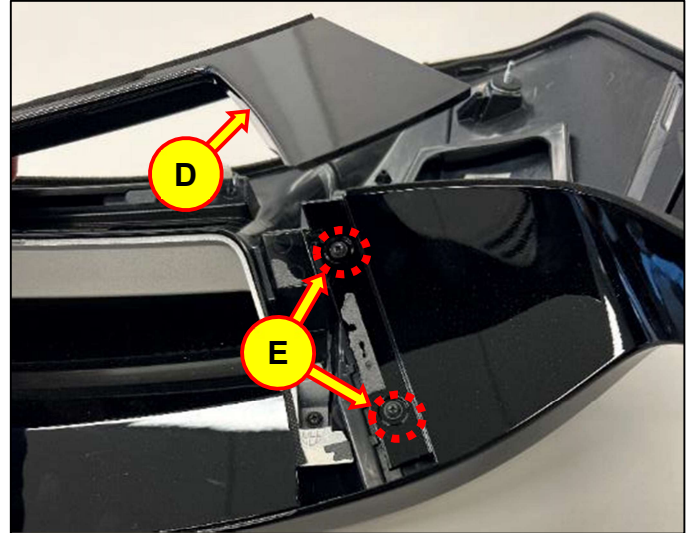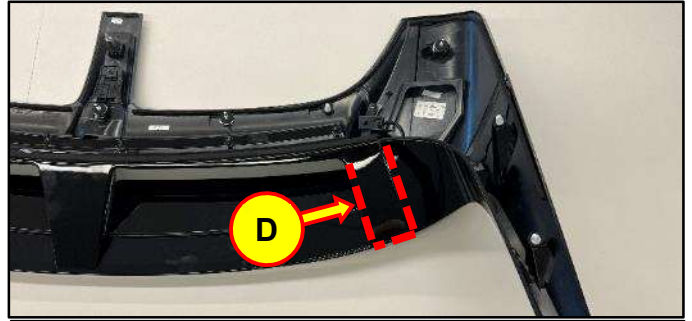

6. Remove the spoiler molding (F).

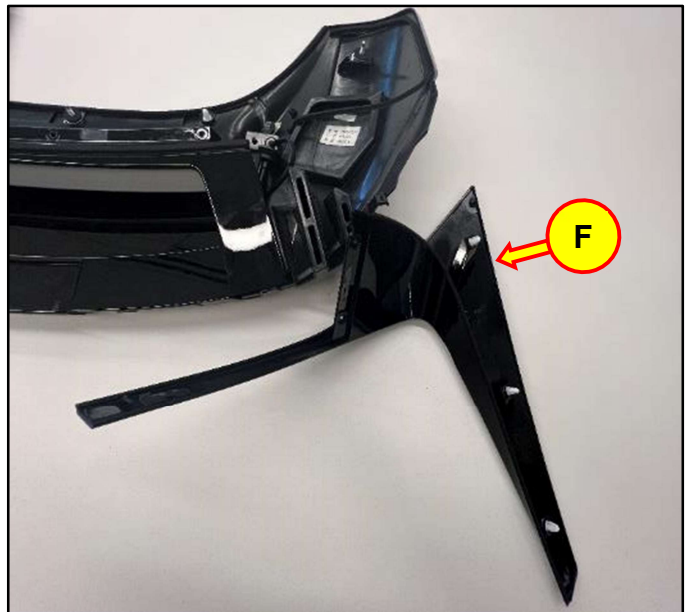

- Remove any old adhesive and/or debris from the highlighted areas (G) of the spoiler where the new molding will adhere to.



- Install the new spoiler molding.


Reinstall all parts in reverse order of the removal process.



Information

Reattach the existing foam pad (B) from step 2 to the new spoiler molding.

If the foam pad cannot be reused because it does not adhere anymore, replace it with a new foam pad of similar thickness and width.

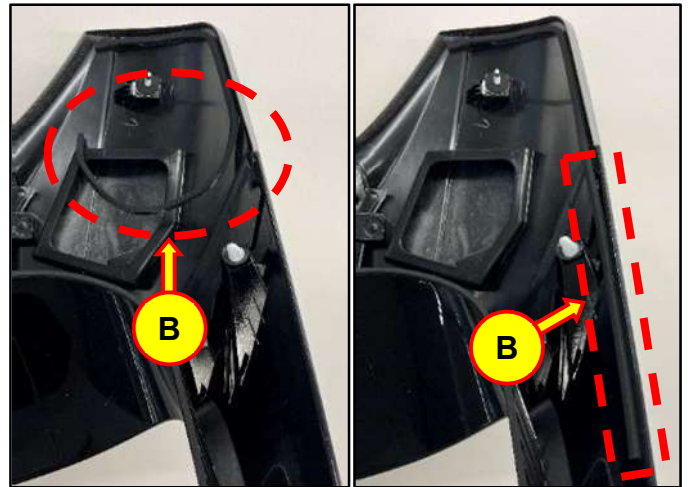

- Repeat steps 2-8 on the spoiler molding on the opposite side if necessary.
- This service procedure is now complete.