

WORK DESCRIPTION FOR FIELD MEASURE

Code: 24P3390029

Version: 2.0

Replace front axle stabilizer

Model 214

Work procedure

1. Replace stabilizer (1, figure 1) of front axle and the 4 screws (2, figure 1).



For basic information, see:

AR32.35-P-2200WT (model 214 **except** code M005) or

AR32.35-P-2200WTA (model 214 and 254 **with** code M005).

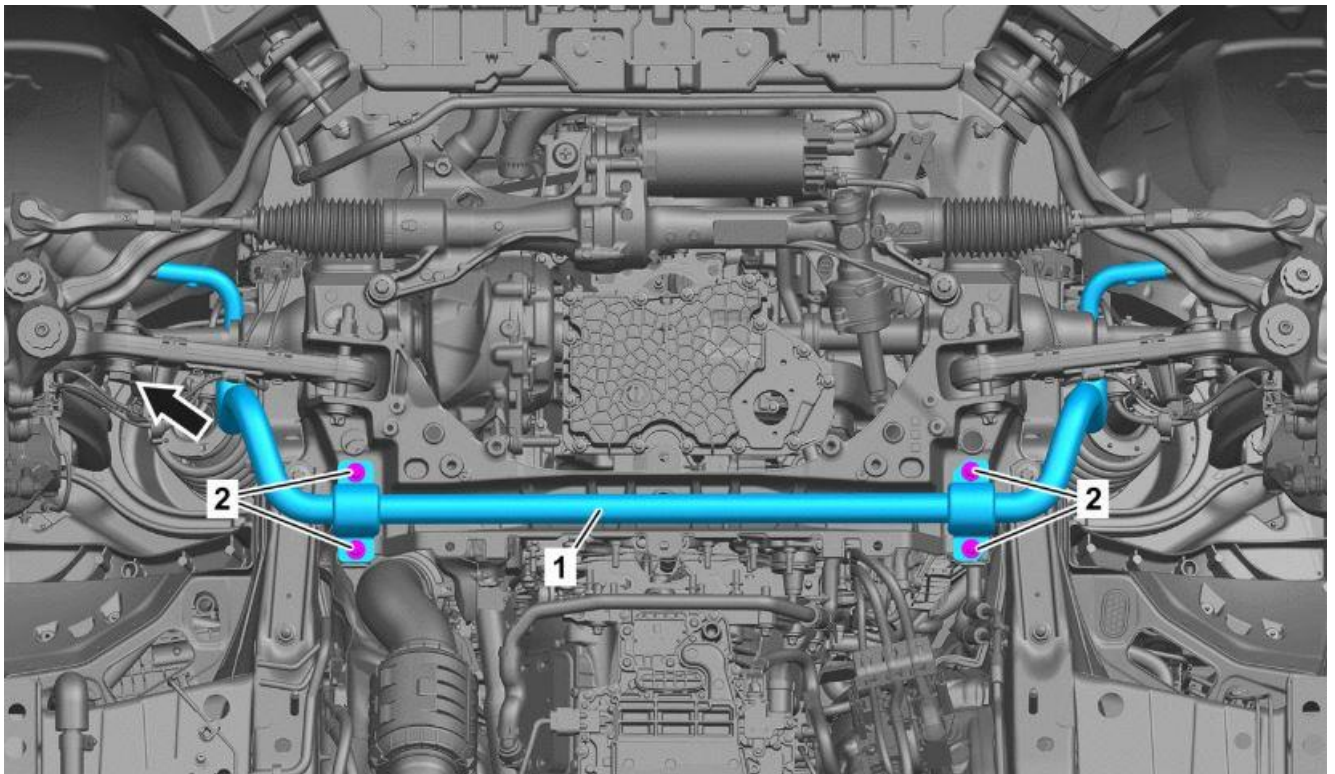


Figure 1

Parts

Quantity	Designation	Part no.
1	Front axle torsion bar	A2063232200
4	Screw, torsion bar to integral carrier	*

*The parts must be determined according to the equipment variant for the chassis number via the parts process in XENTRY Portal



Small parts such as screws, lock nuts, sealing rings, cable ties, fluids, sealant, etc. are not listed in the parts list. The required small parts are taken into account in the budgeting.

Operation text and flat rate

Operation no.	Operation text	Flat rate	Accounting no./ damage code
12 2266	Operations: Replace front axle stabilizer Model 214.205/265 Scope: Lower engine compartment lining	1.0 h	33 900 29