

Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor

Service Category Service

Section Function Group 233

Technician Skill Level A

Market North America

Applicability

Mack

Years	Models
2024, 2025	AN, TE, PI, GR, LR

Introduction

Mack Trucks has determined that a select group of trucks were built with an AHI Module fuel pressure sensor which does not meet our specifications. A sensor that falls outside of specifications may result in diagnostic trouble codes (DTCs) and improper operation of the aftertreatment system. Please follow the instruction in this document to install an updated AHI fuel pressure sensor.

Production Change Information

This bulletin applies to vehicles built within the specified production changes below.

Brand	Engine	Emission Level	Starting Build Date	Ending Build Date
Mack	MP7, MP8	EM-USA21	5-December-2023	30-April-2024

Warranty Information

This repair is covered by an authorized Service Program. Reimbursement is obtained through the normal claim handling process.		
Claim Type (used only when uploading from the Dealer Bus. Sys.)		B
Main Labor Code	Description	Hours
2339-03-02-05	Fuel Pressure Sensor Replacement	Time will vary by VIN. Refer to Impact for SRT amount.
Causal Part	22899626	
SCC Authorization Code	S4342	
Expiration Date	February 28, 2026	


Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor

Parts Information


Part Numbers	Part Names	Quantity
22899626	Pressure Sensor	1

Repair Procedure

1. Park the vehicle on level surface.
2. Apply parking brake.
3. Place the transmission in park or neutral.
4. Turn off ignition.
5. Install wheel chocks.

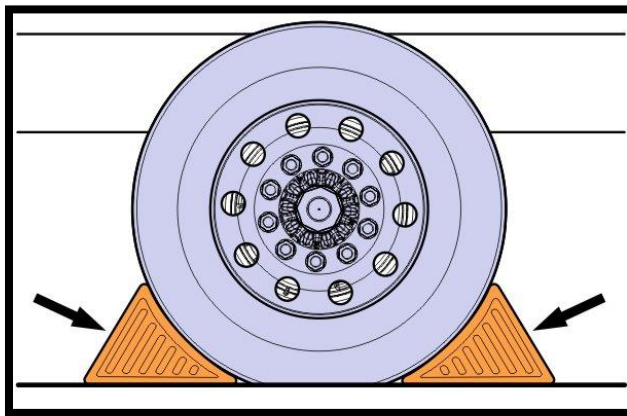


6. Disconnect the cable from the negative terminal.

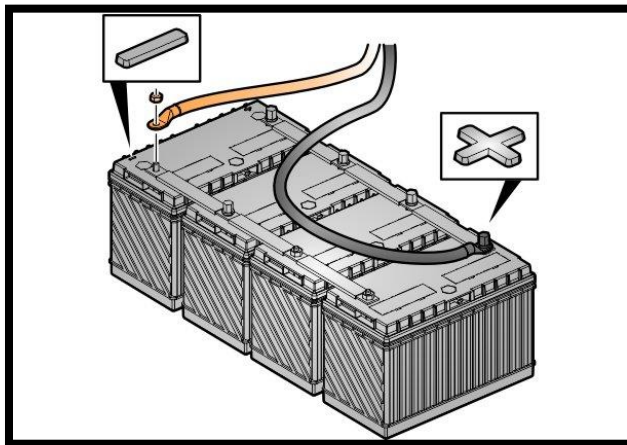


Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor

7. Unlatch and raise the hood.
8. Disconnect the fuel pressure sensor connector.
9. Move aside the harness.

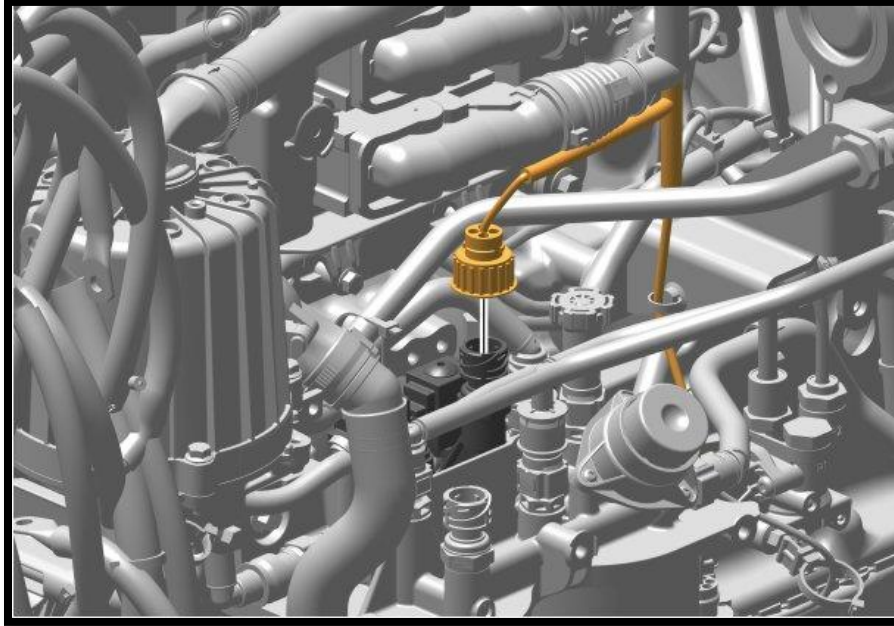

10. Clean the area around the sensor to prevent debris from entering the system.
11. Remove the sensor.
12. Remove the O-ring.

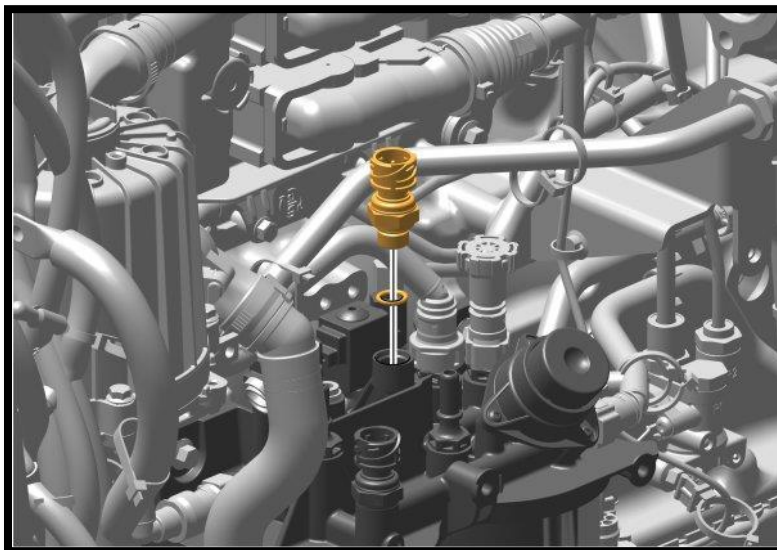


Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor


13. Install the new sensor.

14. Torque the sensor.

Tightening torque	
AHI (Aftertreatment Hydrocarbon Injector) pressure sensor	25 ±3 Nm (18 ±2 lb _f -ft)

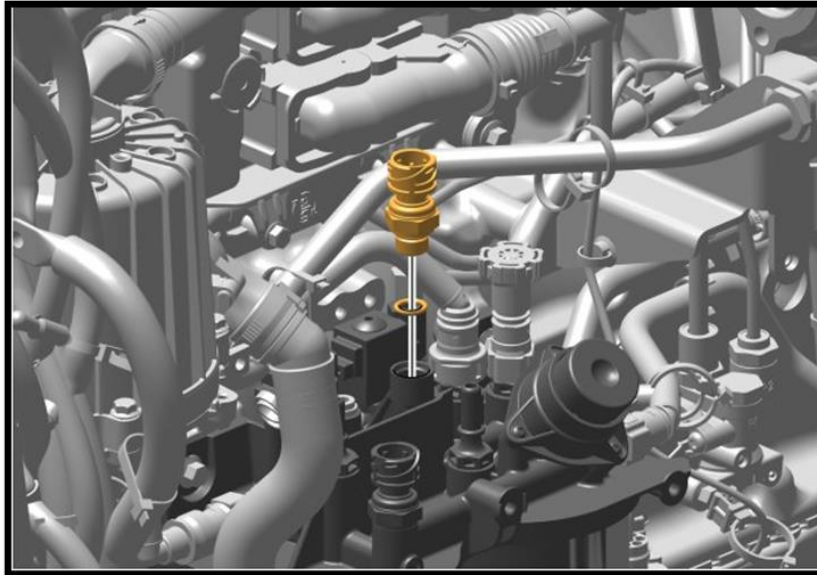


15. Connect the connector.

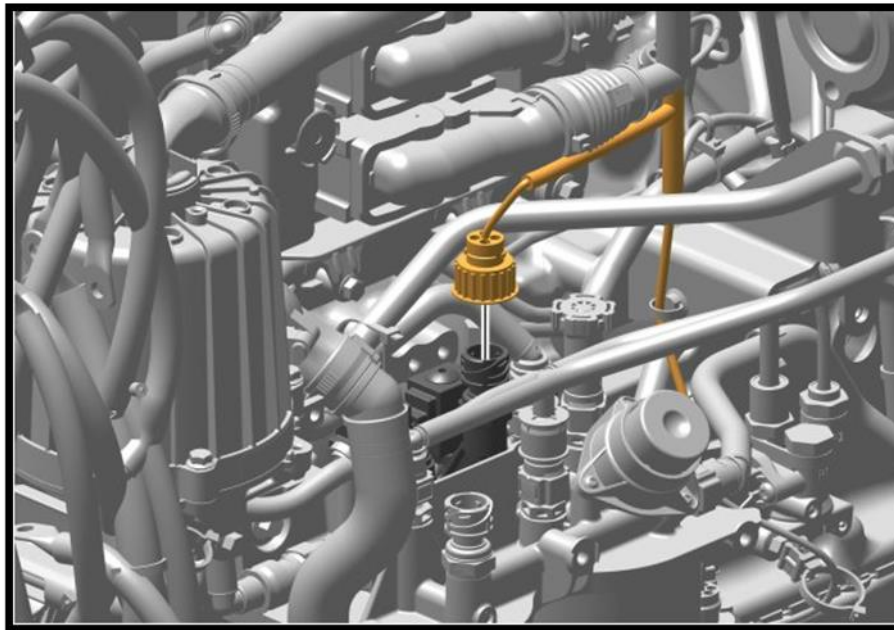

Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor

16. Connect the cable to the negative terminal.

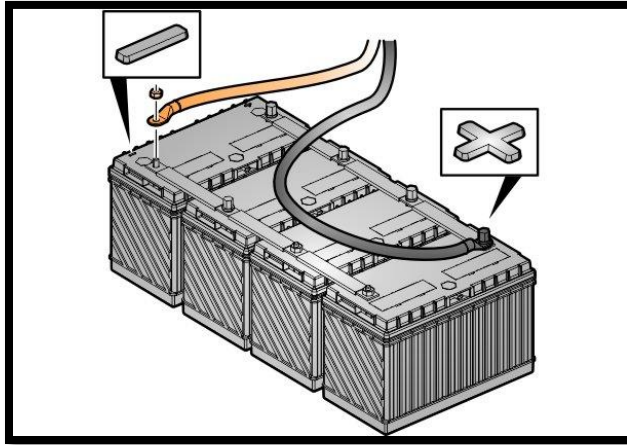


17. Start engine.

18. Check for leakage.

19. Stop engine.

20. Lower and latch hood.

21. Connect to the latest version of PTT.

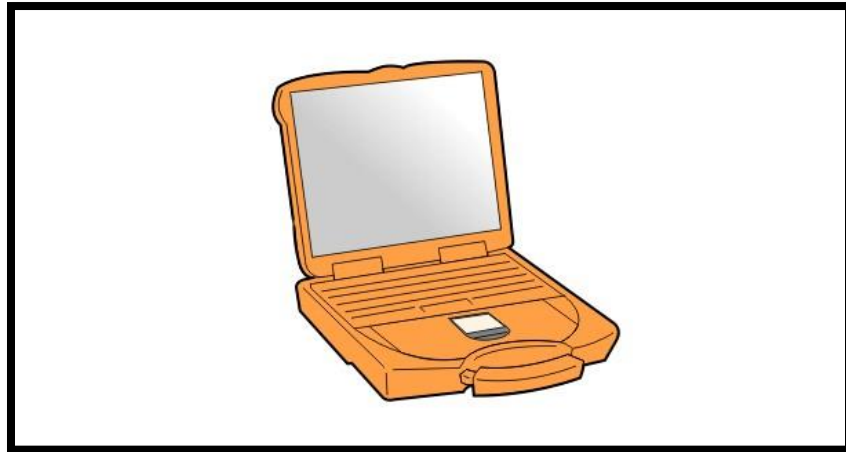


22. Clear any DTCs related to this repair.

23. Disconnect from PTT.

Aftertreatment Hydrocarbon Injector (AHI) Module Fuel Pressure Sensor

24. Remove wheel Chocks.

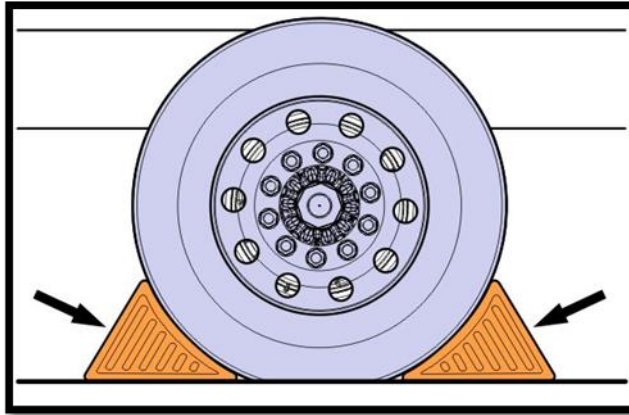

25. Release truck.