

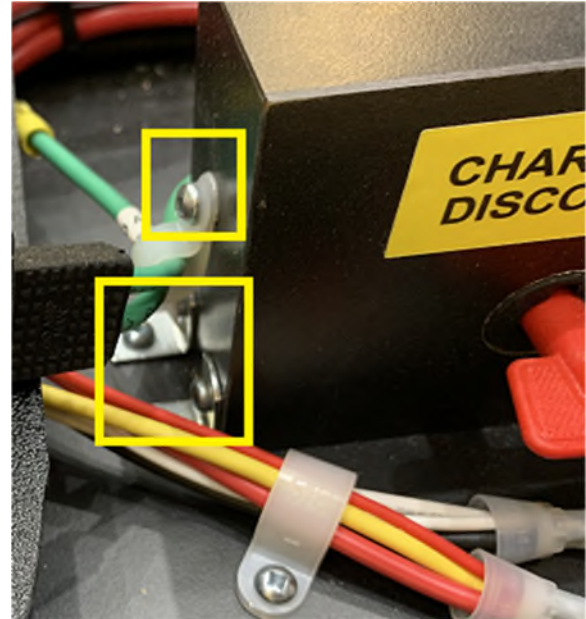
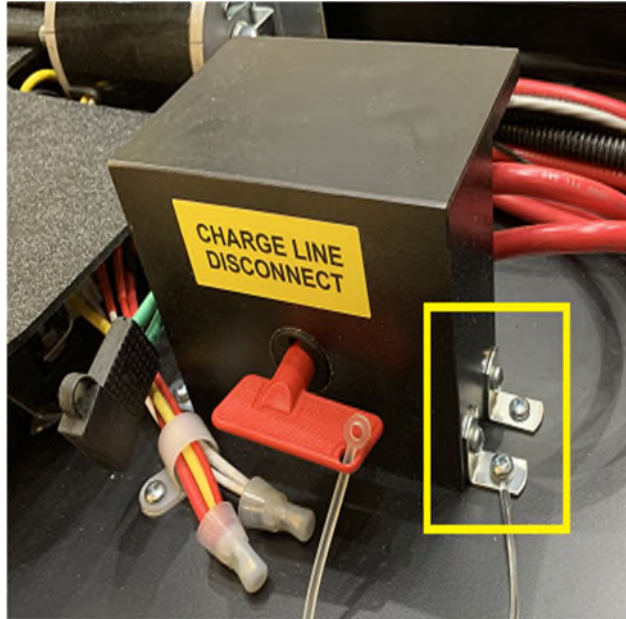


## CHARGE LINE KEY REPLACEMENT

TURN OFF THE BATTERY DISCONNECT SWITCH AND REMOVE THE RED CHARGE LINE KEY. THEN REMOVE THE L BRACKETS SECURING THE FRAME TO THE TOP OF THE BATTERY BOX. ALSO REMOVE THE SCREW THAT SECURES THE SOLAR PANEL FUSE.

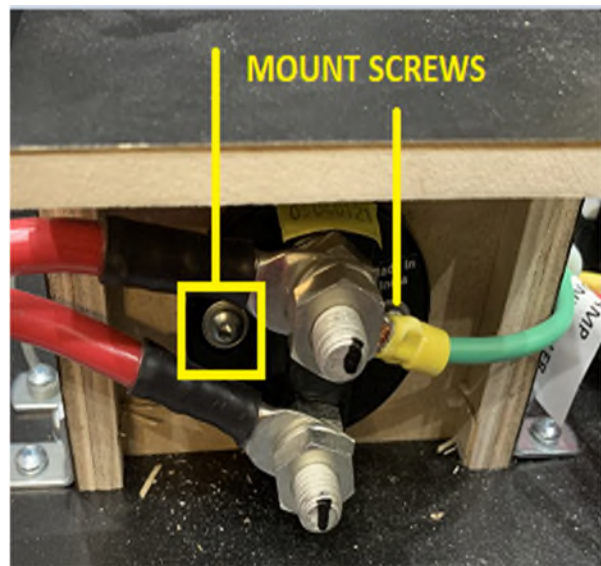

THEN WITH THE BOX PULLED FORWARD, ACCESS THE REAR OF THE DISCONNECT BOX AND REMOVE THE WIRES CONNECTED TO THE INPUT AND OUTPUT POSTS OF THE KEY. KEEP IN MIND WHICH WIRES WENT TO WHICH POSTS FOR WHEN YOU REINSTALL THEM ONTO THE NEW KEY.

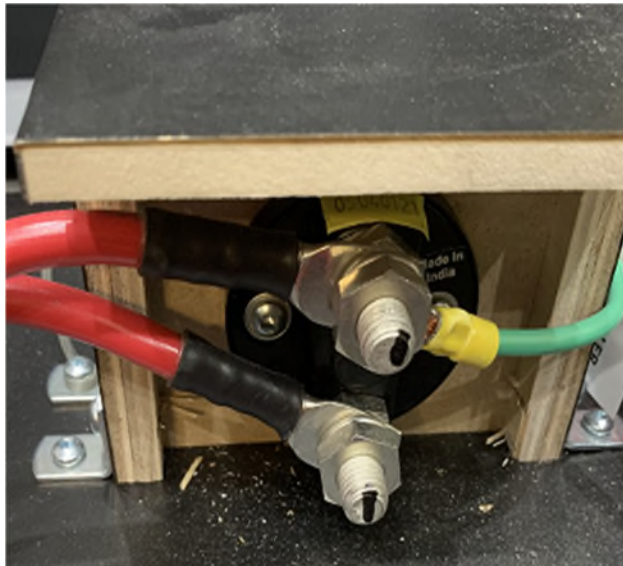

LASTLY, REMOVE THE 2 SCREWS THAT SECURE THE CHARGE LINE DISCONNECT KEY TO THE BACK OF THE BOX. THEN SLIDE IN THE NEW DISCONNECT KEY IN PLACE AND SECURE, HOOK WIRES BACK TO ORIGINAL POSTS AND REMOUNT THE CHARGE LINE DISCONNECT BOX ONTO THE TOP OF THE BATTERY BOX.

By Hella Marine – Part # 002843011

