

**Date: 8/1/2025
CAL FTL 54-038**

Subject: Wiring Support Bracket Reroute

Make: Freightliner

Model: 5th Generation Cascadia

Model Year Affected: 2026

Build Date Range: Selected Vehicles Built Between June 2, 2025, and July 1, 2025

Our records indicate that you are the owner of certain vehicles; therefore, DTNA has decided to share the following documentation with you.

Please see the attached communication in this email. We hope you find this information helpful.

Date: 8/1/2025
CAL FTL 54-038

Subject: Wiring Support Bracket Reroute

Make: Freightliner
Model: 5th Generation Cascadia
Model Year Affected: 2026
Build Date Range: Selected Vehicles Built Between June 2, 2025, and July 1, 2025

General Information:

Your vehicle may have a bracket that is positioned downward. This procedure will help you position the bracket upward to ensure the proper wiring routing on the unit.

Work Instructions

1. Park the vehicle on a level surface, shut down the engine, and apply the parking brakes. Chock the tires.
2. Disconnect the negative battery cables from the batteries.
3. Locate the bracket on the frame rails near the positive auxiliary cables.
4. Position the bracket upward (a 180-degree rotation) using a diagram D66-22650-001 as reference and complete the installation according to the R&C guidelines. See Fig. 1.

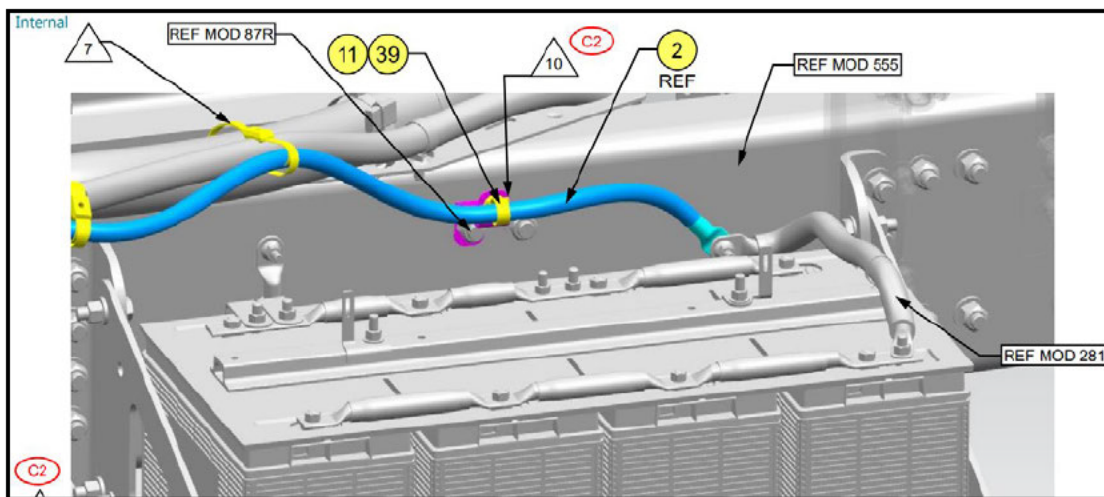


Fig. 1 Wiring Support Bracket Rerouting