

WSN5 - Rework Damper Element Screw Connection (Workshop Campaign)

Vehicle Type: **911 GT3 (992)**
911 GT3 RS (992)
911 S/T (992)

Model Year: **As of 2024 up to 2025**

Concerns: **Screw connection for damper element**

Cause: **The damper elements of the catalytic converter brackets may not have been screwed correctly on the affected vehicles.**
 This leads to increased vibrations and forces on the exhaust manifold, which can cause cracks and consequently significant noise developments in the area of the exhaust system over the vehicle's service life.

Action: Reworking screw connection for damper element.

Affected Vehicles: Only vehicles assigned to the campaign (see also PCSS Vehicle Information).

Required parts


| Parts Info: | Part No. | Designation – Location | Quantity |
|-------------|-----------------|--|-----------------|
| | PAF910423 | ⇒ Oval socket head bolt M6 x 16 – Lower part of rear spoiler (diffuser) | 5 piece(s) |

Required tools

- Tools:
- Torque wrench, 2-10 Nm (1.5-7.5 ftlb.), e.g. **V.A.G 1783 - torque wrench, 2-10 Nm (1.5-7.5 ftlb.)**
 - Torque wrench, 6-50 Nm (4.5-37 ftlb.), e.g. **V.A.G 1331A - torque wrench, 6-50 Nm (4.5-37 ftlb.)**

Reworking screw connection for damper element

- Work Procedure: 1 Remove rear spoiler, lower part (diffuser).
⇒ *Workshop Manual '665919 Removing and installing rear spoiler, lower part (diffuser)'*
- 2 Nut for damper element ⇒ *Reworking screw connection for damper element -1-* on both sides of the vehicle with **Tightening torque 26 Nm (19.2 ftlb.)**

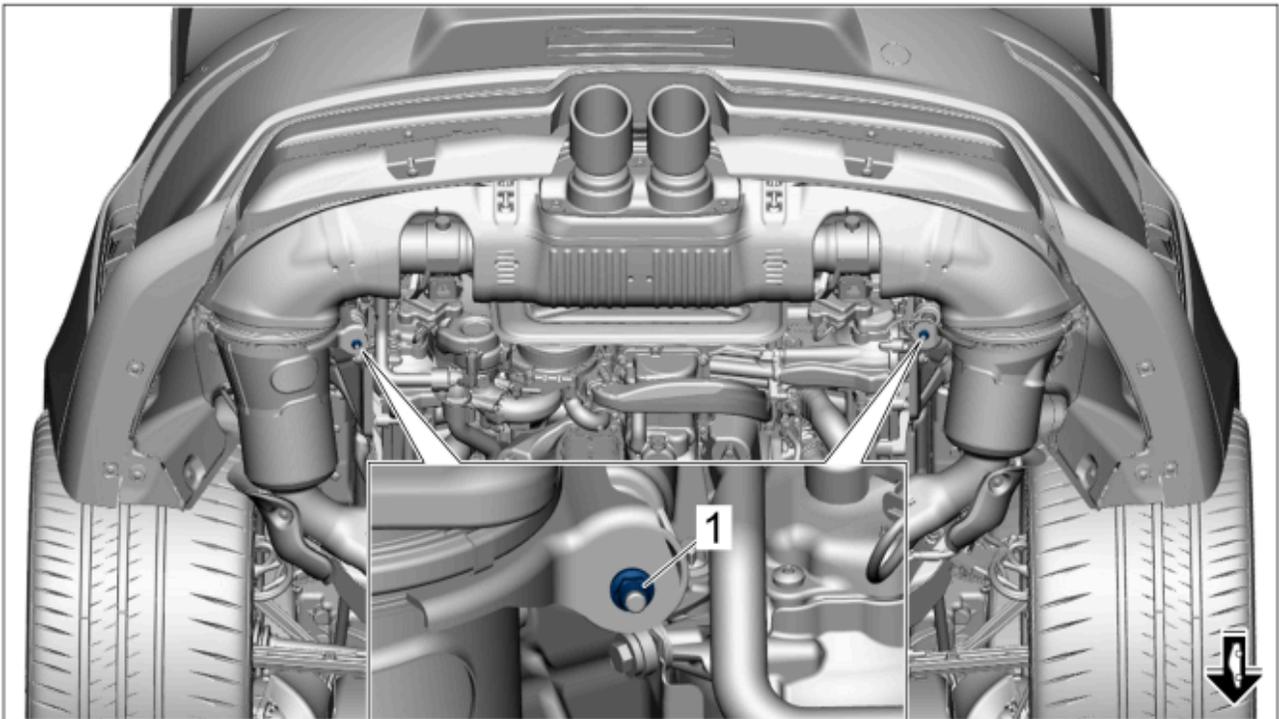

Reworking screw connection for damper element

- 3 Install rear spoiler, lower part (diffuser).
⇒ *Workshop Manual '665919 Removing and installing rear spoiler, lower part (diffuser)'*
- 4 Enter the campaign in the Warranty and Maintenance logbook.

Warranty processing



Information

The specified labor time was determined specifically for carrying out this campaign and includes all necessary preliminary and subsequent rework. The labor time can differ from the labor time published in the Labor Operation List in the PCSS.

Scope 1: **Reworking screw connection for damper element**

| | | |
|---|-------------------------------|--------------------------|
| Labor time: | | |
| Reworking screw connection for damper element | | Labor time: 31 TU |
| Includes: Removing and installing rear spoiler, lower part (diffuser) | | |
| Required parts: | | |
| Part No. | Designation | Quantity |
| PAF910423 | Oval socket head bolt M6 x 16 | 5 piece(s) |
| ⇒ Damage code WSN5 066 000 1 | | |

Important Notice: Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. Part numbers listed in these bulletins are for reference only. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© 2025 Porsche Cars North America, Inc.