

## DOORS

**Purpose**

This document outlines the procedure for replacing door latch/handle assemblies.

**Resources Required**

- Work cloth
- Utility/putty knife or plastic scraper
- Cordless or electric drill or screw gun
- Appropriate drive bits
- Appropriate drill bits

**Procedure**Removing Existing Latch/Handle


1. Make sure unit is parked and secured.
2. Consult existing door lock instructions for removal tips.

**NOTE:** During removal, make sure the existing lock is unlocked so the deadbolt and lockset do not cause unnecessary stress or damage to the door during the procedure.

3. Clean the cut-out area of all dirt, loose material, burrs, etc.

Installing New Latch/Handle

1. Insert the door handle assembly into the door from the outside (Fig. 1).

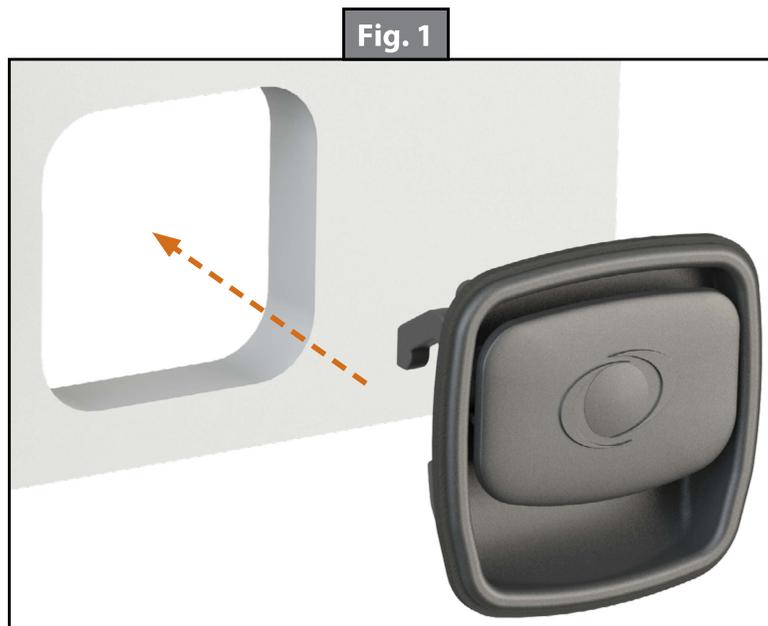


## DOORS

- Using the provided screws (Fig. 2A), secure the latch assembly (Fig. 2B) to the handle assembly (Fig. 2C) from inside the door.

### ⚠ CAUTION

**Do not overtighten screws. Overtightening screws may cause damage to the door.**

**NOTE:** When installing the latch assembly, make sure not to depress the latch bolt (Fig. 2D).

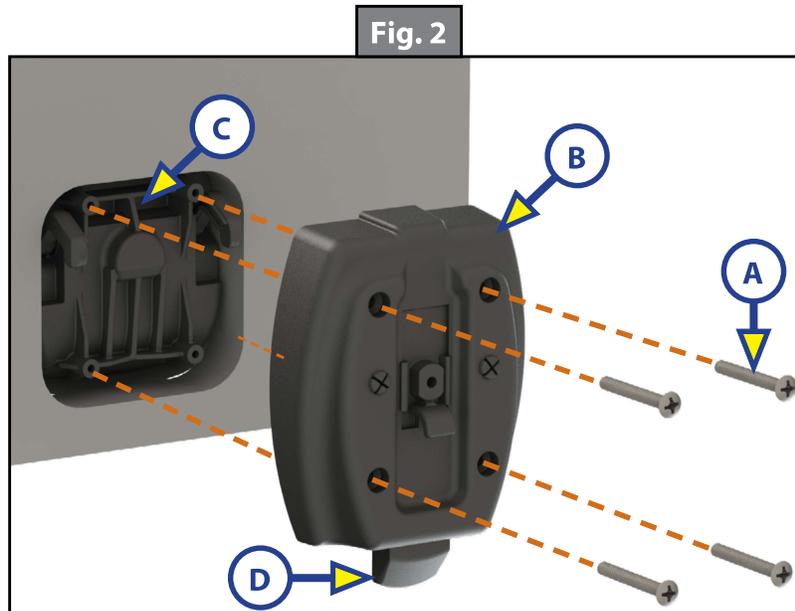

**NOTE:** When installing the latch assembly, ensure that the gasket on the handle assembly (Fig. 3A) stays flat against the door.

