

Revisions to this document are noted by a stripe in the left-hand margin

IS 297, Rev. B
 P/N (None)
 January 12, 2026
 Page 1 of 8

SUBJECT: Oil Sampling Procedure and Fluid Analysis

OIL SAMPLING PROCEDURE

Installation of Quick Draw Valve

The most uniform samples are obtained when the transmission is in Neutral, idle speed, and at operating temperature. To collect a sample under these conditions, POLARIS Laboratories™ offers a sampling valve that can be installed in an oil gallery with constantly circulating fluid. Contact POLARIS Laboratories to determine which Push Button Sampling Valve is most appropriate for the specific transmission series.

POLARIS Laboratories
 7451 Winton Drive
 PO Box 68983
 Indianapolis, IN 46268
 TOLL FREE: (877) 808-3750
custserv@polarislabs.com

The Push Button Sampling Valve is shown in [Figure 1](#). For on-highway transmissions, refer to [Figure 2](#), [Figure 3](#), or [Figure 4](#) for recommended placement of the Push Button Sampling Valve.

Refer to [Table 1](#) for Push Button Sampling Valve torque values. An optional remote provision for the Push Button Sampling Valve is depicted in [Figure 5](#).



NOTE: It may be necessary to tap into the cooler line fittings to provide accessibility.

Table 1 Push Button Sampling Valve Torque Values

Model	Torque Values
1000 Series™, 2000 Series™, 3000 Series™, and 4000 Series™	10-13 N·m (7-10 lb ft)
5000 Series™, 6000 Series™, 8000 Series™, 9000 Series™, and FracTran®	
NPT	5.4-6.8 N·m (4-5 lb ft)
Straight-Thread	10-13 N·m (7-10 lb ft)



CAUTION: Vehicle operating environment must be considered if permanent installation of Push Button Sampling Valve or remote oil sample hose is desired. Vehicles that operate off-road or have low ground clearance pose a greater risk of road/debris impact to the Push Button Sampling Valve and subsequent transmission damage.

Fluid Sampling

Proper fluid sampling consists of the following procedure:

- The first sample data point must be from an unused, new fluid sample to establish initial levels for which subsequent used oil samples will be compared.
- Second sample data points of used oil samples should be taken per recommendations in [Table 4](#).
- Subsequent sample data points of used oil samples should be taken per recommendations in [Table 5](#). Subsequent draw of used oil samples will continue until the fluid exceeds any of the limits contained in [Table 2](#) and [Table 3](#).

Once a fluid/filter change is performed, the next sample data point should occur per the recommendations in [Table 4](#). Subsequent sample data points should again be taken per the recommendations in [Table 5](#) until the fluid exceeds any of the limits contained in [Table 2](#) and [Table 3](#).

Extraction of Fluid Sample

To obtain a representative fluid sample, the following conditions must exist at the time the fluid sample is taken:

1. Transmission sump temperature above 60°C (140°F) (If transmission temperature is not available, engine must be at operating temperature).
2. Engine at idle, transmission in Neutral.
3. Vehicle wheels chocked and vehicle brakes applied.

Before attaching collection bottle, push the button on end of Push Button Sampling Valve to allow a **minimum of 90 mL (3 fl oz)** to purge into a container. This removes prior oil/debris trapped in Push Button Sampling Valve and/or remote oil sample hose. Once Push Button Sampling Valve and/or remote oil sample hose has been purged, position collection bottle under the Push Button Sampling Valve output port and fill collection bottle approximately 3/4 full or to the FILL LINE marked on the sample collection bottle.

Submission of Oil Sample:

To register the sample, go to (<https://www.eoilreports.com/login>) or download the Horizon Fluid Analysis Results App from Google Play or Apple App Store on a mobile device and login to HORIZON. If you do not have a login, follow the steps on the login screen to create a new account. Follow the steps for submitting by selecting your account number, component ID and enter all relevant information into the form. Fill out the sample label, attach label to the bottle, package carefully using materials supplied in the kit and send it immediately.

If there is no access to Internet or a device to submit on-line, follow the steps below to submit and enter the information manually.

Fill out the label completely with the transmission serial number, hour meter/mileage reading, sample date, and hours/miles accumulated on the oil. Indicate whether or not the oil was changed after the sample was taken. Attach the label to the bottle, package carefully using materials supplied by the lab and send it immediately.

Presence of glycol contamination is analyzed. Cost of oil analysis is included in the cost of the oil analysis kit P/N 29537805.

FLUID ANALYSIS

Transmission protection and fluid change intervals can be optimized by monitoring fluid viscosity and oxidation. Fluid degradation is monitored by testing for viscosity and total acid number (TAN). Fluid oxidation limits are shown in [Table 2](#).

Table 2 Fluid Oxidation Limits

Condition	Limit
Viscosity	+/- 25% Change From New Fluid
Total Acid Number	+3.0 Change From New Fluid

Since limits are referenced from an unused oil sample, when beginning fluid analysis or repurchasing bulk oil stock, i.e. 55 gallon drum and larger, collect a new, unused oil sample and submit for analysis. Viscosity and TAN values measured from unused sample create the baseline that future used oil sample will be measured against.

Monitoring Contaminant Levels:

The presence of contaminants in the transmission fluid is detrimental and indicates a fluid change is necessary. Contaminant limits are shown in [Table 3](#).

Table 3 Contaminant Limits

Contaminant	Limit
Water	0.2% Maximum
Glycol	No Trace Allowed
Alien Fluids*	If Detected, Change Transmission Fluid

* Any fluid not meeting Allison approval. Refer to www.allisontransmission.com/aftermarket-and-channel/parts-and-service/allison-approved-fluids or the latest revision of Service Information Letter (SIL) 10-TR-99 for a listing of approved fluids.

Monitoring Wear:

Absolute maximum values are not applied to wear metals of an automatic transmission due to the many variables present that affect concentration limits. Wear metal analysis results must be evaluated using a trendline approach. A trendline approach plots the concentration level of each wear metal over a period of time. A line of best fit drawn through the plotted points is considered a trendline. A minimum of 4 data points for each wear metal is required to establish a trendline.

Concern should only occur when significant deviations in the established trendline are present. While trendline analysis on wear metals can prove informative and useful, a transmission removal decision should not be based solely upon the analysis. The results should be used in conjunction with other inspection procedures such as a functional check, road test, oil sump/internal filter inspection, or elevated particle counts. A removal based solely on wear metal analysis may result in an unnecessary teardown. Transmission removal should occur only if the additional investigation warrants it.

If there is ever any doubt on the significance of any fluid analysis reports, or a need to react to a condition, assistance should be sought through a servicing outlet or Allison Transmission regional office.

Table 4 Recommended Initial Fluid Sample Draw

Model	Vocation	TES 389®/TES 439™ Approved Fluid		TES 295®/TES 668®/TES 353™ Approved Fluid	
1000 and 2000 Series	Severe	24,000 km (15,000 miles)	600 hours	40,000 km (25,000 miles)	1000 hours
	General	40,000 km (25,000 miles)	1000 hours	80,000 km (50,000 miles)	2000 hours
3000 and 4000 Series	Severe*	8000 km (5000 miles)	200 hours	(40,000 km (25,000 miles))	1000 hours
	General**	24,000 km (15,000 miles)	600 hours	80,000 km (50,000 miles)	2000 hours
5000, 6000, 8000, and 9000 Series and FracTran			250 hours		250 hours


* Severe Vocation: All Retarders, On/Off Highway, Refuse, Transit, and Intercity Coach with duty cycle greater than one (1) stop per mile.
 ** General Vocation: Intercity Coach with duty cycle less than or equal to one (1) stop per mile and all other vocations.

Table 5 Recommended Subsequent Fluid Sample Rates

Model	TES 389/TES 439 Approved Fluid	TES 295/TES 668/TES 353 Approved Fluid
1000 and 2000 Series	250 hours	500 hours
3000 and 4000 Series	8000 km (5000 miles)	16,000 km (10,000 miles)
5000, 6000, 8000, and 9000 Series and FracTran	250 hours	250 hours




NOTE: Fluid sample frequency may need to be modified due to analysis results. For example, if analysis indicates fluid viscosity has changed by 25 percent, customer should sample at a greater frequency than recommended in [Table 5](#). Local conditions, severity of operation or duty cycle may require more or less frequent fluid sample intervals that differ from the published recommended fluid sample intervals of Allison Transmission.

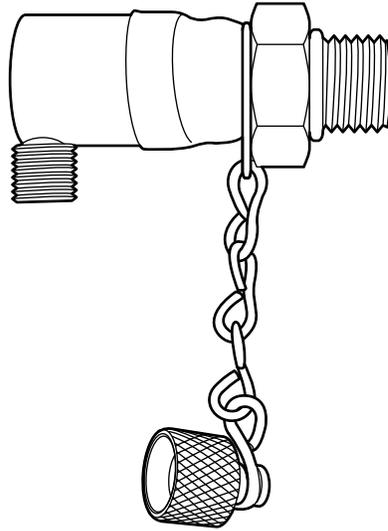

7001219

Figure 1. Push Button Sampling Valve

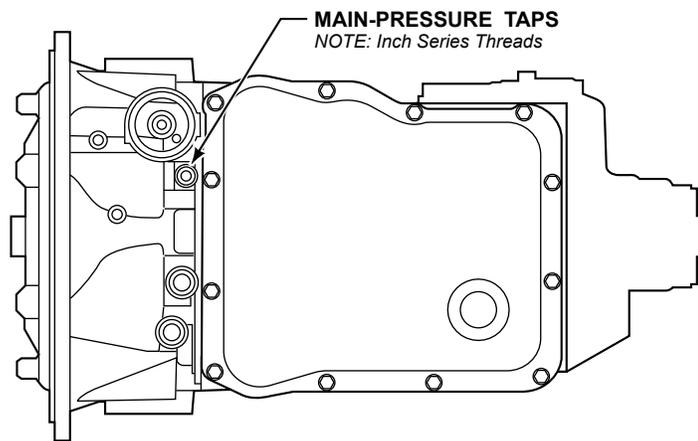


7001220


Figure 2. 1000 and 2000 Series

3000 SERIES™


4000 SERIES™

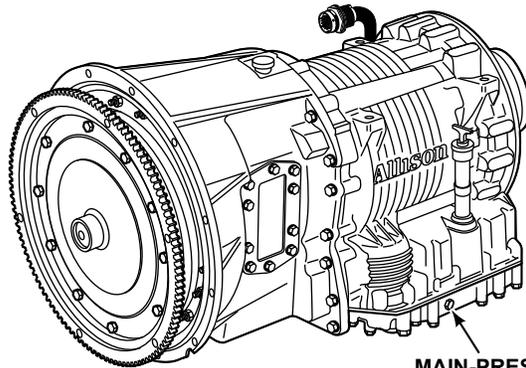

MAIN-PRESSURE TAP
NOTE: Inch Series Threads

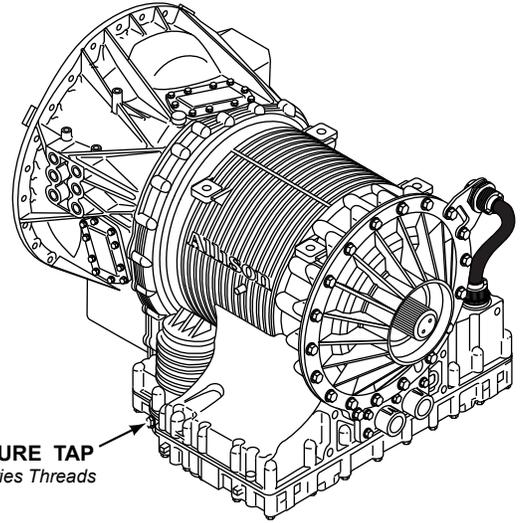


MAIN-PRESSURE TAP
NOTE: Inch Series Threads

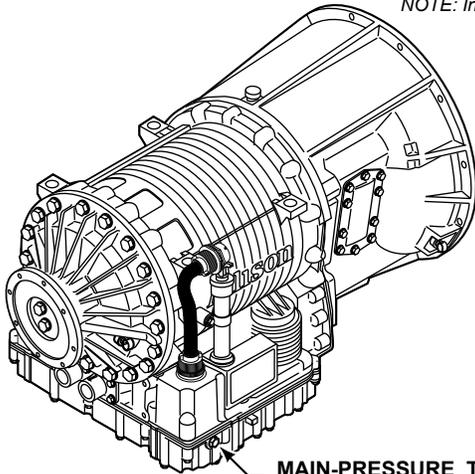

MAIN-PRESSURE TAP
NOTE: Inch Series Threads

7001221


Figure 3. 3000 and 4000 Series

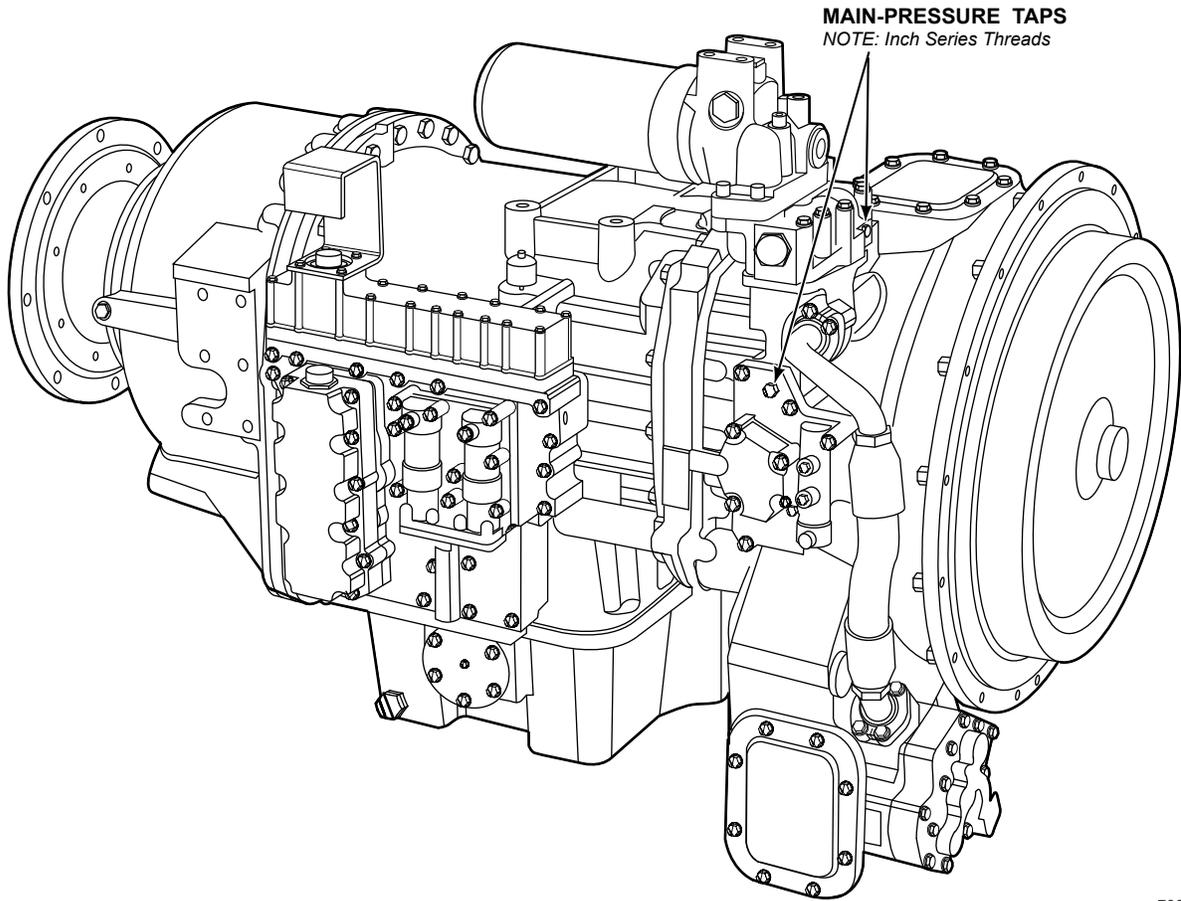

MAIN-PRESSURE TAPS
NOTE: Inch Series Threads

Figure 4. 5000, 6000, 8000, and 9000 Series

7001222

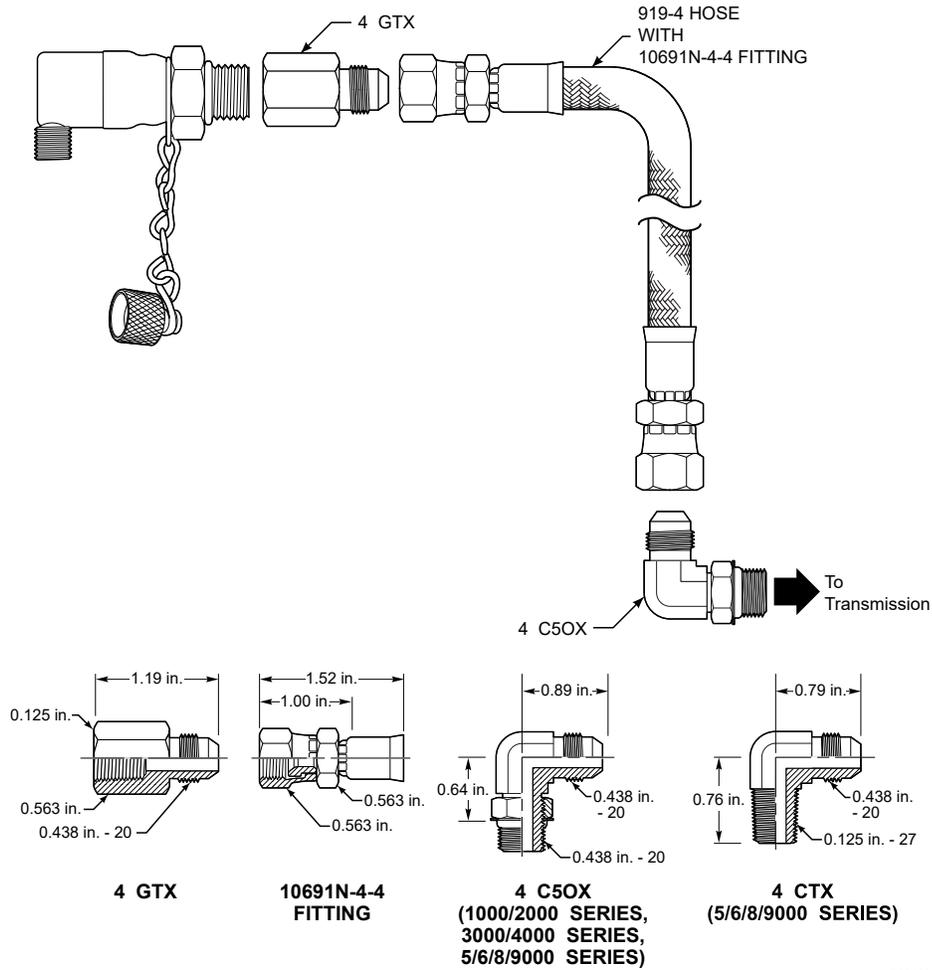

7001223

Figure 5. Optional Remote Provision

- Recommended maximum length of hose is 3 meters (10 feet).
- Hose must not contact or have potential to contact sharp or abrading surfaces.
- Hose must be routed carefully to avoid sharp bends, kinking, pinching, cutting, or rubbing.
- The hose must not be under tension between fixed points. This is especially relevant in view of the movement of the powerpack within the frame. "Tension" is considered to be any strain greater than the hose itself.
- Hose must be a minimum of 203 mm (8 in.) from radiant heat sources. Heat sources are defined as engine exhaust systems and manifolds.
- Hose should be secured every 400 mm (16 in.). Clamps must be properly sized to the OD of the hose to avoid crushing or deforming the hose.
- Torque hydraulic fittings to manufacturer's specifications.

Refer to [Figure 2](#), [Figure 3](#), or [Figure 4](#) for placement of fitting.

Refer to [Table 1](#) for adapter to transmission torque values.