

ATTENTION:
 GENERAL MANAGER
 PARTS MANAGER
 CLAIMS PERSONNEL
 SERVICE MANAGER

IMPORTANT - All Service Personnel Should Read and Initial in the boxes provided, right.

© 2022 Subaru of America, Inc. All rights reserved.



QUALITY DRIVEN® SERVICE

SERVICE INFORMATION BULLETIN

APPLICABILITY: 2023-26MY Solterra
 2026MY Trailseeker
 2026MY Uncharted

NUMBER: 01-184-22R
DATE: 06/14/22
REVISED: 04/24/26

SUBJECT: Pre-Delivery Inspection (PDI) Procedure

INTRODUCTION:

This Service Information Bulletin announces the Pre-Delivery Inspection (PDI) procedure for Solterra. Please review the information outlined below when performing a PDI on Solterra models.

SERVICE PROCEDURE / INFORMATION:

Prior to performing any service work procedure, confirm the latest version of Global Tech Stream Plus (GTS+) is available. Global Tech Stream was released with Subaru Select Monitor (SSM) Ver 29.1.1 and is a standalone program. Confirm GTS+ has the latest software available.

Vehicle Lifting:


EXTREMELY CRITICAL: Extra care and attention is required to lift the Subaru Solterra. NEVER USE THE PINCH WELDS TO RAISE THE VEHICLE AS BODY DAMAGE WILL RESULT!

NEVER leave Solterra raised in the “raised” or “lifted” position if work is not being performed. Keep the vehicle at ground level whenever possible.


- 4”-5” Diameter round or similar size square pads with height adjustment are APPROVED. Example: Rotary T100272 Round Adapter Kit for TRIO arms (**GREEN** below).
- Pads similar to Rotary #FJ6190YL and #FJ6139BK are NOT APPROVED due to spacing (**RED** below).
- Metal to metal contact is NOT APPROVED (shown in the right/center photo below).

<p>CAUTION: VEHICLE SERVICING PERFORMED BY UNTRAINED PERSONS COULD RESULT IN SERIOUS INJURY TO THOSE PERSONS OR TO OTHERS.</p>	<p>Subaru of America, Inc. is ISO 14001 Compliant</p>
<p>Subaru Service Bulletins are intended for use by professional technicians ONLY. They are written to inform those technicians of conditions that may occur in some vehicles, or to provide information that could assist in the proper servicing of the vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do the job correctly and safely. If a condition is described, DO NOT assume that this Service Bulletin applies to your vehicle, or that your vehicle will have that condition.</p>	<p>ISO 14001 is the international standard for excellence in Environmental Management Systems. Please recycle or dispose of automotive products in a manner that is friendly to our environment and in accordance with all local, state and federal laws and regulations.</p>

Continued...

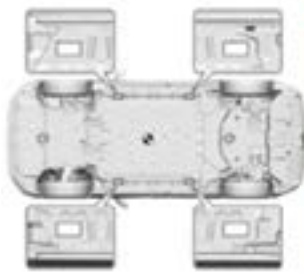

Lifting Points

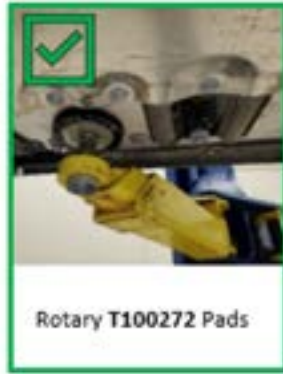

Rotary T100272 Pads





Rotary Flip Up Adapter
(**NOT APPROVED** due to metal-to-metal contact and limited height adjustment)




FJ6190YL Rotary Flip Up Adapter Pads

STEP 1: The DC Cut Fuse Installation


- The DC CUT FUSE (30A) has been removed at the assembly plant to reduce parasitic current draw during transit and is stored in the open space of the relay block within the motor compartment.
- The removed DC CUT FUSE (30A) is stored in the blank space of the relay block in the motor compartment.
- The DC CUT FUSE (30A) must be reinstalled to the original location during PDI (Pre-Delivery Inspection).

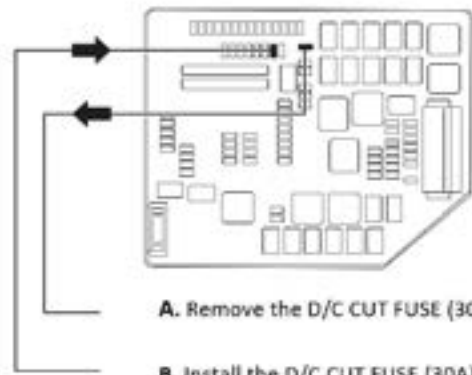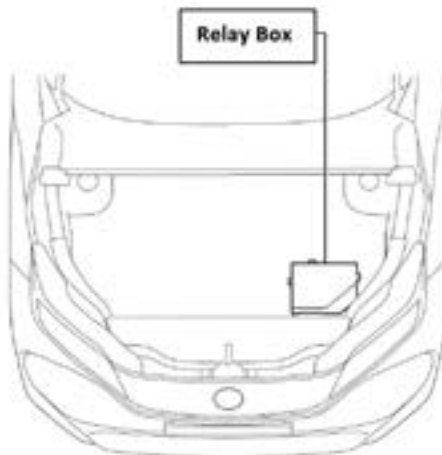

- A. Remove the D/C CUT FUSE (30A)
B. Install the D/C CUT FUSE (30A) here
(Original Location)

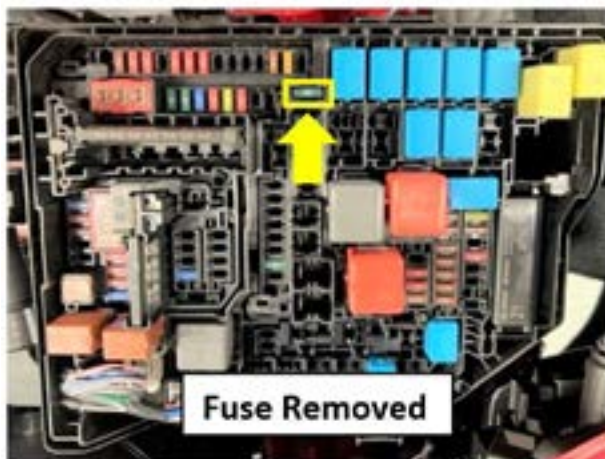

Fuse Removed

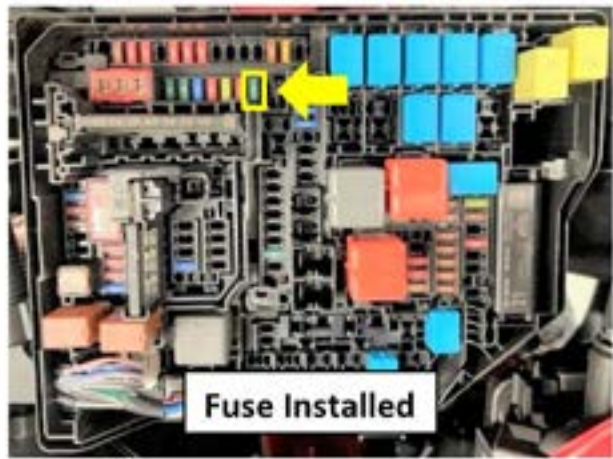


Fuse Installed

Continued...

NOTE: With the DC CUT FUSE (30A) removed, diagnostic trouble codes (DTC) can be detected when the ignition is turned on during transportation. Clear all DTCs using Global Tech Stream (GTS+) after confirming that there are no malfunctions on the vehicle.


STEP 2: Initialization of the Driver's Seat ECU (if equipped)

Initialize the seat ECU after installing the DC CUT fuses during PDI (Pre-Delivery Inspection).

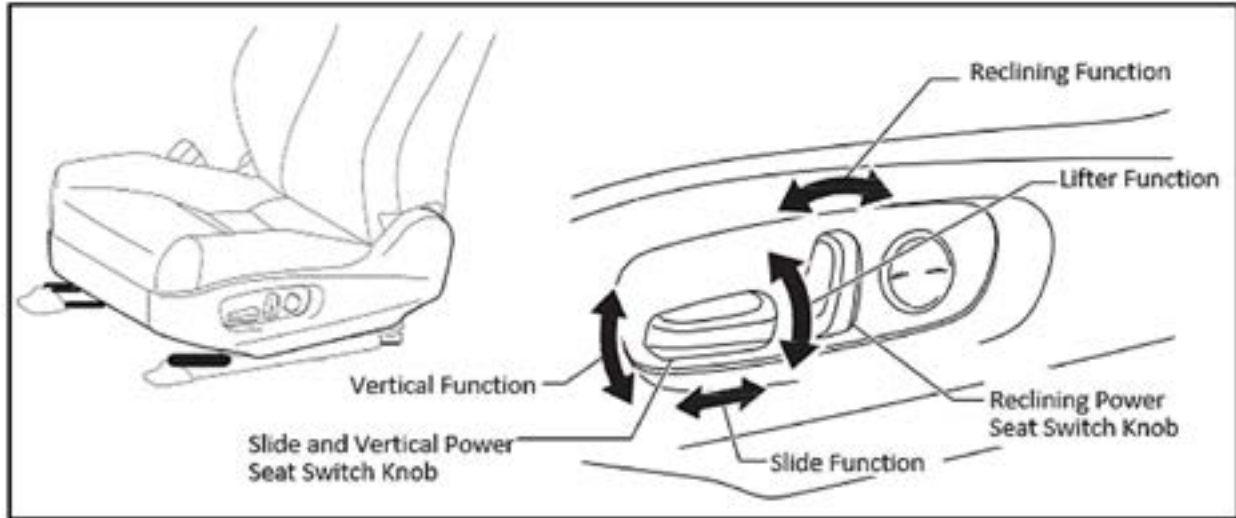

ALWAYS perform a function test of the seat memory to confirm if initialization is required

- (a) Turn the power switch to the "ON" mode.
- (b) Operate the "Slide & Vertical Power Seat Switch Knob" to tilt the front of the power seat in the downward direction three times.
- (c) Within 10 seconds of operating the "Slide & Vertical Power Seat Switch Knob", simultaneously pushing, and holding the "Reclining Power Seat Switch Knob" toward the recline direction while pushing and holding the "Slide & Vertical Power Seat Switch Knob" in the upward direction until a buzzer sound is heard.

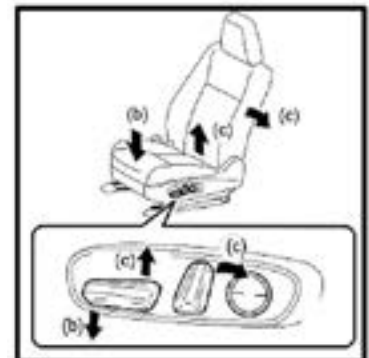

NOTE: When initializing the slide and reclining functions, be sure that the headrest does not make contact with the headliner.

- (d) Push and hold the "Slide & Vertical Power Seat Switch Knob" in the backward direction. HOLD the switch for one second after the seat has reached its furthest rear position.



Continued...

- (e) Push and hold the “Reclining Power Seat Switch Knob” to the forward position. HOLD the switch for one second after the backrest has reached its most forward position.



- (f) Push and hold the **REAR** portion of the “Slide & Vertical Power Seat Switch Knob “ to lower the seat position. HOLD the switch for one second after the seat has reached the lowest position.



- (g) Push and hold the **FRONT** portion of the “Slide & Vertical Power Seat Switch Knob” to lower the seat position. HOLD the switch for one second after the seat has reached the lowest position.



STEP 3: Power Back Door (PBD) Initialization (if equipped)

ALWAYS perform a function test of the automatic open/close function of the PBD to confirm if initialization is required. If initialization is required, please follow the procedure outlined below.

- (a) Confirm the PBD is completely closed.
- (b) Manually open the PBD to its fully open position.
- (c) Confirm the PBD function is “ON”.
- (d) Perform a function test of the PBD by opening and closing the gate using the power rear gate switch.

NOTE: The PBD can be operated via the switch when the power is OFF.

Continued...

STEP 4: Activation (Wake up) & Initialization of the Tire Pressure Warning System

The tire pressure warning valve & transmitter is built in each tire valve and the measured tire inflation pressure data is sent to the tire pressure warning ECU & receiver by radio wave. However, the radio wave is stopped at the assembly plant, because the frequency of the radio wave emitting from the tire pressure warning valve & transmitter does not comply with the Japan Wireless Telegraphy Act. Activate and initialize the tire pressure warning valve & transmitter to operate the tire pressure warning system during PDI (Pre-Delivery Inspection) at the retailer according to the procedure outlined below.

Activation (Wake up) Procedure:

- (a) Switch the power switch to the “OFF” mode and connect GTS+ to the vehicle.
- (b) Switch the power switch to the “ON” mode and confirm the tire pressure warning icon illuminates after blinking for approximately one minute.
- (c) Reduce the tire inflation pressure by 6 psi (40kPA (0.4kgf/cm²)) or more within 30 seconds. This **MUST** be performed at each tire one at a time.
- (d) Using the GTS+, verify the tire pressure transmitters have been activated.
- (e) Switch the power switch to the “OFF” mode.



NOTE: If some transmitters are not activating, attempt to repeat the process after rotating the affected tire(s) 90 to 270 degrees.

Initialization Procedure:

- (a) (Confirm the tire pressures are set to specification. The tire information can be found on the left (driver’s) B-Pillar.
- (b) Switch the power switch to the “ON” mode.
- (c) Navigate to the “Tire Pressure Setting” on the multi-information display. Once the setting is selected, press, and hold the “OK” switch located on the steering wheel until the tire pressure warning icon blinks three times.
- (d) Switch the power switch to the “OFF” mode and connect GTS+ to the vehicle.
- (e) Switch the power switch to the “ON” mode.
- (f) Navigate to the following GTS+ Monitoring items: Chassis > Tire Pressure Monitor > Data List



Continued...

- (g) Confirm the tire pressure transmitter data matched the actual values.
- (h) Disconnect the GTS+ equipment and switch the power switch to the “OFF” mode.
- (i) Remove all ID labels from each wheel.

NOTE: The initialization normally completes within a few minutes.


STEP 5: Customize the ACC function:

The pre-startup function detects when a operator enters the vehicle and energizes (+BA) the audio head unit so that multimedia system can quickly be used.

The pre-startup function is set to “OFF” at the factory to reduce excessive parasitic current draw while the vehicle is in transit and/or storage. In order to set the pre-startup function, it is necessary to set the ACC customization function to “ON”.


Customizing via the Navigation Display:

- (a) Confirm the power switch is set to the “OFF” mode unless the customer requests otherwise.
- (b) Navigate to the following menu items:
Settings > Vehicle Customization > Utility > ACC Customize
- (c) Toggle the item to “OFF”.

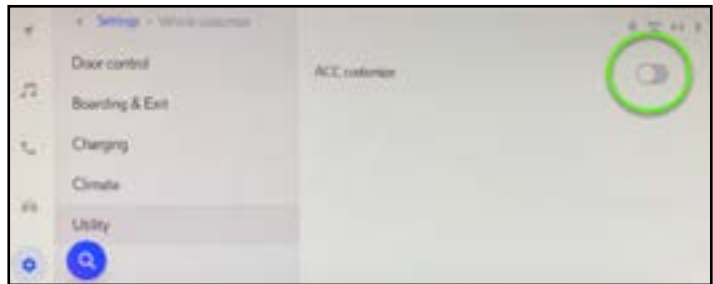

STEP 6: Charge Acceptance Verification:

- (a) Confirm the provided EV Charging Cable is equipped and properly located in the rear luggage storage area.
- (b) Perform a test charge using the provided EV Charging Cable and confirm the vehicle accepts the charge (Indicated on the Multi-Information Display).
- (c) Perform a test charge using a **Level 2 (240-Volt) Charger** and confirm the vehicle accepts the charge (Indicated on the Multi-Information Display).

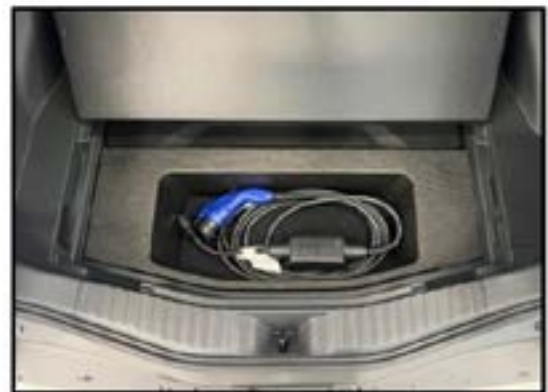

Continued...

STEP 7: Install the rear license plate using the following recommended type of hardware.

Stainless Steel or Nylon M6 x1 x 20mm

STEP 8: For 26MY~ ONLY. For all other years, skip to Step 9. Front License Plate Mounting Bracket Installation (when required):

Note: The 23–25MY Front License Plate Mounting brackets are different from the 26MY bracket and cannot be interchanged.

a) Temporarily install the license plate base on the vehicle using the two self-tapping screws.

Note: Do not fully tighten the self-tapping screws, as overtightening may damage the resin boss. Perform temporary tightening at a torque of 2.5 N·m or less.




b) Scribe a circle on the front bumper where the plate-to-base hardware is located and remove the base from the bumper.



Continued...

c) Drill 20 mm holes at the center of the scribed marks and proceed to Step 9.

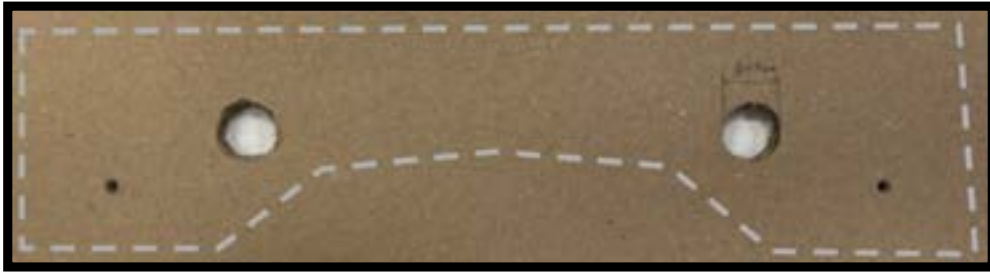

STEP 9: Front License Plate Mounting Bracket Installation (when required):

The front license plate bracket and two self-tapping screws are installed in the rear luggage storage area during assembly. The procedure below outlines the installation process for the front license plate bracket.



- a) Locate the dimples located on the front bumper assembly (circled in the image below). These dimples will align with the mounting holes on the front license plate bracket.



- b) Align the dimples with the license plate bracket mounting holes as shown below.



Continued...

- c) Using the supplied self-tapping screws, mount the bracket to the bumper while maintaining proper alignment. Torque the self-tapping screws to 2.6 N·m.

Caution: Do not over tighten self-taping screws.



INVENTORY STORAGE / CUSTOMER DELIVERY

In the event of long-term inventory storage of 30 days or more:

- Charge the vehicle using a Level 2 (240-Volt) charger with the charging limit set to 50%. The suggested state of charge (SOC) for long-term storage is between 30%-50%.

NOTE: When the SOC is 50%, the Multi-Information Display will show an available range approximately 114 miles.



- Every month, check if the battery charge warning light appears on Multi-Information Display. If the warning is illuminated, charge the vehicle using a Level 2 (240-Volt) charger with the charging limit set to 50%.



Customer Delivery:

- Charge the vehicle with the charging limit set to 90% prior to handing over to the customer.
- A 100% charge can be performed if preferred by the retailer.

NOTE: A state of charge of 100% will require more charging time and will disable brake-energy regeneration function due to the battery already having a full charge.

Continued...

IMPORTANT REMINDERS:

- SOA strongly discourages the printing and/or local storage of service information as previously released information and electronic publications may be updated at any time.
- Always check for any open recalls or campaigns anytime a vehicle is in for servicing.
- Always refer to STIS for the latest service information before performing any repairs.