

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Approval: Wheels and Tires (22/26)

Change Over-view: This bulletin replaces bulletin group 4 55/24, dated February 28, 2025.

Vehicle Type: **Sport Limousine: Taycan/Taycan 4/Taycan 4S/Taycan Turbo/Taycan Turbo S/Taycan Turbo GT/Taycan GTS**
Cross Turismo: Taycan 4/Taycan 4S/Taycan Turbo/Taycan Turbo S
Sport Turismo: Taycan/Taycan 4S/Taycan Turbo/Taycan Turbo S/Taycan GTS

Information: Approval status June 2026

Sizes: **Permissible tire and wheel sizes**
(RO = rim offset in mm, FA = front axle, RA = rear axle)

Tire	Tire sizes	Wheel sizes	Snow chains
Taycan Sport Limousine: Standard/Standard 4/4S			
Summer	19- inch FA: 225/55 R 19 103Y XL RA: 275/45 R 19 108Y XL *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	No
	20- inch FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21- inch FA: 265/35 ZR 21 101Y XL RA: 305/30 ZR 21 104Y XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 245/40 R 21 100Y XL RA: 285/35 R 21 105Y XL	FA: 9.0J x 21, RO 56 RA: 11.0J x 21, RO 59	
	21- inch FA: 265/35 R 21 101Y XL RA: 305/30 R 21 104Y XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
All Season **)	19- inch FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL*)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	
	20- inch FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21- inch FA: 265/35 R 21 101H XL RA: 305/30 R 21 104H XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Winter	19- inch FA: 225/55 R 19 103V XL RA: 275/45 R 19 108V XL*)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	RA only
	20- inch FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	RA only
	21- inch FA: 265/35 R 21 103V RA: 305/30 R 21 107V	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	No
Tire	Tire sizes	Wheel sizes	Snow chains
Taycan Sport Limousine: Turbo/Turbo S/Turbo GT (Black Edition/Silver Edition)/GTS			
Summer	20- inch FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL Not for Turbo S/Turbo GT	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	No
	21- inch FA: 265/35 ZR 21 101Y XL RA: 305/30 ZR 21 104Y XL for Turbo: not standard in the USA Not for Turbo GT	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 245/40 R 21 100Y XL RA: 285/35 R 21 105Y XL for Turbo: not standard in the USA Not for Turbo GT	FA: 9.0J x 21, RO 56 RA: 11.0J x 21, RO 59	
	21- inch FA: 265/35 R 21 (101Y) XL RA: 305/30 R 21 (104Y) XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 265/35 R 21 101Y XL RA: 305/30 R 21 104Y XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
All Season **)	20- inch FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL Not for Turbo S/Turbo GT	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	21- inch FA: 265/35 R 21 101H XL RA: 305/30 R 21 104H XL Not for Turbo GT	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
Winter	20- inch FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	RA only
	21- inch FA: 265/35 R 21 103V RA: 305/30 R 21 107V	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	No
Tire	Tire sizes	Wheel sizes	Snow chains
Taycan Sport Limousine: Turbo GT MR			
Summer Perform- ance	21- inch FA: 305/30 ZR 21 (104Y) XL RA: 325/30 ZR 21 (108Y) XL	FA: 11.5J x 21, RO 39 RA: 12J x 21, RO 51	No
Summer Track GT MR	21- inch FA: 305/30 ZR 21 (104Y) XL RA: 335/30 ZR 21 (109Y) XL	FA: 11.5J x 21, RO 39 RA: 12J x 21, RO 51	
Winter	21- inch FA: 265/35 R 21 103V XL RA: 305/30 R 21 107V XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	RA only
Tire	Tire sizes	Wheel sizes	Snow chains
Taycan Cross Turismo: Standard 4/4S/Turbo/Turbo S			
Summer	19- inch FA: 225/55 R 19 103Y XL RA: 275/45 R 19 108Y XL Not for Turbo/Turbo S *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	No
	20- inch FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21- inch FA: 265/35 ZR 21 101Y XL RA: 305/30 ZR 21 104Y XL for Turbo: not standard in the USA	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 245/40 R 21 100Y XL RA: 285/35 R 21 105Y XL for Turbo: not standard in the USA	FA: 9.0J x 21, RO 56 RA: 11.0J x 21, RO 59	

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	21- inch FA: 265/35 ZR 21 (101Y) XL RA: 305/30 ZR 21 (104Y) XL Not for 4S	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 265/35 R 21 101Y XL RA: 305/30 R 21 104Y XL Not for Turbo GT	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
All Season **)	19- inch FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL Not for Turbo/Turbo S *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	
	20- inch FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21- inch FA: 265/35 R 21 101H XL RA: 305/30 R 21 104H XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
All-terrain	20- inch FA: 245/45 R 20 103V XL RA: 285/40 R20 108V XL Not for Turbo/Turbo S	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
Winter	19- inch FA: 225/55 R 19 103V XL RA: 275/45 R 19 108V XL Not for Turbo/Turbo S *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	RA only
	20- inch FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	RA only
	21- inch FA: 265/35 R 21 103V RA: 305/30 R 21 107V	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	No
Tire	Tire sizes	Wheel sizes	Snow chains
Taycan Sport Turismo: Standard/4S/Turbo/Turbo S/GTS			
Summer	19- inch FA: 225/55 R 19 103Y XL RA: 275/45 R 19 108Y XL Not for Turbo/Turbo S/GTS *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	No

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	20- inch FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL Not for Turbo S	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21- inch FA: 265/35 ZR 21 101Y XL RA: 305/30 ZR 21 104Y XL for Turbo: not standard in the USA	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 245/40 R 21 100Y XL RA: 285/35 R 21 105Y XL for Turbo: not standard in the USA	FA: 9.0J x 21, RO 56 RA: 11.0J x 21, RO 59	
	21- inch FA: 265/35 ZR 21 (101Y) XL RA: 305/30 ZR 21 (104Y) XL Not for Standard/4S	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
	21- inch FA: 265/35 R 21 101Y XL RA: 305/30 R 21 104Y XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
All Season **)	19- inch FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL Not for Turbo/Turbo S/GTS *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	
	20-inch FA: 245/45 R 20 103H XLRA: 285/40 R 20 108H XL Not for Turbo S	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	
	21-inch FA: 265/35 R 21 101H XLRA: 305/30 R 21 104H XL	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	
Winter	19- inch FA: 225/55 R 19 103V XL RA: 275/45 R 19 108V XL Not for Turbo/Turbo S/GTS *)	FA: 8.0J x 19, RO 50 RA: 10.0J x 19, RO 47	RA only
	20- inch FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	FA: 9.0J x 20, RO 54 RA: 11.0J x 20, RO 60	RA only
	21- inch FA: 265/35 R 21 103V RA: 305/30 R 21 107V	FA: 9.5J x 21, RO 60 RA: 11.5J x 21, RO 66	No

*) Not with Porsche Ceramic Composite Brake (PCCB) or Porsche Surface Coated Brake (PSCB).

Manufacturer's Certificate

Service

22/26

ENU

4400

4

] Not offered in the following markets: C00, C05, C0B, C0M, C0D, C0K, C0F, C0H, C0L, C0C, C0J, C0E, C07, C08, C09, C0N, C10, C1A, C1K, C11, C1L, C1F, C1C, C1J, C1H, C1D, C1B, C1G, C1E, C12, C13, C1N, C1M, C1P, C1U, C14, C1Q, C1R, C1Y, C15, C1V, C1W, C1X, C16, C1Z, C17, C18, C19, C20, C21, C22, C26, C27, C2C, C28, C29, C3B, C3A, C3E, C3C, C31, C30, C32, C3F, C3L, C3H, C3K, C3Z, C3V, C3Y, C3U, C3G, C3M, C3N, C3P, C3Q, C3S, C3T, C3X, C3J, C3W, C37, C38, C42, C45, C46, C4K, C4C, C4E, C4J, C9C, C96, C9B, C9D, C9A, C98, C9E, C99, C9H, C9P, C9G, C9L, C9J, C9K, C9F, C9M. **The country code for the specif. vehicle can be found in the PCSS under VEHICLE SEARCH WITH VIN, GENERAL DATA, COUNTRY EQUIPMENT.

Spacers:

For the following wheel and tire combinations, 3-mm spacers, part no. 9J1.044.400.10, permitted only on the front axle and only in combination with the track tire.

Tire sizes

FA: 265/35 ZR 21 (101Y) XL
RA: 305/30 ZR 21 (104Y) XL

Track tire

Wheel sizes

FA: 9.5J x 21, RO 60
RA: 11.5J x 21, RO 66

The 3-mm spacers may be used for the following derivative:

Taycan Turbo GT

The 3-mm spacers may be used in combination with the following wheels:

21-inch Taycan Lightweight wheel

9J1.601.025.CK

21-inch RS Spyder Design wheel

9J1.601.025.BC

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Wheels:

Overview of Porsche wheels

Identification on the inside of the wheel:

Wheel size, rim offset (RO) in mm, part number (without color code designation FFF) and Porsche trademark.

19-inch Taycan Aero wheel

FA: 8.0 J x 19, RO 50

Part no. 9J1.601.025.DB__FFF

RA: 10.0 J x 19, RO 47

Part no.

9J1.601.025.DC__FFF



19-inch Taycan Aero

19-inch Taycan S Aero wheel

FA: 8.0 J x 19, RO 50

Part no. 9J1.601.025.DB__FFF

RA: 10.0 J x 19, RO 47

Part no.

9J1.601.025.DC__FFF



19-inch Taycan S Aero

20-inch Taycan Turbo Aero wheel 2

FA: 9.0J x 20, RO 54

Part no.

9J1.601.025.BN__FFF

RA: 11.0J x 20, RO 60

Part no. 9J1.601.025.BP__FFF



20-inch Taycan Turbo Aero 2

Manufacturer's Certificate

Service

22/26

ENU

4400

4

20-inch Taycan Sport Aero wheel

FA: 9.0J x 20, R0 54

Part no. 9J1.601.025.J__FFF

RA: 11.0J x 20, R0 60

Part No. 9J1.601.025.K__FFF



20-inch Taycan Sport Aero

20-inch Taycan Turbo S Aero Design

FA: 9.0J x 20, R0 54

Part no. 9J1.601.025.AG__FFF

RA: 11.0J x 20, R0 60

Part no. 9J1.601.025.AH__FFF



20-inch Taycan Turbo S Aero Design

20-inch TEQ Design

FA: 9.0J x 20, R0 54

Part no. 9J1.601.025.DD__FFF

RA: 11.0J x 20, R0 60

Part no. 9J1.601.025.DE__FFF



20-inch TEQ Design

Manufacturer's Certificate

Service

22/26

ENU

4400

4

20-inch Taycan off-road wheel

FA: 9.0J x 20, R0 54

Part no. 9J1.601.025.AS__FFF

RA: 11.0J x 20, R0 60

Part no. 9J1.601.025.AT__FFF



20-inch Offroad

21-inch Mission E Design wheel

FA: 9.5J x 21, R0 60

Part no. 9J1.601.025.BQ__FFF

RA: 11.5J x 21, R0 66

Part no. 9J1.601.025.BR__FFF



20-inch Mission E Design

21-inch Cross Turismo Design wheel

FA: 9.5J x 21, R0 60

Part no. 9J1.601.025.AL__FFF

RA: 11.5J x 21, R0 66

Part no.

9J1.601.025.AM__FFF



Cross Turismo Design wheel

Manufacturer's Certificate

Service

22/26

ENU

4400

4

21-inch RS Spyder Design wheel

FA: 9.5J x 21, R0 60

Part no. 9J1.601.025.BC__FFF

RA: 11.5J x 21, R0 66

Part no. 9J1.601.025.BD__FFF



21-inch RS Spyder Design wheel

21-inch Taycan Lightweight wheel

FA: 9.5J x 21, R0 60

Part no. 9J1.601.025.CK__FFF

RA: 11.5J x 21, R0 66

Part no. 9J1.601.025.CL__FFF



21-inch Taycan Lightweight wheel

Manufacturer's Certificate

Service

22/26

ENU

4400

4

21-inch Range wheel


FA: 9J x 21, RO 56

Part no.

9J1.601.025.BS.___FFF

RA: 11J x 21, RO 59

Part no. 9J1.601.025.BT.___FFF

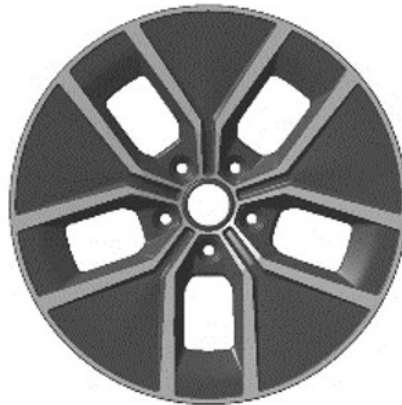

21-inch Range wheel

21-inch Taycan Turbo GT Manthey Racing

FA: 11.5J x 21, RO 39

Part no. 9J1.044.612.00_FFF

RA: 12J x 21, RO 51

Part no. 9J1.044.613.00_FFF

only for Taycan Turbo GT Manthey Racing



21-inch Taycan Turbo GT Manthey Racing

21-inch Taycan Turbo GT Manthey Racing (Trackday)

FA: 11.5J x 21, RO 35

Part no. 9J1.044.610.00_FFF

RA: 12,5J x 21, RO 57

Part no. 9J1.044.611.00_FFF

only for Taycan Turbo GT Manthey Racing



21-inch Taycan Turbo GT (Trackday)

Manufacturer's Certificate

Service

22/26

ENU

4400

4



Information

Improper handling may result in damage to the wheel surface. Only perform tire removal and mounting with a bead holding-down device. Use a leather pad on the rim flange to support the valve extraction tool. Use only the Porsche centring clamping set for balancing. Do not clean wheels with hard brushes, since this will cause deep scratches that cannot be remedied by polishing. Never treat tires with solvents or other chemical substances not recommended by Porsche.



Information

Only fit wheels with identical part numbers on each axle. Exception: 21-inch Exclusive Design wheel and 21-inch Exclusive Design wheels with carbon-fiber aeroblades

Wheel Mounting using wheel bolts:

Tightening torque: 160 Nm (118 ftlb.)

using central lock:

Tightening torque: 600 Nm (443 ftlb.)

Summer Tires:

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Limousine: Standard/Standard 4/4S		Continental PremiumContact 6 NFO FA: https://eprel.ec.europa.eu/qr/483380 RA: https://eprel.ec.europa.eu/qr/482780
	FA: 225/55 R 19 103Y XL RA: 275/45 R 19 108Y XL	Hankook ventus S1 evo NFO FA: https://eprel.ec.europa.eu/qr/463553 RA: https://eprel.ec.europa.eu/qr/463560
		Michelin Pilot Sport 4 NFO FA: https://eprel.ec.europa.eu/qr/412377 RA: https://eprel.ec.europa.eu/qr/410806
	FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL	Michelin Pilot Sport 4 NFO FA: https://eprel.ec.europa.eu/qr/409571 RA: https://eprel.ec.europa.eu/qr/409604

Manufacturer's Certificate

Service

22/26

ENU

4400

4

FA: 265/35 ZR 21 101Y XL
RA: 305/30 ZR 21 104Y XL

Pirelli CintuRato P7 Blue NFO
FA: <https://eprel.ec.europa.eu/qr/595725>
RA: <https://eprel.ec.europa.eu/qr/595726>

Continental SportContact 7 NFO
FA: Label value currently not available
RA: <https://eprel.ec.europa.eu/qr/2620926>

only for standard version

Goodyear Eagle F1 Asymmetric 3 NF1
FA: <https://eprel.ec.europa.eu/qr/1641212>
RA: <https://eprel.ec.europa.eu/qr/1610218>

Pirelli P-ZERO NF1
FA: <https://eprel.ec.europa.eu/qr/1832923>
RA: <https://eprel.ec.europa.eu/qr/1832924>

FA: 245/40 R 21 100Y XL
RA: 285/35 R 21 105Y XL

Continental SportContact 7 NFO
FA: <https://eprel.ec.europa.eu/qr/808735>
RA: <https://eprel.ec.europa.eu/qr/808734>

Hankook iOn evo NFO
FA: <https://eprel.ec.europa.eu/qr/1676447>
RA: <https://eprel.ec.europa.eu/qr/1676435>

FA: 265/35 R 21 101 Y XL
RA: 305/30 R 21 104 Y XL

Goodyear Eagle F1 Asymmetric 5 NF1
FA: <https://eprel.ec.europa.eu/qr/1613727>
RA: <https://eprel.ec.europa.eu/qr/1583619>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Limousine: Turbo/ Turbo S/Turbo GT (Black Edition/Silver Edition)/GTS	FA: 245/45 R 20 103Y XL RA: 285/40 R 20 108Y XL Not for Turbo S/Turbo GT	Michelin Pilot Sport 4 NFO FA: https://eprel.ec.europa.eu/qr/409571 RA: https://eprel.ec.europa.eu/qr/409604
		Pirelli CintuRato P7 Blue NFO FA: https://eprel.ec.europa.eu/qr/595725 RA: https://eprel.ec.europa.eu/qr/595726
	FA: 265/35 ZR 21 101Y XL RA: 305/30 ZR 21 104Y XL For Turbo: not standard in the USA Not for Turbo GT	Goodyear Eagle F1 Asymmetric 3 NF1 FA: https://eprel.ec.europa.eu/qr/1641212 RA: https://eprel.ec.europa.eu/qr/1610218
		Pirelli P-ZERO NF1 FA: https://eprel.ec.europa.eu/qr/1832923 RA: https://eprel.ec.europa.eu/qr/1832924
	FA: 245/40 R 21 100Y XL RA: 285/35 R 21 105Y XL For Turbo: not standard in the USA Not for Turbo GT	Continental SportContact 7 NFO FA: https://eprel.ec.europa.eu/qr/808735 RA: https://eprel.ec.europa.eu/qr/808734
		Hankook iOn evo NFO FA: https://eprel.ec.europa.eu/qr/1676447 RA: https://eprel.ec.europa.eu/qr/1676435

Manufacturer's Certificate

Service

22/26

ENU

4400

4

FA: 265/35 ZR 21 (101Y) XL
RA: 305/30 ZR 21 (104Y) XL

Pirelli P-Zero R NFO
FA: <https://eprel.ec.europa.eu/qr/1790369>
RA: <https://eprel.ec.europa.eu/qr/1790370>

Pirelli P-Zero Trofeo RS NFO

Track tire

FA: currently no values available
RA: currently no values available

FA: 265/35 R 21 101 Y XL
RA: 305/30 R 21 104 Y XL
Not for Turbo GT

Goodyear Eagle F1 Asymmetric 5 NF1
FA: <https://eprel.ec.europa.eu/qr/1613727>
RA: <https://eprel.ec.europa.eu/qr/1583619>

Model

Tire size

Tire make and type/label value (link to EU database)

Taycan Sport Limousine: Turbo GT MR

FA: 305/30 ZR 21 (104Y) XL
RA: 325/30 ZR 21 (108Y) XL

FA: Pirelli Pzero R
FA: NFO
RA: NDO
FA: <http://eprel.ec.europa.eu/qr/1790370>
RA: <http://eprel.ec.europa.eu/qr/1993330>

Performance

FA: 305/30 ZR 21 (104Y) XL
RA: 335/30 ZR 21 (109Y) XL

Pirelli Pzero Trofeo RS NF1
FA: EPREL link currently not available
RA: EPREL link currently not available

Track GT MR

Model

Tire size

Tire make and type/label value (link to EU database)

Taycan Cross Turismo: Standard 4/4S/Turbo/Turbo S

FA: 225/55 R 19 103Y XL
RA: 275/45 R 19 108Y XL
Not for Turbo/Turbo S

Continental PremiumContact 6 NFO
FA: <https://eprel.ec.europa.eu/qr/1790370>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

pa.eu/qr/483380

RA: <https://eprel.ec.europa.eu/qr/482780>

Hankook ventus S1 evo NFO

FA: <https://eprel.ec.europa.eu/qr/463553>

RA: <https://eprel.ec.europa.eu/qr/463560>

Michelin Pilot Sport 4 NFO

FA: <https://eprel.ec.europa.eu/qr/412377>

RA: <https://eprel.ec.europa.eu/qr/410806>

Michelin Pilot Sport 4 NFO

FA: <https://eprel.ec.europa.eu/qr/409571>

RA: <https://eprel.ec.europa.eu/qr/409604>

FA: 245/45 R 20 103Y XL

RA: 285/40 R 20 108Y XL

Pirelli CintuRato P7 Blue NFO

FA: <https://eprel.ec.europa.eu/qr/595725>

RA: <https://eprel.ec.europa.eu/qr/595726>

Goodyear Eagle F1 Asymmetric 3 NF1

FA: <https://eprel.ec.europa.eu/qr/1641212>

RA: <https://eprel.ec.europa.eu/qr/1610218>

FA: 265/35 ZR 21 101Y XL

RA: 305/30 ZR 21 104Y XL

For Turbo: not standard in USA

Pirelli P-ZERO NF1

FA: <https://eprel.ec.europa.eu/qr/1832923>

RA: <https://eprel.ec.europa.eu/qr/1832924>

Continental SportContact 7 NFO

FA: <https://eprel.ec.europa.eu/qr/808735>

RA: <https://eprel.ec.europa.eu/qr/808734>

FA: 245/40 R 21 100Y XL

RA: 285/35 R 21 105Y XL

For Turbo: not standard in USA

Hankook iOn evo NFO

FA: <https://eprel.ec.europa.eu/qr/1676447>

RA: <https://eprel.ec.europa.eu/qr/1676435>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

FA: 265/35 ZR 21 (101Y) XL
RA: 305/30 ZR 21 (104Y) XL
Not for 4S

Pirelli P-Zero R NFO
FA: <https://eprel.ec.europa.eu/qr/1790369>
RA: <https://eprel.ec.europa.eu/qr/1790370>

Pirelli P-Zero Trofeo RS NFO
Track tire

FA: currently no values available
RA: currently no values available

FA: 265/35 R 21 101 Y XL
RA: 305/30 R 21 104 Y XL

Goodyear Eagle F1 Asymmetric 5 NF1

FA: <https://eprel.ec.europa.eu/qr/1613727>
RA: <https://eprel.ec.europa.eu/qr/1583619>

Model

Tire size

**Tire make and type/label value
(link to EU database)**

Taycan Sport Turismo: Standard/4S/Turbo/Turbo S/GTS

FA: 225/55 R 19 103Y XL
RA: 275/45 R 19 108Y XL
Not for Turbo/Turbo S/GTS

Continental PremiumContact 6 NFO

FA: <https://eprel.ec.europa.eu/qr/483380>
RA: <https://eprel.ec.europa.eu/qr/482780>

Hankook ventus S1 evo NFO

FA: <https://eprel.ec.europa.eu/qr/463553>
RA: <https://eprel.ec.europa.eu/qr/463560>

Michelin Pilot Sport 4 NFO

FA: <https://eprel.ec.europa.eu/qr/412377>
RA: <https://eprel.ec.europa.eu/qr/410806>

FA: 245/45 R 20 103Y XL
RA: 285/40 R 20 108Y XL
Not for Turbo S

Michelin Pilot Sport 4 NFO

FA: <https://eprel.ec.europa.eu/qr/409571>
RA: <https://eprel.ec.europa.eu/qr/409604>

Pirelli CintuRato P7 Blue NFO

FA: <https://eprel.ec.europa.eu/qr/595725>
RA: <https://eprel.ec.europa.eu/qr/595726>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

FA: 265/35 ZR 21 101Y XL
RA: 305/30 ZR 21 104Y XL
For Turbo: not standard in USA

Continental SportContact 7 NFO
FA: Label value currently not available
RA: <https://eprel.ec.europa.eu/qr/2620926>
only for standard version

Goodyear Eagle F1 Asymmetric 3 NF1
FA: <https://eprel.ec.europa.eu/qr/1641212>
RA: <https://eprel.ec.europa.eu/qr/1610218>

Pirelli P-ZERO NF1
FA: <https://eprel.ec.europa.eu/qr/1832923>
RA: <https://eprel.ec.europa.eu/qr/1832924>

FA: 245/40 R 21 100Y XL
RA: 285/35 R 21 105Y XL
For Turbo: not standard in USA

Continental SportContact 7 NFO
FA: <https://eprel.ec.europa.eu/qr/808735>
RA: <https://eprel.ec.europa.eu/qr/808734>

Hankook iOn evo NFO
FA: <https://eprel.ec.europa.eu/qr/1676447>
RA: <https://eprel.ec.europa.eu/qr/1676435>

FA: 265/35 ZR 21 (101Y) XL
RA: 305/30 ZR 21 (104Y) XL
Not for Standard/4S

Pirelli P-Zero R NFO
FA: <https://eprel.ec.europa.eu/qr/1790369>
RA: <https://eprel.ec.europa.eu/qr/1790370>

Pirelli P-Zero Trofeo RS NFO
Track tire
FA: currently no values available
RA: currently no values available

FA: 265/35 R 21 101 Y XL
RA: 305/30 R 21 104 Y XL

Goodyear Eagle F1 Asymmetric 5 NF1
FA: <https://eprel.ec.europa.eu/qr/1613727>
RA: <https://eprel.ec.europa.eu/qr/1583619>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

All-Season Tires:

Model

Tire size

Tire make and type/label value
(link to EU database)

Taycan Sport Limousine: Standard/Standard 4/4S	FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL *)	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/483273 RA: https://eprel.ec.europa.eu/qr/482743
		Goodyear Eagle Touring NFO FA: https://eprel.ec.europa.eu/qr/529945 RA: https://eprel.ec.europa.eu/qr/529946
	FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/483338 RA: https://eprel.ec.europa.eu/qr/481297
		Pirelli CintuRato P7 A/S NFO FA: https://eprel.ec.europa.eu/qr/595727 RA: https://eprel.ec.europa.eu/qr/595728
	FA: 265/35 R 21 101 H XL RA: 305/30 R 21 104 H XL	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/482746 RA: https://eprel.ec.europa.eu/qr/481299
		Goodyear Eagle Touring NF1 FA: https://eprel.ec.europa.eu/qr/1621908 RA: https://eprel.ec.europa.eu/qr/1585163

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Limousine: Turbo/ Turbo S/GTS	FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL Not for Turbo S	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/483338 RA: https://eprel.ec.europa.eu/qr/481297
		Pirelli CintuRato P7 A/S NFO FA: https://eprel.ec.europa.eu/qr/595727 RA: https://eprel.ec.europa.eu/qr/595728
	FA: 265/35 R 21 101 H XL RA: 305/30 R 21 104 H XL	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/482746 RA: https://eprel.ec.europa.eu/qr/481299
		Goodyear Eagle Touring NF1 FA: https://eprel.ec.europa.eu/qr/1621908 RA: https://eprel.ec.europa.eu/qr/1585163
Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Cross Turismo: Standard 4/4S/Turbo/Turbo S	FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL Not for Turbo/Turbo S *)	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/483273 RA: https://eprel.ec.europa.eu/qr/482743
		Goodyear Eagle Touring NFO FA: https://eprel.ec.europa.eu/qr/529945 RA: https://eprel.ec.europa.eu/qr/529946
	FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL	Continental ProContact RX NFO FA: https://eprel.ec.europa.eu/qr/483338 RA: https://eprel.ec.europa.eu/qr/481297

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Pirelli CintuRato P7 A/S NF0
FA: <https://eprel.ec.europa.eu/qr/595727>
RA: <https://eprel.ec.europa.eu/qr/595728>

Continental ProContact RX NF0
FA: <https://eprel.ec.europa.eu/qr/482746>
RA: <https://eprel.ec.europa.eu/qr/481299>

Goodyear Eagle Touring NF1
FA: <https://eprel.ec.europa.eu/qr/1621908>
RA: <https://eprel.ec.europa.eu/qr/1585163>

FA: 265/35 R 21 101 H XL
RA: 305/30 R 21 104 H XL

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Turismo: Standard/4S/Turbo/Turbo S/GTS	FA: 225/55 R 19 103H XL RA: 275/45 R 19 108H XL Not for Turbo/Turbo S/GTS *)	Continental ProContact RX NF0 FA: https://eprel.ec.europa.eu/qr/483273 RA: https://eprel.ec.europa.eu/qr/482743
		Goodyear Eagle Touring NF0 FA: https://eprel.ec.europa.eu/qr/529945 RA: https://eprel.ec.europa.eu/qr/529946
	FA: 245/45 R 20 103H XL RA: 285/40 R 20 108H XL Not for Turbo S	Continental ProContact RX NF0 FA: https://eprel.ec.europa.eu/qr/483338 RA: https://eprel.ec.europa.eu/qr/481297

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Pirelli Cinturato P7 A/S NFO

FA: <https://eprel.ec.europa.eu/qr/595727>

RA: <https://eprel.ec.europa.eu/qr/595728>

Continental ProContact RX NFO

FA: <https://eprel.ec.europa.eu/qr/482746>

RA: <https://eprel.ec.europa.eu/qr/481299>

FA: 265/35 R 21 101 H XL

RA: 305/30 R 21 104 H XL

Goodyear Eagle Touring NF1

FA: <https://eprel.ec.europa.eu/qr/1621908>

RA: <https://eprel.ec.europa.eu/qr/1585163>

All-Terrain Tire

Model

Tire size

Tire make and type/label value (link to EU database)

Taycan Cross Turismo: Standard
4/4S

FA: 245/45 R 20 103V XL

RA: 285/40 R 20 108V XL

Pirelli elt S-AT All Terrain Elect
NFO

FA: EPREL link currently not
available

RA: EPREL link currently not
available

Winter Tires:

Model

Tire size

Tire make and type/label value (link to EU database)

Taycan Sport Limousine:
Standard/Standard 4/4S

FA: 225/55 R 19 103V XL

RA: 275/45 R 19 108V XL
*)

Continental TS 860 S NFO

FA: <https://eprel.ec.europa.eu/qr/479702>

RA: <https://eprel.ec.europa.eu/qr/620844>

Pirelli P-Zero Winter NFO

FA: <https://eprel.ec.europa.eu/qr/595723>

RA: <https://eprel.ec.europa.eu/qr/595724>

Goodyear UltraGrip Performance
Gen1 NFO

FA: <https://eprel.ec.europa.eu/qr/529947>

RA: <https://eprel.ec.europa.eu/qr/529948>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Pirelli P-Zero Winter NFO
FA: <https://eprel.ec.europa.eu/qr/595729>
RA: <https://eprel.ec.europa.eu/qr/595730>

Michelin Pilot Alpin 5 NFO
FA: <https://eprel.ec.europa.eu/qr/1944510>
RA: <https://eprel.ec.europa.eu/qr/1944518>

FA: 265/35 R 21 103V
RA: 305/30 R 21 107V

Continental WinterContact TS 860 S NFO
FA: <https://eprel.ec.europa.eu/qr/1838265>
RA: <https://eprel.ec.europa.eu/qr/1838260>

Model

Tire size

**Tire make and type/label value
(link to EU database)**

Taycan Sport Limousine: Turbo/
Turbo S/Turbo GT (Black Edition/Silver Edition)/GTS

FA: 245/45 R 20 103V XL
RA: 285/40 R 20 108V XL

Goodyear UltraGrip Performance Gen1 NFO
FA: <https://eprel.ec.europa.eu/qr/529947>
RA: <https://eprel.ec.europa.eu/qr/529948>

Pirelli P-Zero Winter NFO
FA: <https://eprel.ec.europa.eu/qr/595729>
RA: <https://eprel.ec.europa.eu/qr/595730>

Michelin Pilot Alpin 5 NFO
FA: <https://eprel.ec.europa.eu/qr/1944510>
RA: <https://eprel.ec.europa.eu/qr/1944518>

FA: 265/35 R 21 103V
RA: 305/30 R 21 107V

Continental WinterContact TS 860 S NFO
FA: <https://eprel.ec.europa.eu/qr/1838265>
RA: <https://eprel.ec.europa.eu/qr/1838260>

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Limousine: Turbo GT MR	FA: 265/35 R 21 103V XL RA: 305/30 R 21 107V XL	Continental WinterContact TS 860 S NFO FA: https://eprel.ec.europa.eu/qr/1838265 RA: https://eprel.ec.europa.eu/qr/1838260
Model	Tire size	Tire make and type/label value (link to EU database)
	FA: 225/55 R 19 103V XL RA: 275/45 R 19 108V XL Not for Turbo/Turbo S *)	Continental TS 860 S NFO FA: https://eprel.ec.europa.eu/qr/479702 RA: https://eprel.ec.europa.eu/qr/620844
		Pirelli P-Zero Winter NFO FA: https://eprel.ec.europa.eu/qr/595723 RA: https://eprel.ec.europa.eu/qr/595724
		Goodyear UltraGrip Performance Gen1 NFO FA: https://eprel.ec.europa.eu/qr/529947 RA: https://eprel.ec.europa.eu/qr/529948
Taycan Cross Turismo: Standard 4/4S/Turbo/Turbo S	FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	Pirelli P-Zero Winter NFO FA: https://eprel.ec.europa.eu/qr/595729 RA: https://eprel.ec.europa.eu/qr/595730
		Michelin Pilot Alpin 5 NFO FA: https://eprel.ec.europa.eu/qr/1944510 RA: https://eprel.ec.europa.eu/qr/1944518
	FA: 265/35 R 21 103V RA: 305/30 R 21 107V	Continental WinterContact TS 860 S NFO FA: https://eprel.ec.europa.eu/qr/1838265 RA: https://eprel.ec.europa.eu/qr/1838260

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Model	Tire size	Tire make and type/label value (link to EU database)
Taycan Sport Turismo: Standard/4S/Turbo/Turbo S/GTS	FA: 225/55 R 19 103V XL RA: 275/45 R 19 108V XL Not for Turbo/Turbo S/GTS *)	Continental TS 860 S NFO FA: https://eprel.ec.europa.eu/qr/479702 RA: https://eprel.ec.europa.eu/qr/620844
		Pirelli P-Zero Winter NFO FA: https://eprel.ec.europa.eu/qr/595723 RA: https://eprel.ec.europa.eu/qr/595724
	FA: 245/45 R 20 103V XL RA: 285/40 R 20 108V XL	Goodyear UltraGrip Performance Gen1 NFO FA: https://eprel.ec.europa.eu/qr/529947 RA: https://eprel.ec.europa.eu/qr/529948
		Pirelli P-Zero Winter NFO FA: https://eprel.ec.europa.eu/qr/595729 RA: https://eprel.ec.europa.eu/qr/595730
		Michelin Pilot Alpin 5 NFO FA: https://eprel.ec.europa.eu/qr/1944510 RA: https://eprel.ec.europa.eu/qr/1944518
		FA: 265/35 R 21 103V RA: 305/30 R 21 107V
Arrow with inscription Rotation	= directional mounting	
"Inside/Outside" inscription	= side-specific mounting	
Arrow with both inscriptions Rotation and Inside/Outside	= directional and side-specific mounting	

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Information

In some countries, only tires with a speed index that safeguard the vehicle to at least the maximum vehicle speed are generally allowed to be mounted on the vehicle. Please check and observe the national regulations. There may be national exemptions for winter tires with the marking 3PMSF (3 peak mountain snow flake), which also permit tyres that do not safeguard to the maximum vehicle speed. Porsche winter tires always have a 3PMSF marking and the speed index "V" (up to 149 mph/240 km/h).



3PMSF

Information

"N..." = Specification code of the tyre, e.g. "N0", "N1", "N2" or "Nx0", "Nx1", "Nx2" ...

For the relevant tire makes, the complete "N..." code must be located on the tire sidewall close to the type designation. The instructions for mounting the tires properly in accordance with regulations are also on the tire sidewall. If there are no mounting instructions on the tire sidewall, the tire must be mounted so that the DOT code is visible from the outside.

Information

As a general rule, Porsche does not recommend having tires repaired. Local legislation must always be observed.

It is advisable to change to winter tires for temperatures below 44°F/7°C, since the driving performance of summer tires and UHP tires is reduced at low temperatures. Subfreezing temperatures can cause permanent damage to summer tires and UHP tires.

When replacing one tire on an axle, make sure that the tread depth of the new tire does not differ from that of the old tire by more than 30%. If this value is exceeded, we recommend that you replace both tires.

Refer to WM 449503 for the specific details of the vehicle you are working on.

- > The 2mm specification will be given here.
- > If there is none listed then the default is 30%.

Manufacturer's Certificate

Service

22/26

ENU

4400

4

⚠ WARNING

Incorrect tire pressure

- **Uncontrollable vehicle handling**

- Adjust the tire pressure according to specifications. Never allow the pressure to fall below the minimum pressure.
- Check age of tires. Recommendation: Replace tires that are more than 6 years old.
- Perform visual inspections.
- Only use tires approved by Porsche.

⚠ WARNING

Driving with different tires (mixed tires)

- **Uncontrollable vehicle handling**

- Only use tires of the same make and type, with the same speed index and the same specification code (N0, N1, N2, etc. or Nx0, Nx1, Nx2, etc.) on a vehicle.

Tire Pressure:



Information

The tire pressure only applies to the tyre makes and types approved by Porsche and is specified for cold tires (approx. 68°F/20°C). The values are not allowed to be lower than those specified.

Standard tire pressure for summer tires + UHP, 4/5 seater

Wheel size	Taycan Standard 2wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.4 bar 35 psi	-	2.4 bar 35 psi	-
	-	2.3 bar 33 psi	-	2.6 bar 37 psi
20-inch wheels	2.4 bar 35 psi	-	2.4 bar 35 psi	-
	-	2.3 bar 33 psi	-	2.6 bar 37 psi
21-inch narrow - wheels	2.6 bar 37 psi	-	2.6 bar 37 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch wheels	2.3 bar 33 psi	-	2.5 bar 36 psi	-
	-	2.5 bar 36 psi	-	3.0 bar 44 psi
Wheel size	Taycan Standard 4wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	2.9 bar 42 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
Wheel size	Taycan Standard 4S 4wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi

Manufacturer's Certificate

Service

22/26

ENU

4400

4

21-inch narrow - wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.8 bar 41 psi	-	3.0 bar 44 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
Taycan GTS (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Taycan Turbo (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch narrow - wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.8 bar 41 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo S (Limousine)			
	part load		full load	
	FA	RA	FA	RA
21-inch narrow - wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.8 bar 41 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan Base 4 (Cross Turismo), 4S (Cross Turismo), 4S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
20-inch wheels	2.6 bar 37 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Taycan Turbo (Cross Turismo)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.8 bar 41 psi	-	3.0 bar 44 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Taycan Turbo S (Cross Turismo)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.6 bar 37 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Taycan (Sport Turismo)				
Wheel size	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.6 bar 37 psi	-	2.6 bar 37 psi	-
	-	2.3 bar 33 psi	-	2.6 bar 37 psi

Manufacturer's Certificate

Service

22/26

ENU

4400

4

20-inch wheels	2.6 bar 37 psi	-	2.6 bar 37 psi	-
	-	2.3 bar 33 psi	-	2.6 bar 37 psi
21-inch narrow - wheels	2.5 bar 36 psi	-	2.5 bar 36 psi	-
	-	2.5 bar 36 psi	-	2.9 bar 42 psi
21-inch wheels	2.4 bar 35 psi	-	2.5 bar 36 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi
Taycan GTS (Sport Turismo)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch narrow - wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Taycan Turbo (Sport Turismo)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.8 bar 41 psi
21-inch narrow - wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.8 bar 41 psi	-	3.2 bar 46 psi
Wheel size	Taycan Turbo S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
21-inch narrow - wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.8 bar 41 psi	-	3.2 bar 46 psi
Wheel size	Taycan Turbo GT (Silver Edition)			
	part load		full load	
	FA	RA	FA	RA
21-inch Perfo/ Track	3.3 bar 48 psi	-	3.5 bar 51 psi	-
	-	3.3 bar 48 psi	-	3.5 bar 51 psi
Wheel size	Taycan Turbo GT (Black Edition)			
	part load		full load	
	FA	RA	FA	RA
21-inch Perfo/ Track	3.1 bar 45 psi	-	3.3 bar 48 psi	-
	-	3.2 bar 46 psi	-	3.5 bar 51 psi
Standard tire pressure for all-season tires, 4/5- seater				
Wheel size	Taycan Standard 2wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA

Manufacturer's Certificate

Service

22/26

ENU

4400

4

19-inch wheels	2.3 bar 33 psi	-	2.5 bar 36 psi	-
	-	2.3 bar 33 psi	-	2.7 bar 39 psi
20-inch wheels	2.3 bar 33 psi	-	2.5 bar 36 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.5 bar 36 psi	-	2.6 bar 37 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Taycan Standard 4wd (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.3 bar 33 psi	-	2.7 bar 39 psi
20-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.3 bar 33 psi	-	2.7 bar 39 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
Taycan GTS (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo (Limousine)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.5 bar 36 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo S (Limousine)			
	part load		full load	
	FA	RA	FA	RA
21-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Wheel size	Taycan Base 4 (Cross Turismo), 4S (Cross Turismo), 4S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo (Cross Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo S (Cross Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan GTS (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.4 bar 35 psi	-	2.6 bar 37 psi	-
	-	2.4 bar 35 psi	-	2.7 bar 39 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi
Wheel size	Taycan Turbo S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.8 bar 41 psi	-	3.1 bar 45 psi

Manufacturer's Certificate

Service

22/26

ENU

4400

4

Standard tire pressure for winter tires, 4/5 seats

Wheel size	Taycan Standard 2wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.9 bar 42 psi
20-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.5 bar 36 psi	-	2.9 bar 42 psi
21-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.8 bar 41 psi	-	3.2 bar 46 psi
Wheel size	Taycan Standard 4wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi
20-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.1 bar 45 psi	-
	-	2.8 bar 41 psi	-	3.2 bar 46 psi
Wheel size	Taycan 4S 4wd (Limousine)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi

Manufacturer's Certificate

Service

22/26

ENU

4400

4

20-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.1 bar 45 psi	-
	-	2.8 bar 41 psi	-	3.2 bar 46 psi
Taycan GTS (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.6 bar 37 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.2 bar 46 psi
Taycan Turbo (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.2 bar 46 psi
Taycan Turbo S (Limousine)				
Wheel size	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.2 bar 46 psi
Wheel size	Taycan Base 4 (Cross Turismo), 4S (Cross Turismo), 4S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.3 bar 48 psi
Wheel size	Taycan Turbo (Cross Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.3 bar 48 psi
Wheel size	Taycan Turbo S (Cross Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.3 bar 48 psi
Wheel size	Taycan Sport Turismo			
	part load		full load	
	FA	RA	FA	RA
19-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.6 bar 37 psi	-	2.9 bar 42 psi
20-inch wheels	2.5 bar 36 psi	-	2.7 bar 39 psi	-
	-	2.6 bar 37 psi	-	2.9 bar 42 psi
21-inch wheels	2.6 bar 37 psi	-	2.7 bar 39 psi	-
	-	2.9 bar 42 psi	-	3.2 bar 46 psi
Wheel size	Taycan GTS (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.0 bar 44 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.2 bar 46 psi
Wheel size	Taycan Turbo (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.3 bar 48 psi
Wheel size	Taycan Turbo S (Sport Turismo)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	3.1 bar 45 psi
21-inch wheels	2.8 bar 41 psi	-	3.0 bar 44 psi	-
	-	2.9 bar 42 psi	-	3.3 bar 48 psi
Wheel size	Taycan Turbo GT (Silver Edition)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.6 bar 37 psi	-	2.8 bar 41 psi	-
	-	2.4 bar 35 psi	-	2.6 bar 37 psi
21-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.7 bar 39 psi	-	2.9 bar 42 psi
Wheel size	Taycan Turbo GT (Black Edition)			
	part load		full load	
	FA	RA	FA	RA
20-inch wheels	2.7 bar 39 psi	-	2.8 bar 41 psi	-

Manufacturer's Certificate

Service

22/26

ENU

4400

4

	-	2.6 bar 37 psi	-	2.8 bar 41 psi
21-inch wheels	2.8 bar 41 psi	-	2.9 bar 42 psi	-
	-	2.9 bar 42 psi	-	3.0 bar 44 psi

The permitted speed threshold for Comfort tire pressure depends on the vehicle's country-specific equipment and cannot be selected.

Comfort tire pressure for summer tires up to 270 km/h (165 mph)

Wheel size	Taycan Turbo GT (Silver Edition, Black Edition)	
	FA	RA
21-inch Perfo/Track	2.6 bar 37 psi	-
	-	2.6 bar 37 psi

Snow chains:



WARNING

Incorrectly fitted snow chains

- **Uncontrollable vehicle handling**

- Do not exceed a top speed of 31 mph (50 km/h).
- Read assembly instructions (see also TEQUIPMENT accessory finder on the Internet).
- Comply with country-specific regulations.

Porsche offers the following snow chains as accessories:

Tire size	Porsche Part no.	Type of snow chain
275/45 R 19	9J1.073.690.A	Quick fit
285/40 R 20	9J1.073.690.A	Quick fit
305/30 R 21		
only for Turbo GT with Weissach package and Manthey Kit	992.044.690.C	Quick fit

- Wheel Storage:
- Tires must be stored in a cool, dry and dark room with adequate ventilation.
 - Tires must never come into contact with fuel, oil, grease or chemicals.
 - Do not store summer tires in storage areas with ambient temperatures of less than 5° F (-15° C).
 - Complete wheel & tire assemblies can be stacked for storage; we recommend that you increase the tire pressure by approximately 6 psi (0.4 bar).
 - Optimum conditions for storage of the complete wheels are provided by the Original Porsche storage trolley, Part No. 000.044.000.38.

Manufacturer's Certificate

Service

22/26

ENU

4400

4

- If the tires are not mounted on wheels, it is best to store them in a vertical position.
- We recommend that you turn tires stored in this position every two weeks in order to prevent flat spots.
- Tires that are stacked in a horizontal position will become severely deformed and cannot be seated properly in the rim flange when they are mounted.

General Information:

- Always use new valves when changing tires.
- Always observe any possible instructions concerning the rolling direction and/or specifying which side the tires must be mounted on.
- Coat the tire beads and humps with mounting lubricant before mounting the tire. This ensures that the tire beads will slide over the humps easily.
- In order to prevent the tire from turning on the wheel, avoid extreme driving maneuvers (acceleration and braking) during the first 100 to 200 miles with new or recently mounted tires.
- In order to optimize smoothness of rolling, it is appropriate - and necessary in individual cases - to mount the tire in a certain (favorable) position with respect to the wheel (matching).

Matching (uncontrolled and controlled) is explained below: Uncontrolled matching:

- Turning the tire on the wheel by 90° or 120° if necessary in order to achieve an acceptable value with regard to rolling smoothness (true running, imbalance and weight distribution of balance weights).

Controlled matching:

- With a balancing machine with matching program. In most cases, this produces an even better result with regard to the rolling smoothness (true running, imbalance and weight distribution of the balance weights) than can be achieved with uncontrolled matching.
- Maximum permissible radial runout and lateral runout of the wheels < 0.7 mm. Maximum permissible radial runout and lateral runout of the wheels with tires < 1.25 mm. Values < 1.50 mm - ideally approx. 0.5 mm - are desirable.
- The mounting pressure (seating pressure) of 58 psi/4.0 bar overpressure must not be exceeded before both tire beads are evenly seated on the rim flange.

New Tires (Replacements):

- If new tires are to be mounted or the tires of one axle are to be replaced, tires of the same make, type and with the same specification code must always be used on each of the two axles.
- If tires are replaced on one axle only, the different tread depth from that on the other axle can cause a noticeable change in the familiar handling.
- This is especially the case if new tires are mounted on the rear axle.
- This effect decreases with increasing tire mileage.

When replacing a tire on an axle, make sure that the tread depth of the new tire does not differ from that of the other tire on the same axle by more than 30 %.

Refer to WM 449503 for specific details of the vehicle you are working on.

- > The 2mm specification will be given here.
- > If there is none listed then the default is 30%.

Repairs to Tires:

- If a tire is damaged and it cannot be determined with absolute certainty that there is no ply damage - with all of its consequences - or if the tire was thermally or mechanically overloaded due to a loss of pressure or other prior damage, we recommend replacement of the tire in question for safety reasons.
- Repairs to "V", "W", "Y", and "Z" tires are not permissible, as is the use of inner tubes in tubeless tires.

Tire Aging:

- Tires age due to chemical and physical processes, which can impair their function.

Manufacturer's Certificate

Service

22/26

ENU

4400

4

- Tires that are stored unused for an extended period harden and become brittle faster than tires that are in continual use.
- Hairline aging cracks can occur on older tires.
- On tires in continual use, the kneading action activates the plasticizer in the rubber and thereby prevents hardening and cracking.
- Therefore, attention should be paid not only to the tread depth but also to the age of the tire.
- Tires should not be older than 6 years.
- The age of the tire can be determined via the DOT code on the sidewall, which indicates the production date of the tire: e.g. DOT 2201= 22nd week of 2001.

Important Notice: Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. Part numbers listed in these bulletins are for reference only. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© 2026 Porsche Cars North America, Inc.