



MONACO RV

A NAVISTAR COMPANY

Monaco RV, LLC  
91320 Coburg Industrial Way  
Coburg, OR 97408 USA

AUGUST 2011

## Converter Neutral Wiring

Recall Numbers 11V376000 US and 2011- 267 CA  
Monaco File 11515

### Products Affected

R-Vision: 2011 Onyx, Trail Sport, & Trail-Lite Crossover Travel Trailers

### Purpose of Recall

Inspect and re-wire, if necessary, the converter neutral wire at the load center.

*Read these instructions carefully and become thoroughly familiar with the procedures before beginning repairs. Disconnect or shut off 110V power sources.*

### Inspection Process

- Remove the metal cover over the 110V load panel by removing the two screws — see figure 1.
- Find the location of the converter neutral wire (white).
- If the converter neutral wire is connected to the ground bar, follow the repair process—see figure 2.
- If the converter neutral wire is connected to the neutral bar, it is correct and no repair is necessary—see figure 3. Reinstall the metal cover for the 110V load center.

### Repair Process

- Remove the converter neutral wire from the ground bar and route over to the neutral bar and secure —see figure 3.
- Reinstall the metal cover for the 110V load center.

### Tools Required

- Standard or square tip screw driver
- Phillips tip screw driver

### Parts Required

- No parts required

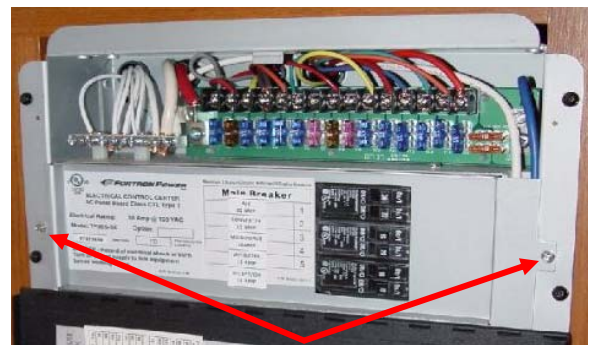


Fig. 1—Remove screws to access the 110V load panel.

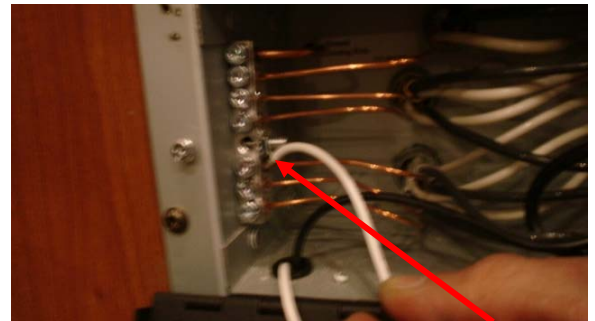


Fig. 2—Neutral wire connected to ground bar. **INCORRECT**

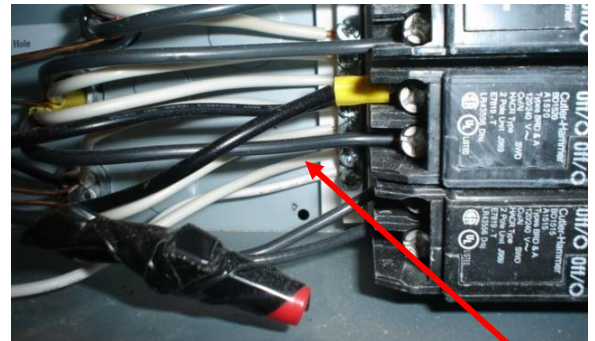


Fig. 3—Neutral wire connected to neutral bar. **CORRECT**

### ***Warranty Claim Information***

Warranty claims must be submitted on MDEX.

### ***Labor Operation Codes:***

22D20552RC for US Recall 11V376000

22D30552RC for CA Recall 2011-267

### ***Labor Time Allowance:***

Inspection only - .20 hrs.

Inspection and repair - .30 hrs.

### ***Further Information***

For information regarding recall instructions, please call the Recall Hotline at (800) 685-6545.

For questions regarding MDEX or claims, please call (877) 332-9239 and follow the prompts that support the product with which you are dealing.