



## INSTRUCTIONS TO PERFORM CAMPAIGN 127 (Era® Models 144U, 170A, 170R, and 170X) (View® Profile/Navion® iQ Models 524G and 524V)

### Models Affected:

Certain 2009 through 2013 model year Winnebago Industries Era (Models 144U, 170A, 170R, and 170X) and Winnebago View Profile/Itasca Navion iQ (Models 524G and 524V) motorhomes.

These motorhomes were manufactured November 13, 2007 through August 10, 2012.

### Kit Includes:

- (1) 3-Amp. Fuse (Violet)
- Instructions

### Procedure:

Remove current 5-amp. (tan) refrigerator fuse and replace with 3-amp. (violet) refrigerator fuse, as required.


1. Locate the Power Center. See Photo A.



*(Typical View)*

2. Open the Power Center panel.

3. View "DC Distribution Panel," label to locate the 5-amp. (tan) refrigerator fuse (generally the far right fuse in the power center). Remove the current 5-amp. (tan) fuse and discard. **NOTE: There is also a 15-amp. refrigerator fuse. Do not change the 15-amp. refrigerator fuse.** See Photo B.

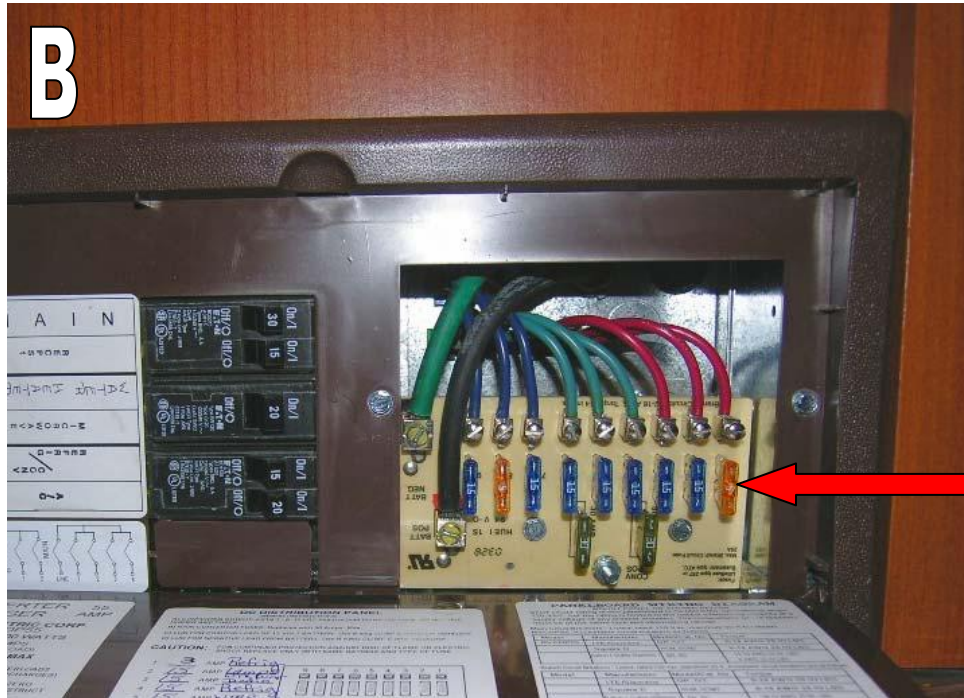


(Typical View)  
(Fuse configuration may vary by model according to available equipment)

4. Install new 3-amp. (violet) fuse (from kit) into socket. See Photo C.




(Typical View)

- On the "DC Distribution Panel," label with a permanent marker, black out the "5" and write in a "3" for the refrigerator. See Photos D and E.

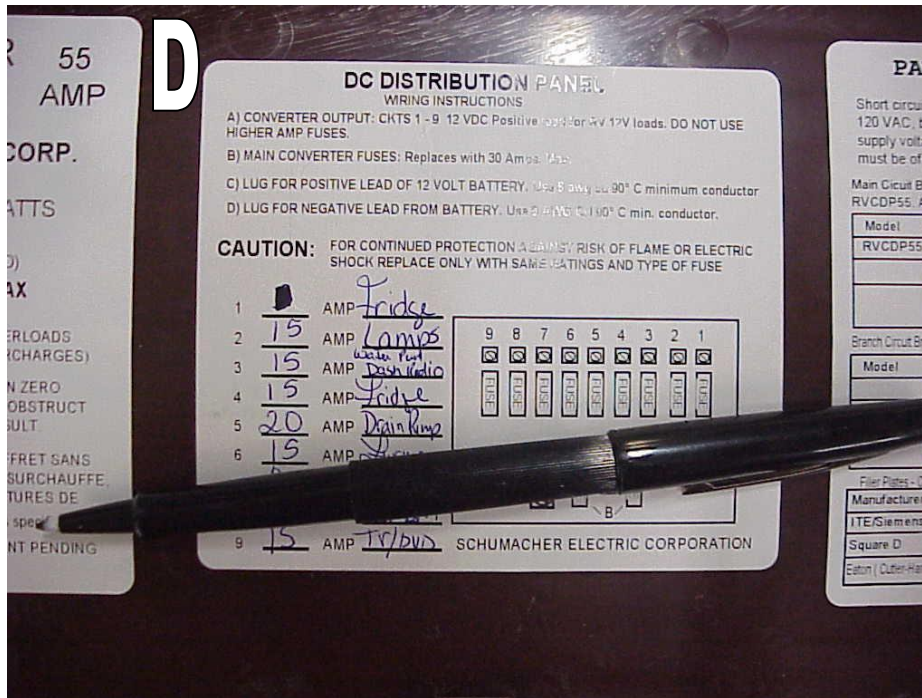

(With a Permanent Marker, Black Out the "5" on Line 1)

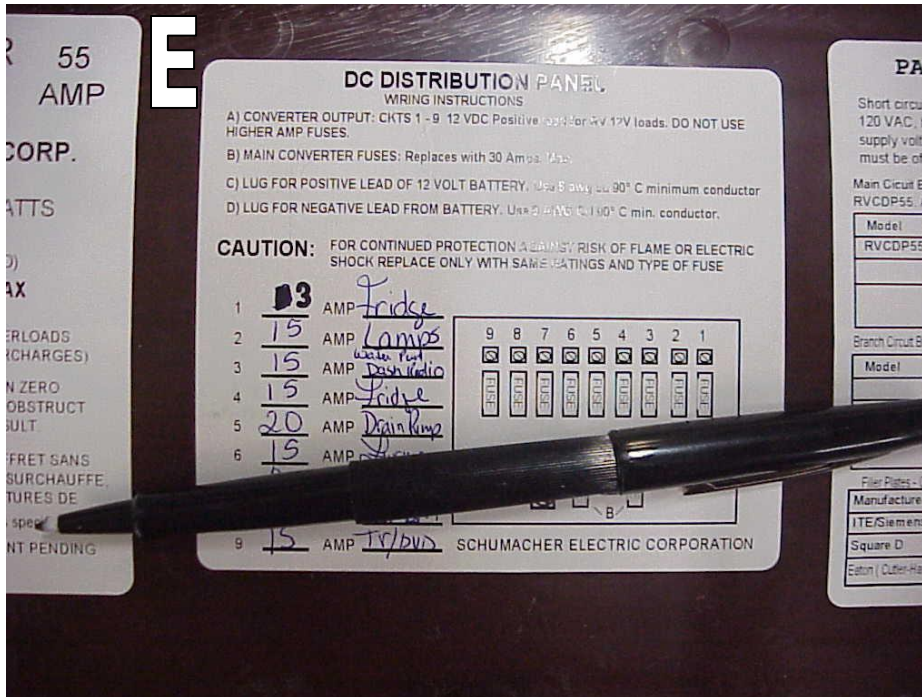

(With a Permanent Marker, Black Out the Number "5" and Write In "3")

- Complete the preaddressed, postage-paid postcard attached to the bottom of your recall letter and mail to Winnebago Industries, Inc.
- Installation complete.