



INSTRUCTIONS TO PERFORM CAMPAIGN 127 (Via®/Reyo® Models H25Q, H25R, and H25T)

Models Affected:

Certain 2009 through 2013 model year Winnebago Via/Itasca Reyo (Models H25Q, H25R, and H25T) motorhomes.

These motorhomes were manufactured November 13, 2007 through August 10, 2012.

Kit Includes:

- (1) 3-Amp. Fuse (Violet)
- (1) 15-Amp. Fuse (Blue)
- Instructions

Procedure:

Remove current 5-amp. (tan) and 20-amp. (yellow) refrigerator fuses and replace with 3-amp. (violet) and 15-amp. (blue) refrigerator fuses, as required.


1. Locate the Power Center. See Photo AA.



(Typical View)

2. Open the Power Center panel.

3. View "DC Distribution Panel," label to locate the refrigerator fuse (generally the far right fuse in the power center). Remove the current 5-amp. (tan) fuse and discard. See Photo BB.

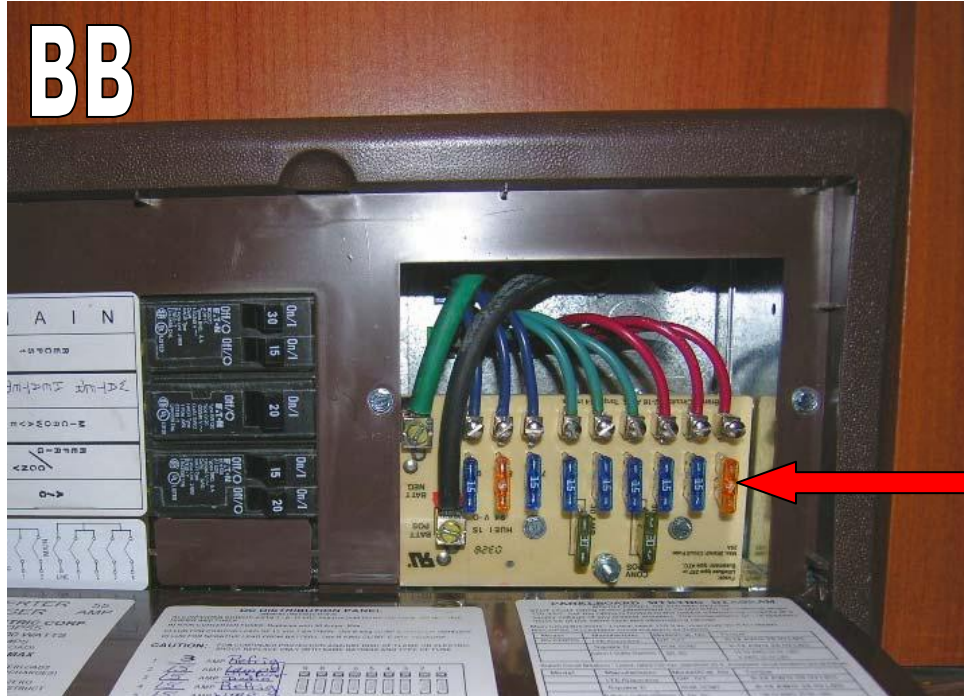

(Typical View)
(Fuse Configuration May Vary By Model According to Available Equipment)

4. Install new 3-amp. (violet) fuse (from kit) into socket. See Photo CC.



(Typical View)

5. View "DC Distribution Panel," label to locate the 20-amp. (yellow) refrigerator fuse location. Remove the current 20-amp. (yellow) fuse and discard. See Photo DD.




(Typical View)

6. Install new 15-amp. (blue) fuse (from kit) into Socket 5. See Photo EE.




(Typical View)

- On the "DC Distribution Panel," label with a permanent marker, black out the "5" and write in a "3" and black out the "20" and write in "15." See Photos FF and GG.

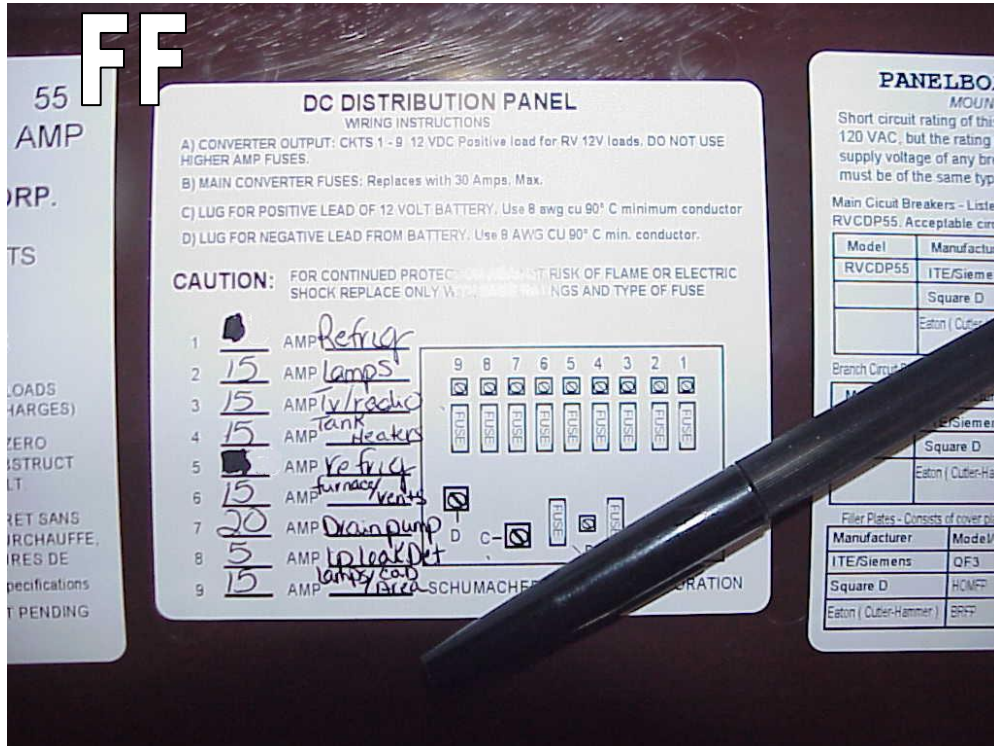

(With a Permanent Marker, Black Out the 5 and 20 Number on the Refrigerator Circuits)

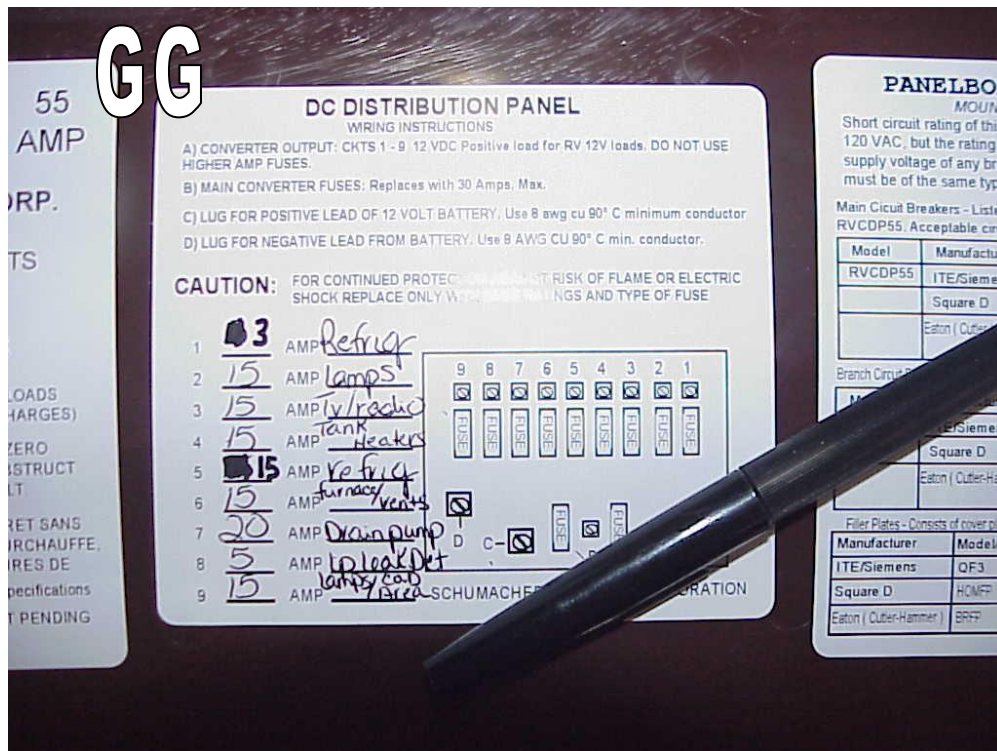

(With a Permanent Marker, Write in the "3" and "15")

- Complete the preaddressed, postage-paid postcard attached to the bottom of your recall letter and mail to Winnebago Industries, Inc.
- Installation complete.