



**PERFORM THE PROCEDURE OUTLINED IN THIS SERVICE INFORMATION ON ALL AFFECTED VEHICLES BEFORE CUSTOMER DELIVERY OR THE NEXT TIME THEY ARE IN THE SHOP FOR MAINTENANCE OR REPAIRS.**

#### SUBJECT

**Service Action: Grease Engine Starter Electrical Terminals**

#### MODEL

F56 (Cooper)

With the B38 engine

F56 (Cooper S)

With the B48 engine

#### SITUATION

Due to the location of the engine starter, the electrical contacts must be coated with special contact grease for protection from moisture and outside elements.

#### AFFECTED VEHICLES

This Service Action involves certain F56 MINI Cooper and Cooper S vehicles produced from 12/16/2013 to 4/11/2014.

First check if a Service Action label with a code number **65** is already attached to the B-pillar.

If a code number **65** has been punched out, the Campaign has already been performed and no further action is necessary.

Vehicles which require this Service Action to be completed will show it as "Open" when checked either in the "Service Menu" of DCSnet (Dealer Communication System) or with the Key Reader.

#### PROCEDURE

Refer to the attachment for the repair instructions with illustrations.


#### PARTS INFORMATION

Part Number	Description	Quantity
83 19 2 295 229	Protective Contact grease KF1 (50g)	5 grams

One container of this protective contact grease is sufficient for about 10 vehicles.

#### LABEL INSTRUCTIONS

	<p>This Service Action has been assigned code number <b>65</b>. After the vehicle has been checked and/or corrected, obtain a label (MD20-064) and:</p> <p>A. Emboss your MINI dealer warranty number in the middle of the label (1);</p> <p>B. Punch out code number <b>65</b> (2), printed on the</p>
--	---

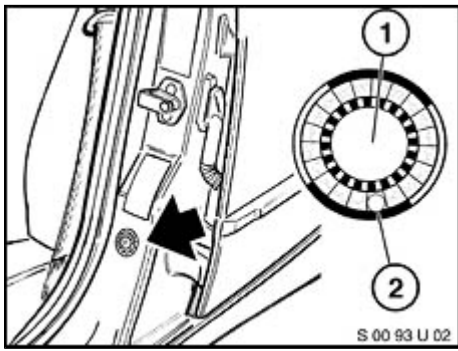

- label; and
- C. Affix the label to the B-pillar as shown.

If the vehicle already has a label from a previous Service Action/Recall Campaign, affix the new label next to the old one. Do not affix one label on top of another one because a number from an underlying label could appear in the punched-out hole of the new label.

#### WARRANTY INFORMATION

Reimbursement for this Service Action will be via normal claim entry utilizing the following information:

<b>Defect Code:</b>	<b>00 12 70 03 00</b>	
<b>Labor Operation:</b>	<b>Labor Allowance:</b>	<b>Description:</b>
00 62 564	4 FRU	Apply contact protection grease to the starter electrical terminals

Labor operation code 00 62 564 is a Plus labor operation.

#### Sublet - Materials

Sublet code 4	See sublet reimbursement calculation below	Reimbursement for the used quantity of Protective Contact grease (Bulk P/N 83 19 2 295 229 – 50g. Do not use this part number for claim submission)
---------------	--	---

Sublet calculation: Reimbursement for 5g of Protective Contact grease (bulk P/N 83 19 2 295 299 – 50g container) at dealer net plus handling. Enter this material cost in sublet and itemize the amount in the claim comment section.

#### ATTACHMENTS

View PDF attachment [M120314 F56 Starter Grease Procedure](#).