



## 00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

---

## Condition

Applicable Vehicles					
Model(s)	Year	Eng. Code	Trans. Code	VIN Range From	VIN Range To
All	2016 – 2023	All	All	All	All

Revision Table			
Instance Number	Published Date	Version Number	Reason For Update
2054866/5	10/24/2022	00-19-04	Include additional model year applicability.
2054866/4	8/18/2021	00-19-04	Include additional model and model year applicability.
2054866/2	12/8/2020	00-19-04	Content added.
2054866/1	7/17/19	00-19-04	Original publication.

The purpose of this bulletin is to explain how to set up and use the SD Creator program.

## Technical Background

Volkswagen has made software updates for infotainment systems (MIB systems) and digital cockpit instrument clusters (FPK) available for direct download via the SD Creator program.

## Production Solution

Not applicable.



## 00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

---

## Service

### Note:

1. The SD Creator is only permitted to be used to create a software update SD card or USB device according to a Technical Bulletin or Campaign, or upon specific direction from the Volkswagen Technician's Helpline or a QTM.
2. Making copies of an SD card or USB device prepared with the SD Creator is not permitted! If several copies are desired, use the SD Creator again to produce them. The SD Creator checks whether the SD card or USB device is suitable to be used. Software updates with a copied SD card or USB device can damage the device (for example, if the software update is interrupted). Devices damaged by an interrupted software update cannot be claimed under warranty.

### 1. General Prerequisites:

- ODIS Service with VAS tester.
- A valid MirrorServer Certificate installed on a VAS tester with the ODIS Service.
- Part number of the software update.
- If using a VAS 6150A, a commercially available USB-to-SD card adapter will be needed.

### Note:

If using VAS 6150A with a USB-to-SD card reader, remove any other USB-connected memory sticks or flash drives before using the SD Creator to avoid data loss if the wrong drive letter is selected.

### 2. Selecting the appropriate SD Card or USB Device:

Refer to the technical bulletin which suggests the software update to obtain the appropriate file size.

### Note:

Make sure to backup any important data which is already installed on the SD card or USB device before starting the download process! When the download process is started, the SD Creator program will format and wipe all data from the SD card or USB device!

Shown is an example of a suitable commercially available SD card that is compatible with the SD creator.

Please note the following:

- Do Not use a micro SD in a full size SD adaptor (use only a full-size SD card).
- SDHC standard.
- Speed class 10.





## 00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022


- Adequate memory capacity for SD card update being created.
- Unlocked write-protect switch.
- For USB devices, use a commercially available USB stick in:
  - USB type C (at least USB 2.0), reading/writing speed: at least 40 MB/s / 10 MB/s.
  - USB type A including type C (at least USB 2.0), reading/writing speed: at least 40 MB/s / 10 MB/s.
  - USB type A with adapter to USB type C possible (at least USB 2.0), reading/writing speed: at least 40 MB/s / 10 MB/s.



**Note:** Please do not use a USB hub (USB distributor to use several USB devices on one USB port) to install the software update for the infotainment control unit.

### 3. Installing the SD Creator program (IT Administrator help may be required):

- 1) Using a VAS tester with ODIS Service, open a web browser (i.e. Internet Explorer) and navigate to <https://mirrorserver2.vwuhub.com/dav/BTAC/Trade-Retail/Tools/SD-Creator/>.
- 2) The installation instructions and user manual are located in the same directory and labeled as "User\_manual\_SD\_Creator\_V1.3\_EN.pdf".
- 3) The instruction should be downloaded and saved on the ODIS tester for future reference.
- 4) If prompted by the Windows operating system for a security certificate, select the MirrorServer certificate for the machine.

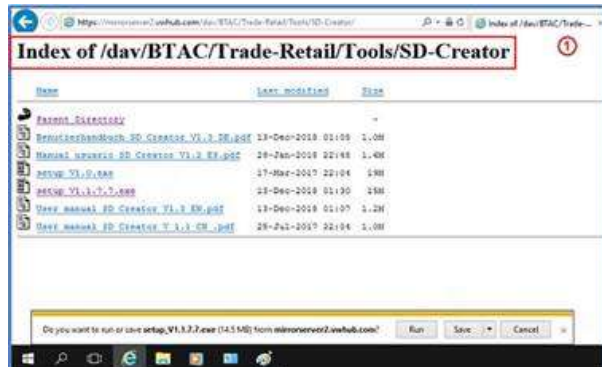




00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

5) Within this folder is the “SD Creator” installation file labeled “**setup\_V1.1.7.7.exe**” (1). Click on the file, and then click “**Save**” (2) to save the install file to the desktop or other location on the ODIS tester. If this file cannot be downloaded, please contact the dealership IT administrator.

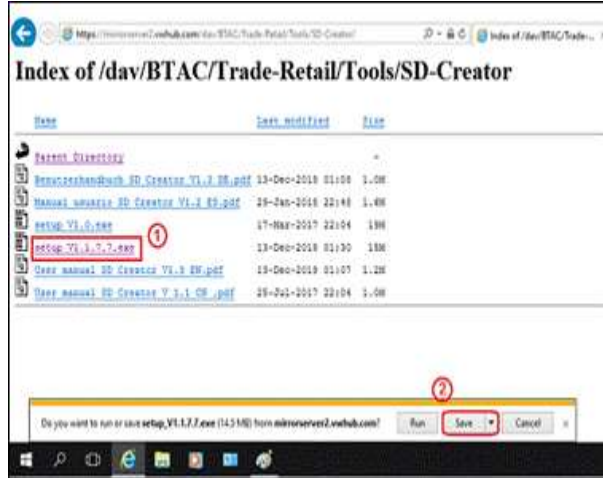

6) After the installation file has successfully downloaded, install the program onto the VAS tester with ODIS Service by double clicking the file labeled “**setup\_V1.1.7.7.exe**” to run the installation program. If I.T. policies restrict the installation of programs on the VAS tester with ODIS Service ask the I.T. administrator to perform the install.

7) After double-clicking the installation file “**setup\_V1.1.7.7.exe**” the program installation begins.





00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

8) At this screen, click "Next" to proceed with the installation.





00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

9) At this screen, click "Install" to proceed with the installation.





00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

10) When complete, click “Finish” the installation window will close.





## 00-19-04 - Set-up SD Creator to Obtain Software Updates


Release date: 10/24/2022

11) After the program has installed successfully, the icon titled “SD Creator” will appear on the desktop.



#### 4. Initial steps for setup of the SD Creator program:

- 1) Once the program is installed it will place an icon labeled “SD Creator” on the desktop. Start the application by double clicking the icon.
- 2) Insert an SD card into the tester or card reader/writer and select the drive letter corresponding to the SD card **(Item 1)**.
- 3) Enter the support email address, **“ODISsupport@vw.com” (Item 2)**.
- 4) Select the MirrorServer certificate by selecting “Select certificate...” **(Item 3)**.
- 5) Enter the MirrorServer address **(Item 4)** by using **“https://mirrorserver2.vwvhub.com”** (without quotes). Once set, the user can later verify this setting in the server section listed under the “settings” tab.
- 6) After entering the MirrorServer address a drop down menu will appear – select brand “Volkswagen.”

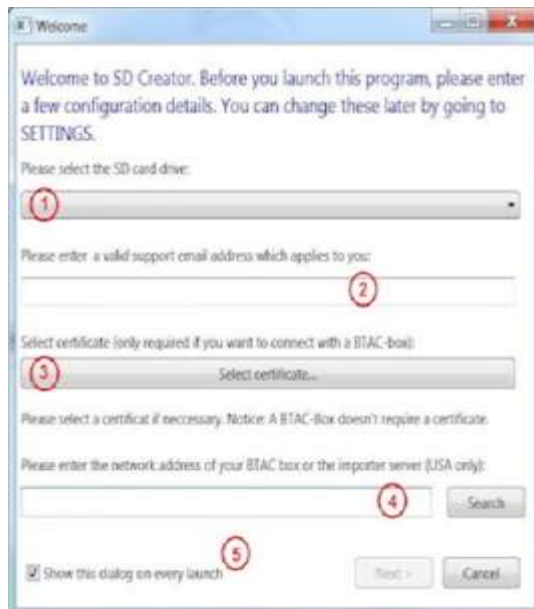





00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

Uncheck the box for “Show this dialog on every launch” (**Item 5**) and select “Next”.

**Support requests by e-mail:**

- When the “Support” button is pressed, an email will automatically be generated along with any error logs (also automatically attached). In the email, type a brief description of the error experienced and then send the email. The email will be sent to the Volkswagen ODIS support team.



**5. Using the SD Creator to download the software update files:**




The SD creator only references using an SD card. A USB device can be used in place of an SD Card.

- 1) The unique SD card or USB device part number from a software update Technical Bulletin must be entered.
- 2) Enter this part number into the “Part number” field (with no spaces or dashes).
- 3) Click “Search” button.
- 4) The program will automatically find the software files on the MirrorServer, if entered correctly.
- 5) Click on “Play/Start” button.



If the “Play/Start” button is not active, check the “path” field for the matching drive letter where the SD card is inserted.

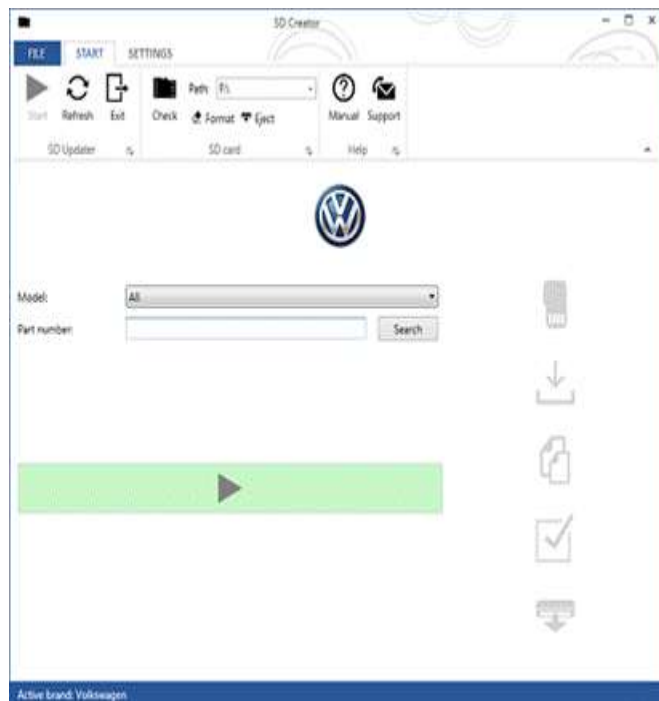




 **Tip:**


The SD card or USB device should always be prepared using the SD Creator in advance, prior to starting the software update in a vehicle.

**6. SD Creator download process:**

1) The program will first check the speed of the SD card and then will format the SD Card.

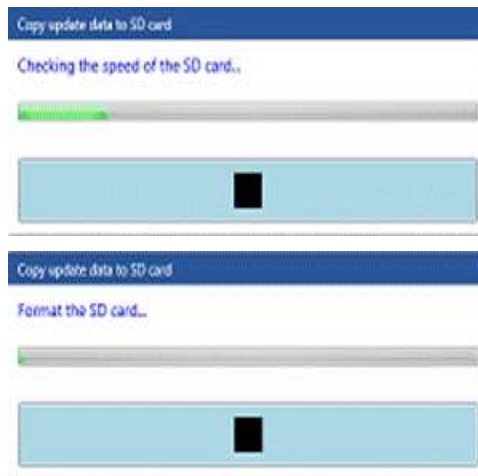

2) Next the program will start the download of software files from the MirrorServer and save them on the local hard drive. If the internet connection is interrupted during the download, then any of the files can become corrupted. If this happens the entire process will need to be started over, beginning with the part number entry – **Step 5**.

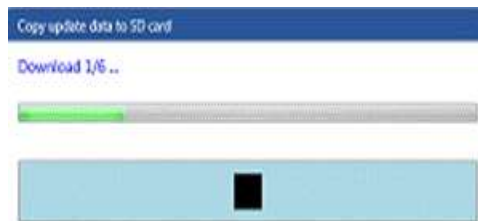

3) The SD Creator will attempt to eject the SD card. Sometimes this fails. If this happens, manually eject the card from the ODIS machine, using the Windows function to “Safely Remove” media.



4) From this point the SD card is ready to use to perform a software update.



00-19-04 - Set-up SD Creator to Obtain Software Updates

Release date: 10/24/2022

---

## Warranty

Information only.

## Required Parts and Tools

No Special Parts required.

Tool Description	Tool No:
VAS Diagnostic Tool	VAS 6150/X & VAS 6160/X with ODIS Service with current online updates

## Additional Information

All part and service references provided in this Technical Bulletin are subject to change and/or removal. Always check with your Parts Dept. and Repair Manuals for the latest information.