

DP14-004

CHRYSLER

9/15/2014

LEGALS AND CUSTOM  
COMPLAINTS PUBLIC

8R

PHOTOS ANC CDR REPORT

ECU Details Summary Information

CCN

Name	Value
VIN (Original)	2A8HR44H38R [REDACTED]
VIN (Current)	2A8HR44H38R [REDACTED]
ECU Part Number	56044887AH
Software (Code) Part Number	05172130AF
Diagnostic Variant	06: CCN (RT, KK, JK, KA)
Diagnostic Version	05
Software Version (Major/Middle/Minor)	00 05 22
Hardware Version (Major/Minor)	05 08
Production/Development Status	Production
Supplier ID	Siemens
Model Year	08
Vehicle Line	RT
Body Style	Station Wagon
Country Code	USA
Serial Number	TKYQI006 [REDACTED]
ECU File Name	CCN/CCN/06
ECU Database ID	3964

HVAC

Name	Value
VIN (Original)	2A8HR44H38R [REDACTED]
VIN (Current)	2A8HR44H38R [REDACTED]
ECU Part Number	55111805AF
Software (Code) Part Number	55111805AF
Software Version (Major/Middle/Minor)	04 00 24
Hardware Version (Major/Minor)	02 00
Variant ID	05: Single, Dual and 3 Zone Control - TRW
Diagnostic Version	05
Supplier ID	TRW
Vehicle Line	RT
Model Year	08
Body Style	Station Wagon
Country Code	USA
Production / Development Switch	Production
ECU File Name	HVAC/HVAC/05
ECU Database ID	4283

ORC

Name	Value
VIN (Original)	2A8HR44H38R [REDACTED]
VIN (Current)	2A8HR44H38R [REDACTED]
ECU Part Number	05094018AK



Odometer: 57890.5 miles

Name	Value
Software (Code) Part Number	00072400AA
Software (Data) Part Number	00071700AB
Software Version (Major/Middle/Minor)	07 24 00
Hardware Version (Major/Minor)	07 13
Variant ID	03: ORC - CAN C (DPRS) / ORC-CM - CAN C
Diagnostic Version	03
Production / Development Status	Production
Model Year	08
Vehicle Line	RT
Body Style	Station Wagon
Country Code	USA
ECU File Name	ORC/ORC/03
ECU Database ID	4215

**RADIO**

Name	Value
VIN (Current)	2A8HR44H38R [REDACTED]
VIN (Original)	2A8HR44H38R [REDACTED]
ECU Part Number	05064411AF
Serial Number	T41AH018883371
Hardware Version (Major/Minor)	41 35
Software Version (Major/Middle/Minor)	08 06 20
Variant ID	02: NTG4
Diagnostic Version	02
Supplier ID	Siemens VDO
Model Sales Code	RES
SDAR Receiver Subscription	True
ECU File Name	RADIO/RADIO/02
ECU Database ID	4294

**TIPMCGW**

Name	Value
VIN (Current)	2A8HR44H38R [REDACTED]
VIN (Original)	2A8HR44H38R [REDACTED]
ECU Part Number	56049720AS
Software (Code) Part Number	04692250AI
Serial Number	TR1JC0148B1129
Software Version (Major/Middle/Minor)	05 36 00
Hardware Version (Major/Minor)	01 01
Diagnostic Version	12
Diagnostic Variant	05: CGW (TIPM7)
Development/Production Status	Production
Supplier ID	Motorola
Gateway ECU	True




Odometer: 57890.5 miles

Name	Value
ECU File Name	TIPMCGW/TIPMCGW/05
ECU Database ID	4181

WCM

Name	Value
VIN (Original)	2A8HR44H38R [REDACTED]
Model Year	08
Vehicle Line	RT
Body Style	Station Wagon
Country Code	USA
ECU Part Number	05026147AG
Software (Code) Part Number	0555552AE
Software Version (Major/Middle/Minor)	08 00 02
Hardware Version (Major/Minor)	06 00
Variant ID	WCM Variant (04)
Diagnostic Version	03
Supplier ID	Siemens
SKIM	Present
RKE	Present
CAN-C Hardware	Present
ECU File Name	WCM/WCM/04
ECU Database ID	3783

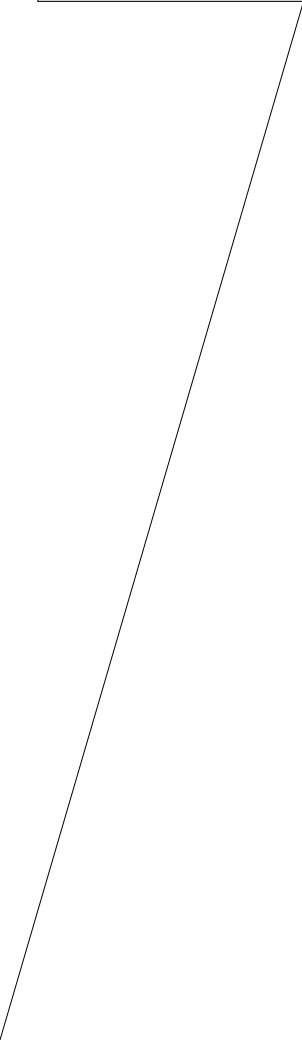

Vehicle Information: 2008 RT 3.3L 2A8HR44H38R [REDACTED]



Publication Date: Wed May 1 2013  
Page 1

Odometer: 57890.5 miles

Loss of Comm Summary Information

ECU	Active	Stored	Logging ECUs
-----	--------	--------	--------------

Vehicle Information: 2008 RT 3.3L 2A8HR44H38R [REDACTED]

Odometer: 57890.5 miles



Loss of Comm Enabling Conditions


Name	Value	undefined
Ignition Status	RUN Position	false
Battery/Ignition DTC's	Yes	true
VIN Mismatch DTC	No	false
ECU Config DTC	No	false
CAN Electrical DTC's	No	false
CAN Signal DTC's	No	false





ECU Summary Information

ECU	Name	Original VIN	Current VIN	Flash Part Number	Software Part Number	S/W Version	H/W Version	Variant	Version	Bus Type	Country Code
PCM										CAN C	
ABS										CAN C	
ORC	Occupant Restraint	2A8HR44H38R [REDACTED]	2A8HR44H38R [REDACTED]	05094018AK	05094018AK	07.24.00	07.13	03	03	CAN C	USA
WCM	Wireless Control	2A8HR44H38R [REDACTED]	????????????????	0555552AE	05026147AG	08.00.02	06.00	04	03	CAN C	USA
CCN	Instrument Cluster/Cabin Compartment Node	2A8HR44H38R [REDACTED]	2A8HR44H38R [REDACTED]	05172130AF	56044887AH	00.05.22	05.08	06	05	CAN IHS	USA
HVAC	Heat, Ventilation and A/C	2A8HR44H38R [REDACTED]	2A8HR44H38R [REDACTED]	55111805AF	55111805AF	04.00.24	02.00	05	05	CAN IHS	USA
RADIO	RADIO	2A8HR44H38R [REDACTED]	2A8HR44H38R [REDACTED]	05064411AF	05064411AF	08.06.20	41.35	02	02	CAN IHS	USA
SAS										CAN C	
TIPMCGW	Central Gateway	2A8HR44H38R [REDACTED]	2A8HR44H38R [REDACTED]	04692250AI	56049720AS	05.36.00	01.01	05	12	DIAG CAN C	USA

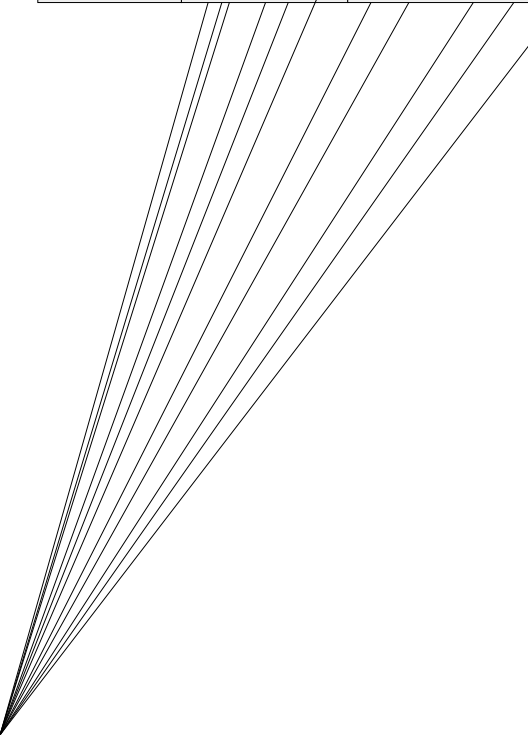



Vehicle Information: 2008 RT 3.3L 2A8HR44H38R [REDACTED]

Odometer: 57890.5 miles



Publication Date: Wed May 1 2013  
Page 2

### DTC Summary Information

ECU	DTC Code	Status	DTC Description
ORC	B210E	active	Battery Voltage High
HVAC	B102E	stored	Rear Blend Request Input Circuit Low
TIPMCGW	B2102	active	Ignition Run/Start Input Circuit High
TIPMCGW	P0073	active	Ambient Air Temperature Sensor Circuit High

Environmental Data Summary Information

ORC | B210E | active | Battery Voltage High

Name	Value	Units
DTC Readiness Flag	Complete	
DTC Storage State	Active	
Warning Indicator Request State	On	
Occurrence Flag	Fault	
Original Odometer	52772	miles
Most Recent Odometer	57882	miles
Frequency Counter	255	
Operation Cycle Counter	0	

HVAC | B102E | stored | Rear Blend Request Input Circuit Low

Name	Value	Units
DTC Readiness Flag	Complete	
DTC Storage State	Stored	
Warning Indicator Request State	Off	
Odometer	52787.6	miles
Accumulation Timer	4947	minutes
Ignition Key Cycles	0	cycles

TIPMCGW | B2102 | active | Ignition Run/Start Input Circuit High

Name	Value	Units
Reserved	Undefined	
DTC Readiness Flag	Complete	
DTC Storage State	Active	
Warning Indicator Request State	Off	
Odometer	57889.8	miles
Accumulation Timer	14	minutes
Ignition Key Cycles	0	

TIPMCGW | P0073 | active | Ambient Air Temperature Sensor Circuit High

Name	Value	Units
------	-------	-------

Vehicle Information: 2008 RT 3.3L 2A8HR44H38R [REDACTED]

Odometer: 57890.5 miles



Name	Value	Units
Reserved	Undefined	
DTC Readiness Flag	Complete	
DTC Storage State	Active	
Warning Indicator Request State	Off	
Odometer	57889.8	miles
Accumulation Timer	15	minutes
Ignition Key Cycles	0	

IMPORTANT NOTICE: Robert Bosch LLC and the manufacturers whose vehicles are accessible using the CDR System urge end users to use the latest production release of the Crash Data Retrieval system software when viewing, printing or exporting any retrieved data from within the CDR program. Using the latest version of the CDR software is the best way to ensure that retrieved data has been translated using the most current information provided by the manufacturers of the vehicles supported by this product.

## CDR File Information

User Entered VIN	2A8HR44H38R [REDACTED]
User	J Bielenda
Case Number	Partain
EDR Data Imaging Date	05/01/2013
Crash Date	
Filename	2A8HR44H38R722007_ACM.CDRX
Saved on	Wednesday, May 1 2013 at 15:20:47
Collected with CDR version	Crash Data Retrieval Tool 10.1
Reported with CDR version	Crash Data Retrieval Tool 12.2
EDR Device Type	Airbag Control Module
Event(s) recovered	None

## Comments

2008 Chrysler T&C  
Direct Image  
P21570R16

## Data Limitations

### AIRBAG CONTROL MODULE (ACM) DATA LIMITATIONS:

#### GENERAL INFORMATION:

CAUTION: During Bench top imaging, make sure the ACM is not moved, tilted or turned over while connected to and powered by the CDR Interface Module. Also, after a CDR imaging process, wait 2 minutes after power is removed from the ACM before attempting to move the module. Not following these general ACM guidelines for bench top imaging could cause new events to be recorded in the ACM.

The ACM current fault status will be altered if the ACM is powered-up without having all of the other vehicle inputs connected (e.g., bench top imaging). This situation will occur when the CDR tool is connected directly to the ACM. This will not affect the stored fault data information in any of the Event Records. Always make a note in the CDR case comments section when an ACM bench top imaging process is being performed.

The recorded Event will contain Pre-Crash data.

- T0 (where '0' is subscript) (-0.1 sec.) is defined as either:
  - The last sample point in the vehicle data buffer when the ACM commanded a deployment
  - The algorithm wakeup.
  - Please note that the algorithm wakeup may be different for front, side, and roll-over events and their associated parameters.
- The VIN is captured by the ACM and then recorded as the Original VIN after 10 consecutive ignition cycles of capturing the same number. Once it has been recorded, this number cannot be modified.
- As the VIN may be used to determine the configuration of the restraint system, it is imperative that the correct VIN be entered into the CDR software during the imaging process.

#### CDR FILE INFORMATION:

Event(s) Recovered definitions:

- None - There are no stored events in the Airbag Control Module (ACM)
- Not Retrievable - Event Data may be stored in the ACM but is not retrievable by the CDR tool.
- For Continental ACMs:
  - Event Record 1 - Data from an event is stored in the ACM (not necessarily in chronological order)
  - Event Record 2 - Data from another event is stored in the ACM (not necessarily in chronological order)
  - Event Record 3 - Data from another event is stored in the ACM (not necessarily in chronological order) (for modules with 3 stored events)
- For all other ACMs:
  - Most Recent Event - Data of the most recent event is displayed in the report
  - 1st Prior Event - Two events are stored in the ACM, Data displayed is of the first prior event.
  - 2nd Prior Event - Three events are stored in the ACM, Data displayed is of the second prior event.

- Etc., (for modules with 3 to 5 stored events)

#### CDR RECORD INFORMATION:

- The following table provides an explanation of the sign notation for data elements that may be included in this CDR report.

Data Element Name	Positive Sign Notation Indicates
Longitudinal Acceleration	Forward
Delta-V, Longitudinal	Forward
Maximum Delta-V, Longitudinal	Forward
Lateral Acceleration	Left to Right
Delta-V, Lateral	Left to Right
Maximum Delta-V, Lateral	Left to Right
Normal Acceleration	Upward
Vehicle Roll Angle	Left to Right Rotation

- If power to the ACM is lost during an event, all or part of the event data record may not be recorded. Two scenarios may be recorded under this condition:
  - "None" may be displayed in the "Event(s) Recovered" section of the report indicating no pre-crash vehicle data.
  - An event may be displayed in the "Event(s) Recovered" section of the report and "Interrupted" will be displayed for Vehicle Event Recorder Status.
- Note: For the 2010-2012 MY Dodge Journey, Dodge Grand Caravan, Fiat Freemont, Chrysler Town and Country, and Chrysler Grand Voyager, and Lancia Grand Voyager, "interrupted" in Vehicle Event Recorder Status/Event Recorder Status indicates either be a non-deployment event or an interrupted deployment event.
- For ACMs that store non-deployment events, the minimum delta V required to store an event is a delta V of 5 mph (8 km/h) within a 150 ms interval.
- Definitions for Data Blocks 1 - 7 and Overall Data Record Complete:
  1. Crash Record (system status and DTCs)
  2. NHTSA Table #1 Vehicle System data
  3. NHTSA Table #1 Longitudinal delta-V
  4. NHTSA Table #2 Vehicle System Data
  5. NHTSA Table #2 Lateral delta-V - will be a NO if vehicle is not equipped with side sensing
  6. ACM angular rate data - will be a NO if vehicle is not equipped with roll-over sensing
  7. Other Vehicle System Data - Chrysler Specific Data
 Overall Data Record Complete - Yes, No is defined based on the specific vehicle configuration. For example, a NO may be present for a non-applicable data block but a YES may be present for overall data record complete as all of the applicable data is complete.
- For non-NAFTA ACMs that control pedestrian protection devices, a non-deployment event will be also stored when the pedestrian protection devices are activated.
- The Airbag Control Module Configuration indicates the inputs and outputs that the ACM for a particular vehicle monitors and/or controls.
- "Event Number" in the System Status at Event section of the report:
  - Indicates the event number per vehicle ignition cycle for:
    - 2010 - 2012 Sebring, Avenger, Caliber, Nitro, Compass, Liberty, Patriot, Wrangler, and Ram
    - Indicates the overall order of the events for all other applicable vehicles.
- "Total Number of Events Recorded" in the System Status at Event section of the report:
  - Stops incrementing when each event record is recorded by the ACM for:
    - 2010 - 2012 Sebring, Avenger, Caliber, Nitro, Compass, Liberty, Patriot, Wrangler, and Ram
    - Indicates the total number of events that the ACM has recorded for all other applicable vehicles.
- "Operation System Time at Event (min)" in the System Status at Event section of the report is a lifetime timer for the ACM. It indicates the total amount of time the ACM has been powered up.
- "Time from Event 1 to 2 (sec)" in the System Status at Event section of the report indicates the time from t0 of the first event to t0 of the second event. If the value is greater than 5 seconds, ">5" will be displayed.
- Active Head Restraint (AHR) - This refers to the active head restraint systems that are electronically controlled by the ACM.
- For applicable vehicles, a "Yes" for a particular item in the Deployment Command Data section of the report indicates that the ACM commanded the deployment of the associated device. Note: For 2010 MY vehicles equipped with AHR, the AHR deployment will not be recorded in the EDR.
- Pre-Crash data from the various electronic control modules in the vehicle is transmitted to the Airbag Control Module via the vehicle's communication network.
- On 2006-2009 Ram 2500/3500, the Engine RPM recorded is limited to a maximum of 4080 RPM. On the 2008 - 2010 Dodge Grand Caravan, 2008-2010 Chrysler Town and Country and 2009-2010 Dodge Journey, the engine RPM resolution is 256 rpm. On all other vehicles, the resolution is 32 rpm.
- If a recorded event has Engine RPM equal to SNA and Speed, Vehicle Indicated equals SNA for each time stamp, then the data is default data and the event stored in the ACM is not valid.
- The accuracy of the recorded Speed, Vehicle Indicated will be affected if the vehicle had the tire size or the final drive axle ratio changed from the factory build specifications.

- Speed, Vehicle Indicated is reported as an average of the drive wheels.
- On the 2008 - 2009 Dodge Grand Caravan, 2008-2009 Chrysler Town and Country and 2009 Dodge Journey, the vehicle speed resolution is 2 kph. On all other vehicles, the resolution is 1 kph.
- The MIL (Malfunction Indicator Lamp) Status for the various recorded systems indicates the state of the applicable malfunction indicator lamp at the time that the data was captured. Note: Some fault codes could be stored due to component/system damage from the accident.
- For correct polarity of Maximum Delta-V Longitudinal or Maximum Delta-V Lateral, reference the graph and the table of Delta-V values.
- On vehicles equipped with ETC, "Accelerator Pedal, % Full" and "Engine Throttle, % Full" are relative values - relative pedal position and relative engine throttle. These parameters may record values of less than 100% when the pedal/throttle is actually at its maximum. (Max. ~ 77%)

NOTE: The appropriate diagnostic tool should be used to read any stored Diagnostic Trouble Codes (DTC's) in the various electronic modules (ACM, PCM, ABS, TCM, etc., where applicable) for use in interpretation of some vehicle specific recorded data.

#### VEHICLE DATA DEFINITIONS:

Vehicle Event Recorder Status definitions:

- For additional definitions, please refer to the CDR Help File Glossary
- ABS MIL (if equip.) - This indicates the ABS fault indicator lamp status. It will only be "On" when there is a fault in the ABS system. The Electronic brake module DTC's should be read and recorded for final system interpretation.
- ESP MIL (if equip.) - This indicates the ESP/BAS fault indicator lamp status. It will only be "On" when there is a fault or thermal model shutdown in the ESP system. The ESP module DTC's should be read and recorded for final system interpretation.
- ESP Lamp (if equip.) - This is the status of the ESP symbol - "car with squiggly lines" indicator lamp. "On" indicates ESP has been turned off by the driver or has reduced performance and is not an indication of a fault in the system.
- ESP Lamp Flashing Requested (if equip.) - If "Yes", then an ESP, Traction Control or Trailer Sway Control (if equipped) event was active at the time of data capture.
- ESP Disabled (if equip.) - "Yes" indicates that ABS & ESP have been disabled by the driver or due to system performance.
- ESP Functional/Active (if equip.) - "YES" indicates that the ESP system is functional and has no faults.
- Panic Brake Assist Active (if equip.) - "Yes" indicates that all four of the brake circuits are under going ABS control.
- Steering Input (deg) (if equip.):
- Steering Input polarity is positive for right turns on:
  - 2006 - 2007 Grand Cherokee
  - 2006 - 2007 Commander
  - 2005 - 2010 300, Magnum, and Charger
  - 2008 - 2010 Challenger
- Steering Input polarity is negative for right turns on:
  - All other vehicles and model years not specified above
- Yaw Rate (deg/sec) (if equip.): All vehicles have negative yaw rate when making a right turn.
- ETC Lamp - Lamp "ON" indicates there is an active Electronic Throttle DTC.
- ETC Lamp Flashing - If "Yes", then the ETC is in the limp-in mode.
- Engine Torque Applied - If "No", then no engine torque output was applied (as in Park/Neutral for Automatic transmissions or clutch depressed on manual or during an ESP/Traction Control event). If "Yes", then engine torque output was applied.
- Tire 1 (2) Location (if equip.) - This indicates the location of the tire pressure sensor data. Default is used to indicate that the location of the tire pressure sensor is unknown or there is no tire pressure sensor in the wheel. Vehicles with Base Tire Pressure Monitoring systems will display SNA for both Tire Locations as these vehicles do not send actual pressure values across the communication bus.
- Tire 1 (2) Pressure Status (if equip.) - This indicates the actual pressure status of the Tire Location defined in the previous column. Possible values are LOW, NORMAL, HIGH, or SNA for this parameter. Vehicles with Base Tire Pressure Monitoring systems will display NORMAL even though these vehicles do not send actual pressure values across the communication bus.
- Tire 1 (2) Pressure (psi) (if equip.) - This indicates the actual tire pressure value of the Tire Location defined. Vehicles with Base Tire Pressure Monitoring systems will display N/A for this parameter as these vehicles do not send actual pressure values across the communication bus.
- Cruise Control System - "On" indicates that the Cruise Control system is turned on.
- Cruise Control Active - "Yes" indicates the Cruise Control system is actively controlling vehicle speed. "No" indicates the system is NOT controlling vehicle speed.
- (if equip.) - If a parameter name is followed by the words (if equip.), then the parameter is only valid for vehicles equipped with the associated parameter/vehicle system.

#### APPLICATION INFORMATION:

- 2005 - 2009 Durango's equipped with side airbags have EDR data that can be imaged by the CDR tool. Durango's not equipped with side airbags have EDR Data that might be imaged by the CDR tool and may be imaged by the supplier.
- For 2005 & 2006 MY, some Chrysler 300, Dodge Magnum, Dodge Charger, Jeep Grand Cherokee, and Jeep Commander models may contain EDR data that can not be imaged by the CDR tool but may be imaged by the supplier.

- For 2006 & 2007 MY, some PT Cruiser models may contain EDR data that can not be imaged by the CDR tool.
- EDR Data is only recorded for frontal deployments in the following vehicles:
  - 2005-2007 Durango
  - 2006-2007 Ram 1500
  - 2006-2009 Ram 2500/3500 Heavy Duty
  - 2007 Aspen, Caliber, Compass, Patriot, Nitro, Sebring, Wrangler

03001\_Chrysler\_r013

### System Status at Retrieval

Original VIN	2A8HR44H38R
Airbag Control Module Part Number	05094018AK
Airbag Control Module Serial Number	T15JF0238091YLa
Airbag Control Module Supplier	Continental Corporation

### System Configuration at Retrieval

Configured for Driver Seatbelt Switch	No
Configured for Front Center Seatbelt Switch	No
Configured for Front Passenger Seatbelt Switch	Yes
Configured for 2nd Row Left Seatbelt Switch	No
Configured for 2nd Row Center Seatbelt Switch	No
Configured for 2nd Row Right Seatbelt Switch	No
Configured for 3rd Row Left Seatbelt Switch	No
Configured for 3rd Row Center Seatbelt Switch	No
Configured for 3rd Row Right Seatbelt Switch	No
Configured for Driver Knee Airbag	No
Configured for Left Curtain #1	Yes
Configured for Right Curtain #1	Yes
Configured for Left Curtain #2	No
Configured for Right Curtain #2	No
Configured for Front Driver Seatbelt Pretensioner	Yes
Configured for Front Center Seatbelt Pretensioner	No
Configured for Front Passenger Seatbelt Pretensioner	Yes
Configured for 2nd Row Left Seatbelt Pretensioner	No
Configured for 2nd Row Center Seatbelt Pretensioner	No
Configured for 2nd Row Right Seatbelt Pretensioner	No
Configured for 3rd Row Left Seatbelt Pretensioner	No
Configured for 3rd Row Center Seatbelt Pretensioner	No
Configured for 3rd Row Right Seatbelt Pretensioner	No
Configured for Left Side Sensor #1	Yes
Configured for Left Side Sensor #2	Yes
Configured for Left Side Sensor #3	Yes
Configured for Right Side Sensor #1	Yes
Configured for Right Side Sensor #2	Yes
Configured for Right Side Sensor #3	Yes
Configured for Left Up Front Sensor	Yes
Configured for Right Up Front Sensor	Yes
Configured for Front Driver Digressive Load Limiter	No
Configured for Front Passenger Digressive Load Limiter	No
Configured for Driver Seat Track Position Sensor	Yes
Configured for Front Passenger Seat Track Position Sensor	Yes
Configured for Driver Airbag Disable Switch	No
Configured for Passenger Airbag Disable Switch	No
Configured for Front Passenger Occupant Classification System	No
Configured for Right Side Thorax	No
Configured for Left Side Thorax	No
Configured for Passenger Knee Airbag	No
Configured for Passenger Belt Tension Sensor	No
Configured for Driver Belt Tension Sensor	No
Configured for Occupant Detection Sensor	No
Configured for DOC Disable Switch	No



### Hexadecimal Data

Data that the vehicle manufacturer has specified for data retrieval is shown in the hexadecimal data section of the CDR report. The hexadecimal data section of the CDR report may contain data that is not translated by the CDR program. The control module contains additional data that is not retrievable by the CDR system.

5A 87 03 79 03 03 FF 07 13 07 24 00 30 35 30 39 34 30 31 38 41 4B

5A 88 32 41 38 48 52 34 34 48 33 38 52 37 32 32 30 30 37

5A 90 32 41 38 48 52 34 34 48 33 38 52 37 32 32 30 30 37

61 0D FF

61 E1 54 31 35 4A 46 30 32 33 38 30 39 31 59 4C

61 EA 04 98 02 FF C0 D3 C0

71 02 01 00 FF

71 02 01 01 FF

71 02 01 02 FF

71 02 01 03 FF

71 02 01 04 FF

71 02 01 05 FF

71 02 01 06 FF

71 02 01 07 FF

71 02 01 08 FF

71 02 01 09 FF

71 02 01 0A FF

71 02 01 0B FF

71 02 01 0C FF

71 02 01 0D FF

71 02 01 0E FF

71 02 01 0F FF









FF  
FF  
FF  
FF  
FF  
FF  
FF FF FF FF FF FF FF FF

71 EC 06 A1 0E 60 A1 0E 60 A2 07 20 A1 0D 20 C1 72 20 C1 75 20 00 00 00 00 00 00

71 EF 01 A1 0E 60 00 14 BC

71 EF 01 A1 0E 60 00 14 BC

71 EF 03 A2 07 20 00 13 A1

71 EF 04 A1 0D 20 00 FF FF

71 EF 05 C1 72 20 00 00 00

71 EF 06 C1 75 20 00 00 00

00 00 00 00 00 00 00 00

00 00 00 00 00 00 00 00

### Disclaimer of Liability

The users of the CDR product and reviewers of the CDR reports and exported data shall ensure that data and information supplied is applicable to the vehicle, vehicle's system(s) and the vehicle ECU. Robert Bosch LLC and all its directors, officers, employees and members shall not be liable for damages arising out of or related to incorrect, incomplete or misinterpreted software and/or data. Robert Bosch LLC expressly excludes all liability for incidental, consequential, special or punitive damages arising from or related to the CDR data, CDR software or use thereof.










10393 19  
10/10/11  
A.S.P.

CALIBER

















TOWN & COUNTRY

BLUE RIBBON  
MINI VAN  
CHRYSLER













TOWN & COUNTRY

ALAN BRACK























