



HYUNDAI

Technical Service Bulletin

GROUP ENGINE	NUMBER 21-EM-004H
DATE MARCH 2021	MODEL(S) APPLICABLE VEHICLES BELOW




SUBJECT: BEARING CLEARANCE TEST SERVICE PROCEDURE

Description: This bulletin provides the service procedure for engine connecting rod bearing clearance testing. Perform the procedure outlined in this bulletin to fulfill the Bearing Clearance Test inspection requirements to determine next required steps.



Applicable Vehicles:

- Certain models as indicated per separate TSB.
- This TSB fulfills its Inspection Procedure requirements for the engine Bearing Clearance Test.

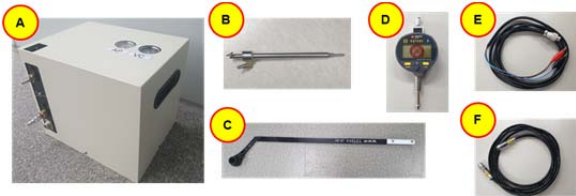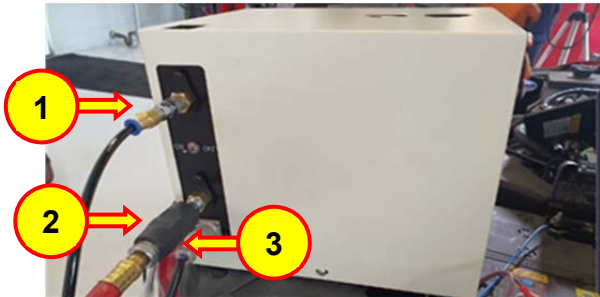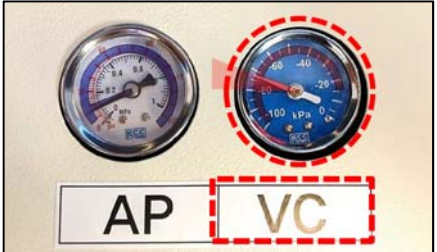SST Information

Part Name	Part Number / Figure	Note
BEARING CLEARANCE TESTER SET (BEARING TOOL)	  <p>(1) TEST HOSE (2) MAIN HOSE (3) POWER SUPPLY CABLE</p> <p>One BEARING CLEARANCE TESTER SET provided to dealers. (Additional units can be ordered.)</p>	<p>Confirm the following pressures meet requirements. The correct ranges for AP/VC air pressures are also indicated with red/blue decals on the gauges:</p> <p>Shop air supply: 50 psi minimum</p> <p>AP: 0.1 ~ 0.11MPa VC: -73 ~ -83Kpa (Refer to TSB 20-GI-009H or later for calibration procedure)</p> 
	KQ231-2T110QQH	BEARING CLEARANCE TESTER SET (BEARING TOOL) (includes A - F)
KQ231-2T100QQH	(A) BODY	


Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair

	<p>KQ231-2T101QQH</p> 	<p>(B) SPARK PLUG ROD (M12 for GD and Theta II MPI Hybrid engines)</p> <p>← Upper body portion is smooth with no grooves.</p>
	<p>KQ231-2T107QQH</p> 	<p>(B) SPARK PLUG ROD (M14 for MPI engines)</p> <p>← 2 machined identification grooves on upper body.</p>
	KQ231-2T102QQH	(C) CRANK ROTATOR TOOL
	KQ231-2T103QQH	(D) CLEARANCE GAUGE
	KQ231-2T104QQH	(E) POWER SUPPLY CABLE
	KQ231-2T105QQH	(F) TEST HOSE (AIR HOSE FOR CLEARANCE GAUGE)

Service Procedure: Bearing Clearance Test

1. Connect the main hose (shop air supply) and test hose to the bearing tool (with other end of the test hose disconnected). (The power to the bearing tool main unit is not necessary at this time.)


Confirm the shop air pressure and AP/VC pressures on the bearing tool meet requirements. The correct ranges for AP/VC air pressures are also indicated with red/blue decals on the gauges. Using STUI in the GDS, take and submit a picture of the gauges with the pressure levels clearly visible and the VIN in the background of the photo (RO or last 6 digits written on paper) for records.

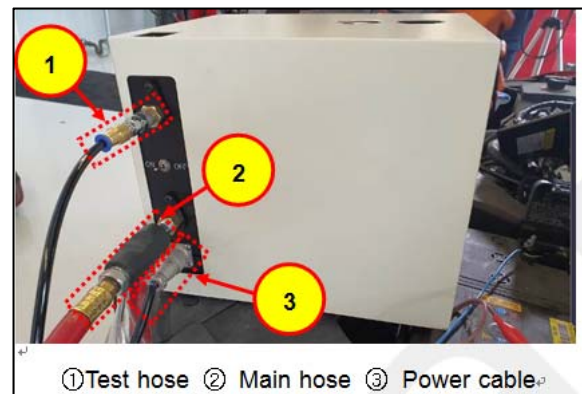

Shop air supply: 50 psi minimum

AP/VC air pressure calibration check:

- a) Connect the main air compressor hose.
- b) Connect the test hose. (The other end of the test hose should be left disconnected from the spark plug rod.)
- c) Confirm that the AP/VC toggle switch at top is in the middle position.
- d) Inspect the AP/C gauge indicators and compare to the specification range:
 - **AP:** 0.1 ~ 0.11MPa
 - **VC:** -73 ~ -83Kpa

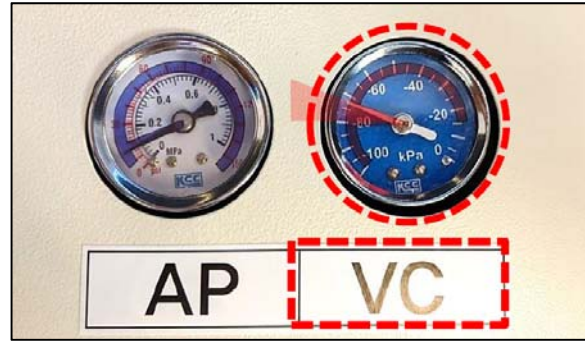**NOTICE**

Do not continue if any of the above readings are out of specification range.

- Adjust shop air to consistently provide at least 50 PSI of air pressure or greater.
- Do not use a portable air compressor to perform the bearing clearance testing.
- Be sure to check that the shop air water separator is functioning correctly.
- If any of the AP/VC air pressure indications are out of the specified range, recalibration of the Bearing Clearance Tester is required.
 - Refer to latest instructions outlined in the Engine Bearing Clearance Tester Calibration Procedure TSB 20-GI-009H or later for calibration procedure.

NOTICE

For Bearing Clearance Tester software related issues, contact GITA at: 888-437-0308
 For Bearing Clearance Tester hardware related issues, contact Techline at: 800-325-6604

2. Remove the engine cover and the 4 ignition coils.

Tightening Torque (ignition coils):
9.8 - 11.8 N·m
(1.0 - 1.2 kgf·m, 7.2 - 8.7 lb·ft)



3. Remove the 4 spark plugs.

Tightening Torque:
14.7 - 24.5 N·m
(1.5 - 2.5 kgf·m, 10.9 - 18.0 lb·ft)



4. Insert the appropriate (use **M12 for GDI and Theta MPI Hybrid** engines or **M14 for all other MPI** engines) spark plug rod SST (A) into Cylinder #1 spark plug hole and turn until hand tight. Insert the clearance gauge SST into the spark plug rod and tighten using the thumb screw.




NOTICE

DO NOT connect the test air hose to the clearance gauge at this time.

5. Connect the GDS to the vehicle and turn the ignition 'ON'.


6. Swipe up on the 'More' tab at the bottom of the GDS home screen. Select the 'Special Inspection' function.

7. Enter the vehicle info into the GDS as prompted then select 'Next'.

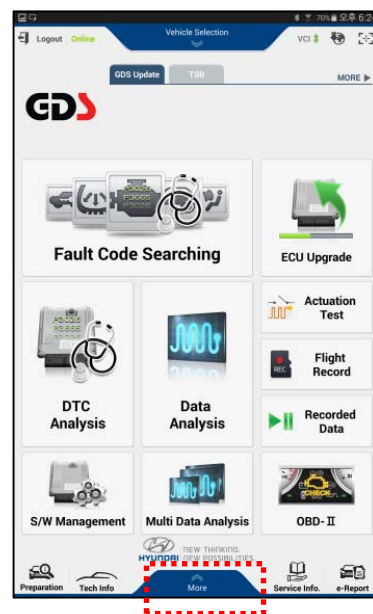

8. Connect the GDS to the clearance gauge SST (gauge) via Bluetooth:

- Press the “Set” button (B) on the gauge to turn it on.
- Press the “Set” (B) and “Mode” (C) buttons at the same time for about 4 sec until the “reset” message is displayed.
- Select the gauge in the list of devices on the GDS. Select the ‘Refresh’ icon (D) if the gauge doesn’t appear automatically.

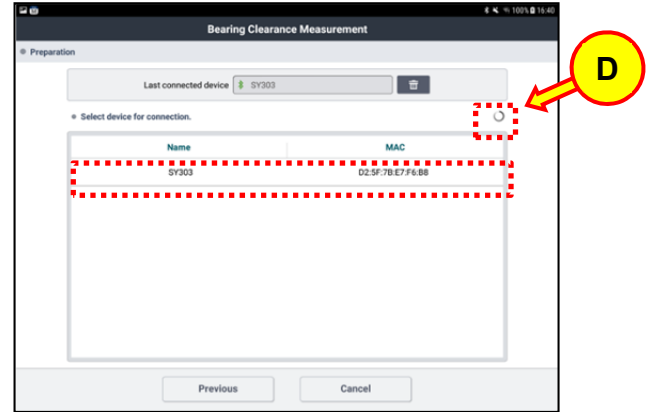


NOTICE

If more than one device appears in the list of devices, there is another device in range. Move away from the other device to pair the gauge.

- Check that the ball point tip (E) of the clearance gauge SST is securely installed to the tool as shown. **Do not continue if ball point tip (E) is loose or missing.**

NOTICE

If loose, apply Blue Loctite (or equivalent) to the tip thread and retighten securely to the gauge plunger.

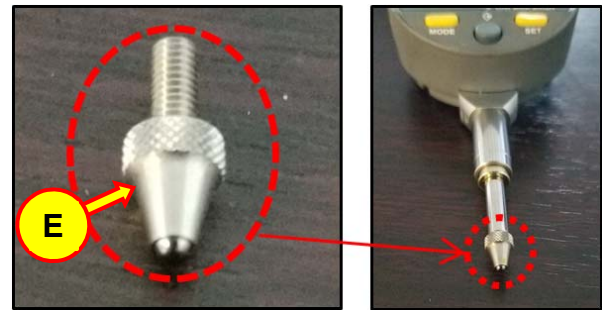

9. Turn the ignition ‘OFF’ and remove the VCI.

10. Follow the instructions on the GDS to start the test and select ‘Next’.

NOTICE

- For the following steps, the Crank Rotator Tool or a long handled wrench should be used for moving the crankshaft slowly and precisely.
- Ensure the test hose is disconnected from the clearance gauge when finding TDC piston depth.

Please take note of the following crank/piston position definitions.

- ❖ BTDC (Before Top Dead Center)
- ❖ TDC (Top Dead Center) ← Find TDC during the compression stroke.
- ❖ ATDC (After Top Dead Center)

In the following steps, the TDC point for testing must be at MAX (piston height) value minus 0.03mm as the crank has moved slightly into ATDC (from its TDC dwell point).

- If TDC is difficult to find, refer to **Shop Manual Section Location: Engine Mechanical System > Timing System > Timing Chain**

11. To find TDC compression (TDC), rotate the crankshaft with the crank rotator SST at least one cycle (1/2 turn). (If the SST does not fit the specific vehicle type, remove the front passenger wheel and wheel liner or underbody tray as needed to rotate the crankshaft using standard shop tools.)

IMPORTANT

- For the step below, the engine must be rotated **SLOWLY** using the crank rotator SST.
 - Abrupt or erratic movements may cause improper TDC setup and test errors.
- Do **NOT** stop rotating the engine before reaching **MAX TDC**, especially during the initial rotation towards TDC where the value may be at 0mm and change all the sudden.
 - Be sure to find TDC correctly by slowly and slightly nudging the engine a little more to verify no change in value to confirm that the piston is at **MAX TDC**.

- ❖ Monitor the piston height value on GDS screen or the clearance gauge SST while rotating the engine clockwise using the Crank Rotator Tool.
 - Rotate the engine **SLOWLY** as the value increases towards a MAX value. (BTDC → TDC)
 - When the value changes direction (increasing/BTDC → TDC → decreasing/ATDC), stop rotating the crank when the piston height is at MAX value minus 0.03mm.



NOTICE

The testing point is slightly towards **ATDC** from TDC when the piston has moved down **0.03mm** from its highest position.

12. Select 'Next' when TDC is found.
- ❖ Ideal set point for testing from TDC is found when the maximum value minus 0.03mm is reached on the clearance gauge SST (F).
 - ❖ The value is also displayed on the GDS.

13. Once the set point for bearing testing is found, select 'Start' in the GDS screen and proceed directly to the next step below.


- Do not turn the crank rotator SST until instructed to do so.



NOTICE

The value at TDC varies depending on the specific vehicle and engine type.

14. Connect the test hose (1) to the spark plug rod SST and to the bearing tool SST.

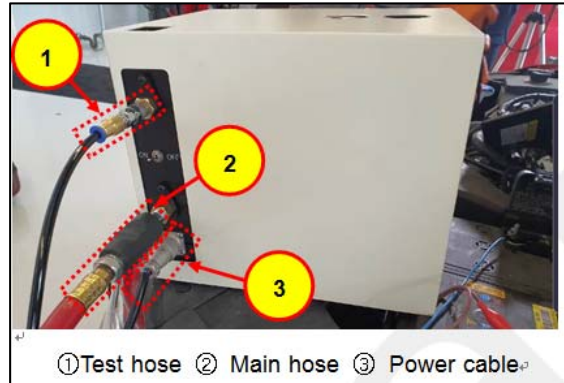

15. Connect the SST power cables to a fully charged 12V battery or to an external AC/DC power supply.

- Turn the bearing tool SST power switch 'ON'.



NOTICE

*** Bearing Tool SST Power Check ***



- a) Supply 12 volts (or an alternate external AC/DC 13.8 volt power supply with at least ~2 amp output) to the power cable (3) connected to the bearing tool SST.
- b) Turn power switch to ON.
- c) Toggle AP/VC transfer switch between AP <> VC.
 - ❖ The solenoids should "click" while switching between AP/VC when the unit is ON.
 - ❖ If the solenoids are not switching, then check the power cable or the power supply.

16. Locate the AP/VC switch on the bearing tool SST and switch it to the AP Position.

17. Follow the instructions on the GDS to test each cylinder. Cylinder #1 is checked first.

- The cylinders will be checked per the engine firing order: #1→#3→#4→#2.


18. On the bearing tool SST, change the AP/VC switch to the VC position when instructed by the GDS.

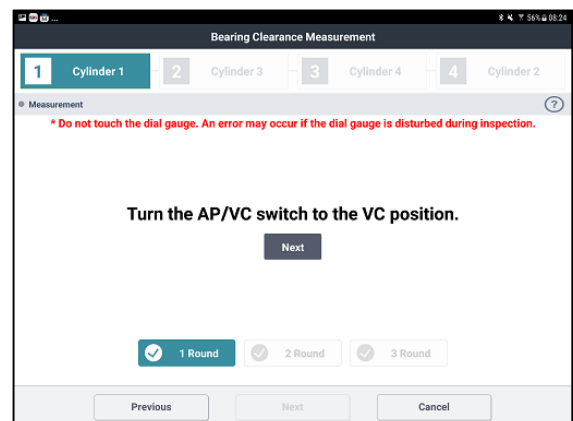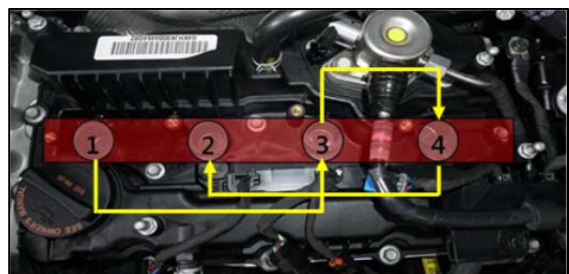


NOTICE

If the bearing measurement value does not change when the AP/VC is switched or the “Unable to measure” message appears on the GDS, rotate the crankshaft further as the exhaust valves could be open. Set the crankshaft to TDC again (Step 11).

Ensure the test hose is disconnected from the clearance gauge SST when finding TDC.

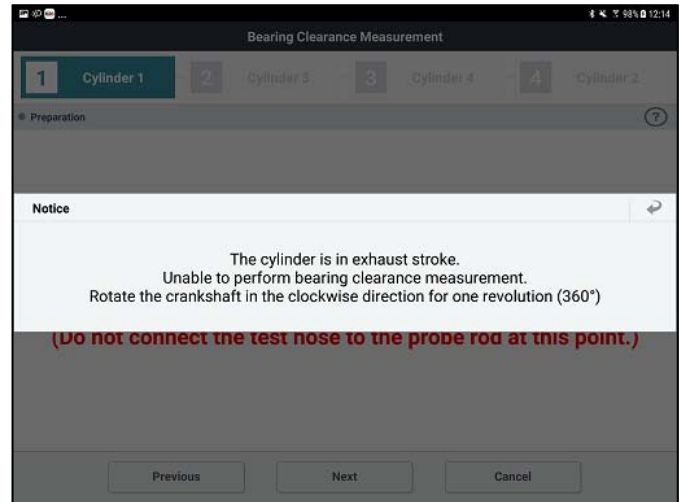


19. Continue following the instructions on the GDS to complete the bearing inspection. Check the engine oil level and select the level in the GDS.

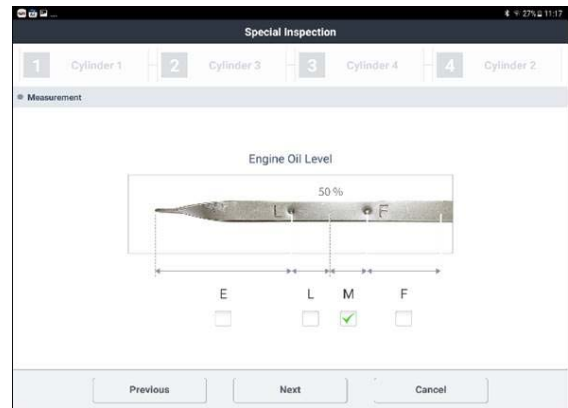


20. If the test result is “PASS”:

- Save a screenshot of the results screen.
- Reinstall all components in the reverse order of removal.
- Check for DTCs and perform the appropriate diagnostic service. Ensure no warning lights are present to complete the procedure.

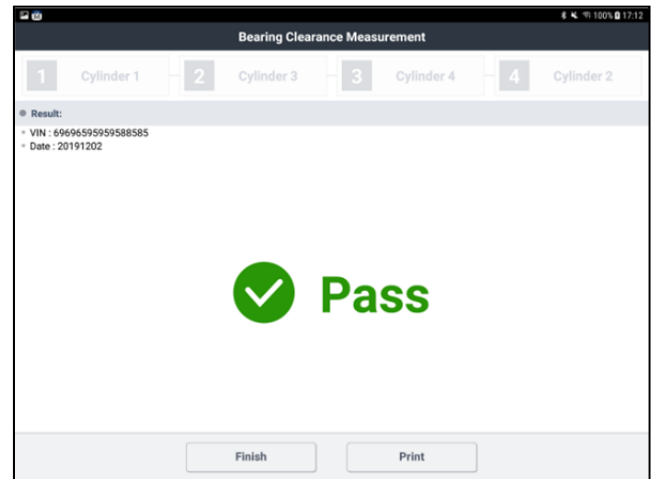

If the test result is “NO PASS”:

- a) Save a screenshot of the results screen.
- b) Submit PA for engine replacement approval.
- c) Follow remainder of the separate reference TSB to complete the service procedure.
- d) Check for DTCs and perform the appropriate diagnostic service. Ensure no warning lights are present to complete the procedure.

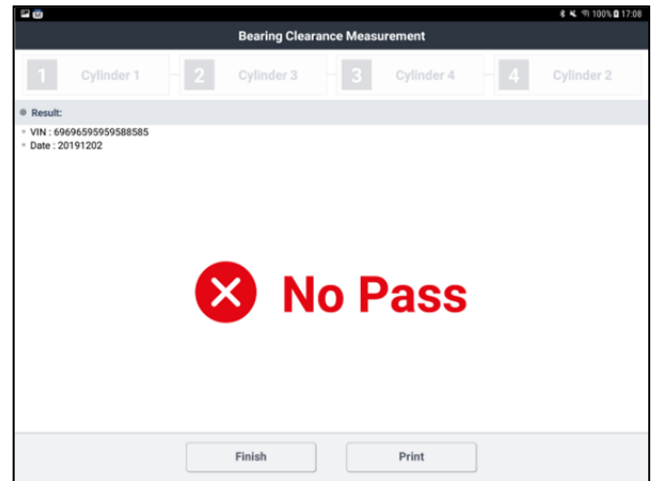**NOTICE**

PA Approval is required whenever an engine replacement is required. Submit PA and refer to the applicable Dealer Best Practices guide for the latest requirements for engine approval.