


This file represents a consolidation of multiple files sent by the manufacturer. Please use the bookmarks to navigate to each file. (Each bookmark label is the name of the original file.)

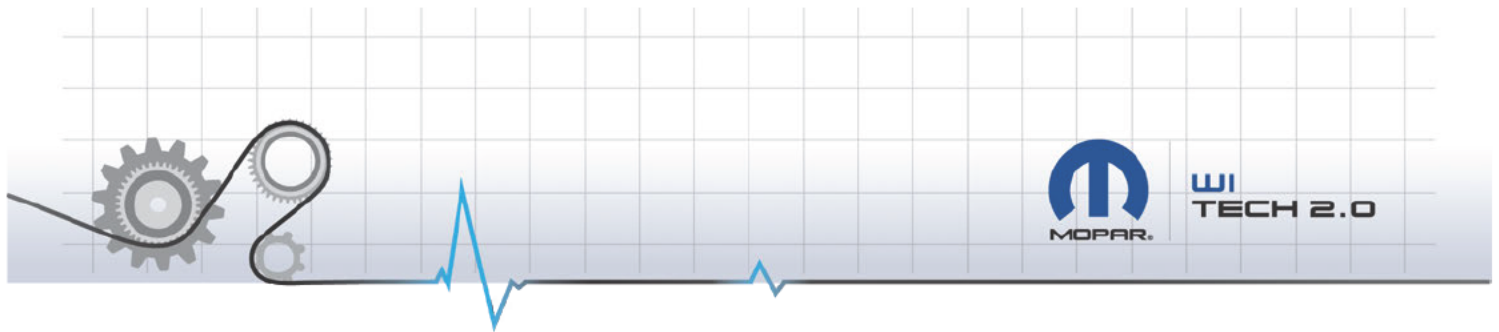

CONFIGURATION REPORT

Vehicle 2020 CHRYSLER PACIFICA (PHEV) 3.6L V6 HYBRID ENGINE
VIN 2C4RC1L7 [REDACTED]

Odometer 904.9 miles
Publication Date Feb 18, 2021, 11:29:33 AM

ECU SUMMARY INFO

ECU	NAME	BUS TYPE	FLASH PART #	CURRENT	ORIGINAL	PART #
PCM	Powertrain Control Module	CAN-C	68444229AE	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68444229AE
ICS	Integrated Center Stack	CAN-I	6UX601X8AA	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	6UX601X8AA
RFH	Radio Frequency Hub	CAN-C	68453559AB	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68453559AB
ESM	Electronic Shifter	CAN-C	68240089AM	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68240089AM
ORC	Occupant Restraint	CAN-C	68453076AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68453076AD
EPS	Electric Power Steering	CAN-C	68460392AA	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68460392AA
ANC	Active Noise Cancellation	CAN-I	68440556AB	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68440556AB
HVAC	Heat, Ventilation and A/C	CAN-I	68447893AC	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68447893AC
DDM	Driver Door Module	CAN-I	68424451AC	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68424451AC
PDM	Passenger Door Module	CAN-I	68424450AC	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68424450AC
DMRL	Door Module Rear Left	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68225096AG
DMRR	Door Module Rear Right	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68225096AG
PSDML	Power Sliding Doors (Left)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68369596AD
PSDMR	Power Sliding Doors (Right)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68369596AD
PLGM	Power Liftgate	CAN-I	68316094AF	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68316094AF
CSWM	Comfort Seat Wheel Module	CAN-I	68434910AC	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68434910AC
IPC	Instrument Panel Cluster	CAN-C	68434956AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68434956AD
PTS	Parktronics	CAN-C	68193772AJ	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68193772AJ
SCCM	Steering Column Control Module	CAN-C	68360889AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68360889AD
BCM	Body Controller	CAN-C	68424601AF	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68424601AF
RADIO	Radio	CAN-I	68461774AD	2C4RC1L7 [REDACTED]	2C4RC1L7 [REDACTED]	68461774AD

OCM	Occupant Classification	CAN-C	68403127AA	2C4RC1L		2C4RC1L	68403127AA
HVACR	Heat, Ventilation and A/C Rear	CAN-I	68373079AB	2C4RC1L		2C4RC1L	68373079AB
LBSS	Left Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L		2C4RC1L	04672786AB
RBSS	Right Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L		2C4RC1L	04672786AB
APM	Accessory Power Module	CAN-C	05185046AB	2C4RC1L		2C4RC1L	05185046AB
BPCM	Battery Pack Control Module	CAN-C	05193166AD	2C4RC1L		2C4RC1L	05193166AD
HCP	Hybrid Control Processor	CAN-C	05190289AC	2C4RC1L		2C4RC1L	05190289AC
OBCM	On Board Charging Module	CAN-C	05185047AE	2C4RC1L		2C4RC1L	05185047AE
DSM	Display Screen Module	CAN-I	68316175AC	2C4RC1L		2C4RC1L	68316175AC
RCCC	Rear Cabin Comfort Controls	CAN-I	6WL30DX9AA	2C4RC1L		2C4RC1L	6WL30DX9AA
EAC	Electric A/C Compressor	CAN-C	68237995AG	2C4RC1L		2C4RC1L	68237995AG
AHCP	Auxiliary Hybrid Control Processor	CAN-C	05190290AC	2C4RC1L		2C4RC1L	05190290AC
EBBM	Electronic Brake Booster Module	CAN-C	68461813AB	2C4RC1L		2C4RC1L	68461813AB
ABSO	Anti Lock Brakes OBD	CAN-C	68471122AD	2C4RC1L		2C4RC1L	68471122AD
SGW	Security Gateway Module	CAN-C	68447193AB			2C4RC1L	68447193AB

ECU SUMMARY INFO (CONT...)

ECU	COUNTRY CODE	HARDWARE VERSION	SOFTWARE VERSION	IDENT	CVNS
PCM	USA	1B 47	46 03 01	4419	DFF8E724
ICS	USA	0F 0C 00	12 25 00	4400	
RFH	USA / USA	10 17 00	13 09 00	4A00	
ESM	USA / USA	0F 24 00	12 28 FF	4402	
ORC	USA / USA	12 1A 00	13 2E 00	4301	
EPS	USA / USA	12 2A 00	12 1E 01	4502	
ANC	USA	0F 05 01	12 2C 01	4210	
HVAC	USA	0E 09 00	13 05 01	4401	
DDM	USA	11 07 00	13 0B 00	4202	
PDM	USA	11 07 00	13 0B 00	4202	
DMRL	USA / USA	10 0B 00	12 0C 00	4201	
DMRR	USA / USA	10 0B 00	12 0C 00	4201	
PSDML	USA / USA	10 17 00	14 10 12	4001	
PSDMR	USA / USA	10 17 00	14 10 12	4001	
PLGM	USA	17 19 00	18 22 00	4202	
CSWM	USA	11 2A 00	13 2C 00	4302	
IPC	USA / USA	12 06 00	14 0B 00	4704	

PTS	USA	0E 32 00	12 1F 00	4311	
SCCM	USA	13 28 00	13 29 00	4301	
BCM	USA	0D 11 00	14 1B 90	4415	
RADIO	USA	13 31 14	13 31 14	8205	
OCM	USA / USA	11 1F 01	0E 2F 02	4030	
HVACR	USA	0E 09 00	10 03 02	4301	
LBSS	USA / USA	11 30 02	12 0D 00	4202	
RBSS	USA / USA	11 30 02	12 0D 00	4202	
APM	USA / USA	11 32 00	11 32 00	4001	
BPCM	Not programmed / COUNTRY_SNA	0E 03 00	13 18 03	4005	F5BC8401
HCP	USA	11 1F 04	13 30 01	4005	92BCF62B 04D8393A 050DC953
OBCM	USA	0F 0D 00	12 02 00	4002	
DSM	USA / USA	13 29 00	12 23 00	4000	
RCCC	USA	0F 1D 00	13 04 00	4000	
EAC	USA	0E 34 00	12 0F 00	4102	
AHCP	USA	11 1F 04	13 30 01	4000	
EBBM	USA	0E 19 02	14 0D 18	4000	E5898FA5
ABSO	USA	0E 15 02	14 1B 26	4201	4F158D1B
SGW		5	779	4103	

CONFIGURATION

PCM CONFIGURATION

NAME	VALUE	UNITS
Secondary Mass Airflow Sensor Equipped	False	
Active Exhaust Pressure Sensor Equipped	False	
Electronic Parking Brake Equipped	True	
Active Exhaust Valve(s) Equipped	False	
High Side Port Tumble Valve Equipped	False	
Aux Coolant Pump Heater Equipped	False	
Heater Temp Control Valve Equipped	False	
Mechanical Coolant Pump Equipped	False	
Wastegate HBridge Equipped	False	
Remote Start Present	Present	
2.0 Liter I4 Direct Injection Engine	False	
Coolant On-Off Pump Equipped	Not Equipped	
1.0 Liter I3 Engine	False	
Primary Lin Alternator Equipped	Not Equipped	
Variable Valve Lift Equipped	Not Equipped	
Dual Fuel Tank Equipped	False	
Auxillary Coolant Pump Equipped	False	
Cooled EGR Equipped	False	
Dual Alternator Gen1 Capable	False	
A/C Relay Powered from Engine Switched Battery	False	

Supercharger Equipped	False	
Low Temp Radiator Coolant Pump Equipped	False	
PTO System Equipped	False	
CNG Large Gas Tank Equipped	False	
HPT 6-Speed Trans Equipped	False	
Hybrid MEC Shifter Equipped	False	
Engine Idle Shutoff Equipped	False	
ZF 9-Speed Trans Equipped	False	
MDS Equipped	False	
Variable Speed Fuel Pump Equipped	True	
ERS Equipped Indicator	False	
O2 Sensor Bank 1 Sensor 1 Equipped	True	
GPEC2 Equipped	False	
ESIM Equipped	False	
Intake Cam 2 Equipped	True	
Engine Stop Start Equipped	False	
Trans Skip Shift Equipped	False	
VFS Actuators Available Indicator	False	
Transmission Oil Heater Equipped	False	
Secondary Air Equipped	False	
3.5 Liter V6 Engine	False	
O2 Sensor Bank 2 Sensor 2 Equipped	True	
PWM Fan Motor System Equipped	True	
1 Speed Fan Mechanical Relay System Equipped	False	
Vehicle Speed Sensor #1 Calculated from CAN	False	
4.0 Liter I6 Engine	False	
6.1 Liter V8 Engine	False	
Active Engine Mount Equipped	False	
Primary Lin Alternator Equipped	False	
Auxiliary Heater Electric Water Pump Equipped	False	
Sensorless FFV Enabled	False	
Throttle Inlet Temp Sensor Equipped	False	
Electronic Automatic Transmission (EATX) Equipped	False	
WI4 Intake Flow Control Valve Equipped	False	
Wide Range O2 Sensor 1/1 Equipped	False	
2.7 Liter V6 Engine	False	
GPEC2A Equipped	True	
Auxiliary Coolant Pump Heater Equipped	Undefined	
Active Grille Shutter Equipped	True	
Cooled EGR Equipped	False	
GPEC4 Equipped	False	
Unleaded diesel fuel	False	
PTO System Equipped	False	
Supercharger Equipped	False	

WI4 Variable Valve Timing Equipped	True	
Oil Pressure Sensor Enabled	True	
Low Temperature Radiator Coolant Pump Equipped	False	
High Side Port Tumble Valve Equipped	Undefined	
Fiat VIN Learning Strategy Equipped	False	
ICC Cruise Equipped	False	
Starter Relay 2 Equipped	False	
ZF 9-Speed Transmission Equipped	False	
Next Gen Bus Equipped	False	
Humidity, Temperature and Pressure Sensor (LIN) Equipped	False	
3.0 Liter V6 Engine	False	
3.6 Liter V6 Engine	True	
Mechanical Coolant Pump Heater Equipped	False	
Active Exhaust Pressure Sensor Equipped	False	
VMM Equipped	False	
Dual Fuel Pressure Sensor Equipped	False	
Air Shutoff Valve Bank 1 Control Solenoid 2 Equipped	False	
Exhaust Cam 1 Equipped	True	
Trans Reverse Lockout Equipped	False	
Fan Wake Up Relay System Equipped	False	
66RFE / 68RFE	False	
Wastegate H-Bridge Equipped	Undefined	
Brake Pedal Sensor Equipped	False	
Viscosity Sensor Equipped	False	
Coolant On-Off Pump Equipped	False	
AC Equipped	False	
6.4 Liter V8 Engine	False	
Secondary Fuel Pump Equipped	False	
3.7 Liter V6 Engine	False	
Linear PWM Fan Relay System Equipped	False	
CMCV H-Bridge Equipped	Undefined	
Operator Idle Speed Request Equipped	False	
Tumble Generator Valve Equipped	False	
Electric Thermostat Heater Equipped	False	
CUSW PROXI Write Programming Support Enabled	False	
Electronic Throttle Control Equipped	True	
VLP Is Learnable Indicator	False	
AC Equipped Over Bus	False	
2.0 Liter WI4 engine	False	
1.0 Liter I3 Engine	False	
Electric Coolant Valve Equipped	False	
Engine Software In Package	True	
Adaptive Cruise Control Hardware Equipped	False	
Duty Cycle Purge Valve Equipped	True	

GPEC3 Equipped	False	
Air Shutoff Valve Bank 1 Control Solenoid 1 Equipped	False	
40TE / 41TE / 41TEA	False	
45RFE / 545RFE / 65RFE	False	
Coolant On-Off Valve Equipped	False	
Turbocharger Equipped	False	
EMAT (Getrag DCT transmission) Equipped	False	
Adaptive Cruise Control Equipped	False	
Dual Stage Oil Pump Equipped	True	
2.4 Liter WI4 engine	False	
Power Steering Switch Equipped	False	
O2 Sensor Bank 2 Sensor 1 Equipped	True	
Police Package Equipped	False	
3 Speed Fan Mechanical Relay System Equipped	False	
Engine Idle Shutoff Equipped	False	
Fixed displacement AC Equipped	True	
Clutch Interlock Switch Equipped	False	
Intake Cam 1 Equipped	True	
3.8 Liter V6 Engine	False	
Electronic Coolant Pump Equipped	False	
TIP Equipped	False	
Aisin 6-Speed RWD Transmission Equipped	False	
4 Speed Automatic Transmission Equipped	False	
Variable Displacement AC Equipped	False	
Active Exhaust Valve Equipped	False	
Exhaust Cam 2 Equipped	True	
Turbine Volute Valve Actuator Equipped	Undefined	
TOOLCONFIG_OIL_PRESS_ABS_EQUIPPED	True	
Buffered Crank Output for PHEV Engine Pulse Calculation Equipped	True	
Constant Heater Temperature Control Valve Equipped	False	
Continuous Variable Transmission Equipped	False	
3.3 Liter V6 Engine	False	
Brushless PWM Fan Equipped	NOT_FAN_PWM_BOSCH_BRUSHLESS_CNFG	
Electric Water Pump Equipped	False	
1.8 Liter WI4 engine	False	
4.7 Liter V8 Engine	False	
Compressed Natural Gas Equipped	False	
3.2 Liter V6 Engine	False	
Vehicle Speed Sensor #1 Calculated by ECU	False	
SRV Equipped	False	
62TE	False	
Battery Temp Sensor Equipped	False	
HPT 6-Speed Transmission Equipped	False	
DUAL_ALTERNATOR_GEN1_LEARNEDCOPY	False	

CUSW (29-Bit) Equipped	False	
Inrush Current Reduction Relay Equipped	False	
Dual Speed Fuel Pump Equipped	False	
CUSW (11-Bit) Equipped	False	
Shift Indicator Lamp Equipped	False	
VLP Equipped Indicator	False	
2 Speed Fan PWM Relay System Equipped	False	
4 Button Integrated Cruise Control	False	
Direct Injection Equipped	False	
Electronic Vacuum Pump Equipped	False	
Air Shutoff Valve Bank 2 Control Solenoid 2 Equipped	False	
Hybrid Electric Vehicle Equipped	True	
6.2 Liter V8 Engine	False	
5.7 Liter V8 Engine	False	
Wide Range O2 Sensor 2/1 Equipped	False	
Cummins Equipped	False	
Fiat 940 Compact Equipped	False	
A/C Equipped	False	
Knock Sensor 1 Equipped	True	
Yaw Rate Sensor ESC Equipped	False	
Unleaded Gasoline Fuel	True	
Port Flap Valve Equipped	False	
Barometric Sensor Equipped	False	
Auxiliary Coolant Pump Equipped	False	
O2 Sensor Bank 1 Sensor 2 Equipped	True	
42RLE	False	
MTV Solenoid Equipped	False	
Rear Heater Equipped	False	
Transmission Software Included	False	
O2 Sensor Bank 1 Sensor 3 Equipped	False	
ETC Cruise equipped	False	
Dual Fuel Tank Equipped	False	
2 Speed Fan 3 Driver 3 Relay System Equipped	False	
MultiAir Equipped	False	
Linear EGR Equipped	False	
Powernet Equipped	True	
Linear Purge Equipped	False	
Buffered Crank Output for ANC (Active Noise Cancellation) Equipped	True	
2 Speed Fan Mechanical Relay System Equipped	False	
Knock Sensor 2 Equipped	True	
Engine Oil Heater Cooler Equipped	True	
Bi-Directional Crank Sensor Equipped	True	
Dual Fuel Pressure Sensor Equipped	False	
CUSW 4-Button Cruise Equipped	False	

Make Up Air Sensor Equipped	False	
Cylinder Pressure Sensor Equipped	False	
Throttle Inlet Temp Sensor Equipped	False	
5 Button Cruise (LIN) Equipped	True	
Brake Pedal Sensor Equipped	False	
Power Steering Angle Sensor Mandatory	False	
INTAKE O2 SENSOR EQUIPPED	False	
LIN Humidity, Temp, and Pressure Sensor Equipped	False	
Operator Idle Speed Request Equipped	False	
SWAP HARDWIRED BRAKE SWITCH INPUTS	False	
Clutch Sensor Equipped	False	
Mass Airflow System Equipped	False	
Engine Oil Pressure Sensor Type	255	None

ICS CONFIGURATION

NAME	VALUE	UNITS
Display Type (Mid)	False	
Display Type (Base)	True	
Display Type (High)	False	

RFH CONFIGURATION

NAME	VALUE	UNITS
Hardware Configuration: Trunk Door Handle H/W	Simple Switch AP	
Hardware Configuration: Remote Start Antenna	Present	
Hardware Configuration: Front Right Door Handle H/W	Serial AP	
Hardware Configuration: Front Left Door Handle H/W	Serial AP	
Hardware Configuration: Rear Right Door Handle H/W	No AP	
Hardware Configuration: Rear Left Door Handle H/W	No AP	
Valid Key In Ignition	Yes	
Fob Location #3 Successfully Programmed	No	
Fob Location #5 Key sense status	Fob is NOT Key Sense	
Secret Key Sent to Body Controller - Original attempt	Yes	
Fob Location #7 Key sense status	Fob is NOT Key Sense	
Fob Location #3 Key sense status	Fob is NOT Key Sense	
Fob Location #7 Successfully Programmed	No	
Fob Location #6 Successfully Programmed	No	
Fob Location #5 Successfully Programmed	No	
Fob Location #8 Key sense status	Fob is NOT Key Sense	
PIN Successfully Programmed	Yes	
RFHub Locked	RFHUB Locked after IAC write	
Fob Location #1 Key sense status	Fob is NOT Key Sense	
Fob Location #4 Key sense status	Fob is NOT Key Sense	
Fob Location #6 Key sense status	Fob is NOT Key Sense	
Fob Location #1 Successfully Programmed	Yes	

Secret Key Sent to Body Controller - Most recent attempt	Yes	
Fob Location #2 Successfully Programmed	Yes	
Fob Location #4 Successfully Programmed	No	
Fob Location #2 Key sense status	Fob is NOT Key Sense	
VIN Successfully Programmed	Yes	
Fob Location #8 Successfully Programmed	No	
Base TPM	False	
Auto Park Present	True	
e-shifter present	True	
Secret Codes Programmed	True	
KeySense Configuration	False	
Ignition system type connected	KIN system	
RKE	True	
Remote Start Present	True	
\$0214 Programmed by	Programmed by Supplier EOL	
TPM Auto-Locate Enabled	True	
Keyless Go	True	
Passive Entry	True	
Hybrid Type	PHEV	
Module Configuration Status	True	
Premium TPM	True	
Back Up ECU Configuration 16	True	
Back Up ECU Configuration 14	True	
Back Up ECU Configuration 7	True	
Back Up Vehicle Config 1	True	
Back Up ECU Configuration 10	True	
Back Up ECU Configuration 11	True	
Back Up Vehicle Config 4	True	
Back Up Vehicle Config 3	True	
Back Up Customer Settings Menu 1 (CSM1)	True	
Back Up ECU Configuration 2	True	
Back Up ECU Configuration 1	True	
Back Up ECU Configuration 9	True	
Back Up Programmed ECUs: Cabin Network	True	
Back Up Vehicle Config 5	True	
Back Up ECU Configuration 3	True	
Back Up Customer Settings Menu 2 (CSM2)	True	
Back Up Vehicle Config 6	True	
Back Up ECU Configuration 12	True	
Back Up Programmed ECUs: P/T Chassis Network	True	
Back Up ECU Configuration 4	True	
Back Up ECU Configuration 17	True	
Back Up ECU Configuration 8	True	
Back Up ECU Configuration 13	True	

Back Up Vehicle Config 7	True	
Back Up ECU Configuration 5	True	
Back Up Vehicle Config 2	True	
Back Up ECU Configuration 15	True	
Back Up ECU Configuration 6	True	

ORC CONFIGURATION

NAME	VALUE	UNITS
First Row Driver Seatbelt Buckle Switch	Configured	
Driver Seat Track Position Sensor	Configured	
Second Row Left Seat Side Airbag	Not Configured	
Rollover Sensing	Configured	
Passenger Seatbelt Retractor Pretensioner	Configured	
Passenger Seatbelt Anchor Pretensioner	Configured	
Driver Seatbelt Anchor Pretensioner	Configured	
Left Side Seat Squib 1	Configured	
Driver Frontal Squib 3	Configured	
Passenger Seatbelt Load Limiter	Configured	
Passenger Occupant Detection Sensor	Not Configured	
Passenger Seatbelt Buckle Pretensioner	Not Configured	
Second Row Left seat belt Switch	Not Configured	
Left B-Pillar Impact Acceleration Sensor	Configured	
Right Up-Front Acceleration Sensor	Configured	
Configuration Column Identifier	A3	
Passenger Airbag Disable Indicator	Not Configured	
Passenger Frontal Squib 1	Configured	
Driver Frontal Squib 1	Configured	
Passenger Frontal Squib 3	Configured	
Right Side Seat Squib 1	Configured	
Second Row Right seat belt Switch	Not Configured	
Left Up-Front Acceleration Sensor	Configured	
Right Curtain Squib 1	Configured	
Left C-Pillar Impact Acceleration Sensor	Configured	
Passenger Seat Track Position Sensor	Configured	
Driver Knee Bolster Squib	Configured	
Occupant Classification (OCM)	Configured	
Passenger Frontal Squib 2	Configured	
Driver Frontal Squib 4	Not Configured	
Second Row Center seat belt Switch	Not Configured	
Left Curtain Squib 1	Configured	
Right Side Door Pressure Sensor	Configured	
First Row Passenger Seatbelt Buckle Switch	Configured	
Right B-Pillar Impact Acceleration Sensor	Configured	
Left D-Pillar Impact Acceleration Sensor	Configured	

Right D-Pillar Impact Acceleration Sensor	Configured	
Right C-Pillar Impact Acceleration Sensor	Configured	
Driver Seatbelt Load Limiter	Configured	
Driver Seatbelt Retractor Pretensioner	Configured	
Second Row Right Seat Side Airbag	Not Configured	
Passenger Frontal Squib 4	Not Configured	
Passenger Airbag Disable Switch	Not Configured	
Passenger Knee Bolster Squib	Configured	
Driver Frontal Squib 2	Configured	
Left Side Door Pressure Sensor	Configured	
EPPM	Not Configured	
Driver Seatbelt Buckle Pretensioner	Not Configured	

EPS CONFIGURATION

NAME	VALUE	UNITS
Stop/Start Feature Active	False	
Parallel Park Assist Feature Active	False	
Dynamic Steering Torque Feature Active	True	
Lane Feedback Feature Active	False	

ANC CONFIGURATION

NAME	VALUE	UNITS
Premuim - 2 (12 Channel)	False	
Premuim - 1 (8 channel)	False	
Premium - 3 (SRT8)	True	
Door Module - Left Rear	Present	
NetCFG Stat AT, I, PT	Request Data	
Door Module - Right Front	Present	
Door Module - Right Rear	Present	
Door Module - Left Front	Present	
Left/Right Hand Drive	SNA / Not Programmed	
Current ANC Calibration ID - Service	Harman ANC Module 3.6L	
ANC Status	Off - Door Mute	
ANC Calibration Date - Year	18	
ANC Calibration Date - Patch	4	
ANC Calibration Date - Week	45	

HVAC CONFIGURATION

NAME	VALUE	UNITS
Dual Zone MTC Control (BB)	False	
MTC With EBL (3Knob)	False	
MTC heater only (3Knob)	False	
Single Zone MTC Control (BB)	False	
MTC Without EBL (3Knob)	False	

DualZone ATC Control (Factory) (BB)	False	
DualZone ATC Control (BB)	False	
HVAC Configuration	Dual Zone ATC + Rear	

PDM CONFIGURATION

NAME	VALUE	UNITS
Frameless Window	False	

PSDML CONFIGURATION

NAME	VALUE	UNITS
VSIM Status	False	

PSDMR CONFIGURATION

NAME	VALUE	UNITS
UPFM Status (Present = True, Absent = False)	False	

CSWM CONFIGURATION

NAME	VALUE	UNITS
EC - Seat B	Programmed	
EC - Seat A	Programmed	
Vehicle Line L-Series	False	
Vehicle Line R-Series	True	
Vehicle Line D-Series	False	
Heated Steering Wheel	True	
Vehicle Line J-Series	False	
Vehicle Line U-Series	False	
Vehicle Line W-Series	False	
Vehicle Line M-Series	False	
Vehicle Line P-Series	False	

IPC CONFIGURATION

NAME	VALUE	UNITS
PHEV	True	
Rear Fog Lamp	False	

PTS CONFIGURATION

NAME	VALUE	UNITS
Front License Plate Configuration	Front Plate Config - USA	
Front System with 6 Rear Sensors	False	
Rear System with 6 Front Sensors	False	

SCCM CONFIGURATION

NAME	VALUE	UNITS
------	-------	-------

Rear Wiper	True	
Paddle Shifter	False	
Cruise Control / ACC	True	
Tilt Telescope	False	

BCM CONFIGURATION

NAME	VALUE	UNITS
Number of Reprogramming Attempts - Counter #0	1	
Vehicle Configuration Programmed Status	True	
Last Programmed Status	Manufacturing	
ECU Configuration 10	3	
Vehicle Config CSM1	3	
ECU Configuration 11	3	
ECU Configuration 6 (Brake)	3	
ECU Configuration 5 (Wireless)	3	
Programmed ECUs: P/T Chassis Network	3	
ECU Configuration 15 (Suspension)	3	
Programmed ECUs: Hybrid LAN Network	0	
ECU Configuration 8 (LIN and Miscellaneous)	3	
ECU Configuration 9A	3	
Vehicle Configuration 2 - Write Counter	3	
Vehicle Configuration 7 - Write Counter	3	
ECU Configuration 6 (Safety)	3	
ECU Configuration 2 (CBC Features)	3	
Vehicle Configuration 5 - Write Counter	3	
Programmed ECUs: Cabin Network	3	
Vehicle Configuration Auto Write Counter	1	
ECU Configuration 3	3	
ECU Configuration 7 (CBC Exterior Lighting Calibrations)	3	
ECU Configuration 12	3	
ECU Configuration 9 (ITM)	3	
ECU Configuration 1 (CBC Configurable Inputs and Outputs)	3	
ECU Configuration 14	3	
Vehicle Configuration 6 - Write Counter	3	
ECU Configuration 13	3	
ECU Configuration 5 (Memory)	3	
Vehicle Config CSM2	3	
ECU Configuration 15 (CBC Features)	3	
Programmed Network Configuration - Audio / Telematics Network	0	
Vehicle Configuration 4 - Write Counter	3	
ECU Configuration 6 (Powertrain)	3	
ECU Configuration 6 (Suspension)	3	
ECU Configuration 5 (Doors)	3	
ECU Configuration 4	3	

Vehicle Configuration 3 - Write Counter	3	
Last Configuration Odometer	0	miles
Vehicle Configuration 1 - Write Counter	3	
Emode Present	Not Set	
PTS Configuration	Rear / REAR	
Model Year	2020	
Vehicle Line	RU	
Hill Descent Feature Present	Not Set	
Body Style	Station Wagon	
Shifter Type	5 Position Rotary Eshifter PRNDL / Type RS5L	
Auto Highbeam	Not Set	
Drive Configuration	2WD Front	
Country Code	USA	
Special Packages	74	
Remote Start Present	Set	
Select Speed Control Feature Present	Not Set	
Left/Right Hand Drive	Left Hand Drive	
Performance Pages Present	Not Present	
Maximum Vehicle Speed	0	MPH
Max Load Inflation Pressure Rear Tire	36.0	PSI
Special Packages IC	Pacifica	
Power Inverter Type	No Power Inverter	
Cruise Feature is Present	Set	
Max Load Inflation Pressure Front Tire	36.0	PSI
Off Road Capable	Not Set	
Air Conditioning Present	Not Set	
Rain Sensor Present	Not Set	
Flipper Glass Present	Not Set	
SKIM System Present	Not Set	
Full Size Spare	Not Set	
Thatcham Present	Not Set	
Display Outside Temperature Present	Set	
Keyless Go Present	Set	
Vehicle is an SRT	Not Set	
Two Fuel Sending Units Present	Not Set	
Display Compass Heading Present	Set	
Wheel Base	Wheel base not programmed / WB_NP	
Auto Headlamp Feature Present	Set	
Premium TPM system present	Set	
Police Lighting Feature	Not Set	
Window Express Feature Configuration	Front windows express only	
Vehicle Brand	Chrysler	
Auto Park Present	Set	

T-Case Type	Not Present / Not Present	
Adjustable Pedal Feature Present (non-Memory)	Not Set	
Forward Collision Warning present	Not Set	
Paddle Shift Feature Present	Not Set	
Power Right Sliding Door Present	Set	
Disable Display of Radio Clock	Not Set	
FOBIK Safe Enable	Set	
Chassis Type	Type 9	
Fuel Capacity	17	gallons
ELV Present	Not Set	
Door Alert Feature Present	Not Set	
Passive Entry Present	Set	
RKE System Present	Set	
Secondary Lock Present	Not Set	
HVAC Configuration	Dual Zone ATC + Rear	
Sport Mode Present	Not Set	
ESCL system present	Not Set	
High Intensity Discharge Head Lamps	Not Set	
Collision Mitigation System present	Not Set	
Power Left Sliding Door Present	Set	
Liftgate/Trunk Type	Power Liftgate	
Base TPM system present	Not Set	
Transfer Case High Ratio	1.000	No Unit
Transfer Case Low Range Reduction Ratio	0.000	
Dynamic Tire Circumference (All or Rear)	89	inch
Axle Ratio	3.251	
Analog Door Sensor Configuration	Driver Door Only Analog Sensor	
Air Quality System Present	Not Set	
Steering Ratio at Negative Angle 1	0.0	No Unit
Connector E Pin 29: Rear Wiper Motor Park Signal Present	Set	
Connector D Pin 11: Stop/Turn Trailer Tow Left Output Present	Not Set	
Connector E Pin 9: Run-ACC Y Relay #2 Output Present	Set	
Connector G Pin 9: Ambient Light Dimmer Wheel Input Present	Set	
Connector E Pin 5: PHEV Fuel Door Switch Input	Set	
Connector G Pin 24 (Internally tied to Connector F Pin 7): Ambient Lighting Output	Not Set	
Connector F Pin 6: Fuel Door Motor Output Signal Present	Set	
Connector D Pin 15: Left Dedicated DRL Lamps Output Present	Set	
Connector A Pin 11: Hood Ajar Switch Input Present	Set	
Connector E Pin 4/Connector F Pin 32: Rear Park Lamps Output Present	Set	
Connector A Pin 3/Connector D Pin 2: Low Beam Output Present	Set	
Connector E Pin 8: PHEV HCP Hardwire Wakeup	Set	
Connector E Pin 7: Left HID Relay Control Output Present	Not Set	
Connector D Pin 10: Trailer Tow Tail Lamp Output Present	Not Set	
Connector G Pin 15: UGDO Feed Output Present	Set	

Connector F Pin 29: Horn Switch Present	Set	
Connector A Pin 1 and Connector D Pin 13: Front Fog Lamps Output Present	Set	
Connector E Pin 3/Connector F Pin 42: Rear Turn Lamps Output Present	Not Set	
Connector E Pin 48 (Tied internally to Connector A Pin16): Rear Wiper Motor Control Output Present	Set	
Connector G Pin 22: VTA Warning LED Output Present	Set	
Connector F Pin 9: Analog Door Ajar Signal Front Driver Present	Set	
Connector E Pin 11: Vacuum Switch Input	Not Set	
Connector A Pin 10/Connector D Pin 5: Side Markers Output Present	Set	
Connector E Pin 42: Charge Port Lock Output Present	Set	
Connector E Pin 41: Charge Port Unlock Output Present	Set	
Connector A Pin 22: Right Dedicated DRL Lamp Output Present	Set	
Connector F Pin 8 : Liftgate Release Outside Handle Switch Present	Not Set	
Connector E Pin 34: Vacuum Cleaner Relay Output Present	Not Set	
Connector D Pin 12: PHEV ECM Hardwire Wake Up Output Present	Set	
Connector F Pin 23: Door Lock Switch Signal Front Passenger Present	Set	
Connector D Pin 7: Stop/Turn Trailer Tow Right Output Present	Not Set	
Connector D Pin 22/ Connector D Pin 23: Ambient Temperature Signal/Return Present	Set	
Connector D Pin 9: Trailer Tow Backup Output Present	Not Set	
Connector E Pin 39/Connector F Pin 5: Rear Fog Lamps Output Present	Not Set	
Connector F Pin 4: Liftgate Release Present	Not Set	
Connectro E Pin 37: Right HID Control Output Present	Not Set	
Connector F Pin 35: Inverter Enable Relay Output Present	Not Set	
LED Rear Turn Lamps Present	Not Set	
Front Wiper Wipes After Wash	2 Wipes	
Fuel Door Release Enabled	Not Present	
Quad Headlamps Enable	Set	
Reversible Washer Pump Enable	Set	
DRL Dropout Enable	Set	
Park Lamp Loadshed Enable	Set	
LED Stop Lamps Present	Not Set	
Headlamp Washer Low Fluid Shut-Off Enable	Set	
Hazard Lamp Configuration	Latching Switch	
LED Tail Lamps Present	Set	
Bi Xenon Headlamps Enable	Not Set	
Front Fog Lamp Dropout Enable	Set	
LED Low Beam Lamps Present	Not Set	
Headlamp Wash Interval	wash cycle#11	
LED Dedicated DRL Present	Set	
Wiper Service Position Enabled	Not Set	
Illuminated approach Enabled	Not Set	
Front Wiper Park Enable	Set	
LED License Lamps Present	Set	
Horn Chirp Allowed	Set	

Fuel Door Present	Not Set	
Combined Front Park/Turn Feature Enable	Not Set	
DRL Configuration	No DRL	
DRL Lamp Location	Dedicated	
Rear Wiper Park Enable	Set	
Combined Rear Lighting Enable	Set	
LED Reverse Lamps Present	Not Set	
Intermittent Wiper States	4 Intermittent Wiper position Switch	
Headlamp Wash Shot	double	
LED Rear Fog Lamps Present	Not Set	
Trailer Tow Present	Not Set	
Tip Start Enabled	Set	
LED Front Turn Lamps Present	Not Set	
Side Repeaters Enable	Not Set	
LED Front Park/Marker Lamps Present	Set	
Headlamp Wash Spray Duration (at 100 ms intervals)	1100ms	
One Touch Lane Change	Set	
Tunnel Detection	Not Set	
Dual Start Relay System Present	Not Set	
Exterior Light Loadshed Enable	Set	
LED Front Fog Lamps Present	Not Set	
LED CHMSL Lamp Present	Set	
LED High Beam Lamps Present	Not Set	
Destination	United States of America	
Surround Sound Feature Present	Not Set	
Power Door Locks Present	Set	
Microphone Type	Peiker 300 mv	
Heated Steering Wheel Present	Set	
Power Inverter Present	Not Set	
Disable CD Eject	Not Set	
Cabin Equilization Curve Number	6 Speaker Base (RU)	
Antenna Type	Active Primary and no secondary antenna	
Splashscreen Type	Vehicle Brand	
Microphone Configuration	2 Microphones	
External Port Type	AUX + USB	
Microphone Tuning Parameter	Absent [Not Used]	
Front Park Assist Present	Set	
Front Heated Seats Present	Set	
Rear Camera Present	Set	
Fleet Vehicle Content	Not Set	
AP5 Trunk Lock	Simple Switch	
AP2 Right Front	Smart Switch	
Vehicle Variant	Undefined	
Tip Start Present	Set	

AP4 Right Rear	CAN	
Airport Scenario Trunk	Not Set	
AP1 Left Front	Smart Switch	
AP3 Left Rear	CAN	
AP5 Trunk Unlock	CAN	
Heated Mirrors Present	Set	
Blindspot Mirror Present	Set	
Frameless Window Present	Not Set	
Sun Shade	Not Set	
Global Up	Not Set	
Folding mirrors present	Not Set	
Electro-chromatic passenger mirror present	Not Set	
Window Motor Type	Not Set	
Global Down	Not Set	
Passenger Window Lockout	Not Set	
Tow Mirror Present	Not Set	
Passenger Memory Mirror Present	Not Set	
Rear Door Pre Short Drop	Not Set	
Electro-chromatic driver mirror present	Not Set	
Driver Memory Mirrors Present	Not Set	
Window Hall Sensors Present	Not Set	
Mirror turn signals present	Not Set	
Puddle Lamp Present	Not Set	
Heated Steering Wheel Present	Present	
Tilt/Telescope Steering Present	Not Set	
Memory Adjustable Pedals Present	Not Set	
Driver Memory Seat Present	Not Set	
Heated Seat Material Type	Perforated Leather	
Stow 'n Assist Present - Driver	Not Set	
Stow 'n Assist Present - Passenger	Not Set	
Rear Heated Seats Present	Not Present	
Front Vented Seats Present	Not Present	
Heated Wheel Material Type	Full Leather	
Brake System ECU Configuration A	value 0	
ECO Mode Configuration	Remember Previous State with Ignition Key Cycle	
Dual Alternator Present	Not Set	
Connector F Pin 13: Left Sliding Door Switch Input (B-Pillar)	Left B-Pillar sliding Door Switch	
License Plate Lamp Disable	Not Set	
Connector G Pin 2: Fog Lamp Switch Input	Fog Lamp Switch	
Connector F Pin 34: Spare HSD	Not Present	
Connector F Pin 16: Passenger Door Lock Switch Input	Not Present	
Auto High Beam Module Location	None	
Engine Off Clear Time	180	Time

Connector F Pin 30: Fuel Door Lock (BUX)	Not Present	
Heatsoak Speed	15	Counter
Connector D Pin 8: Digital Spare Input #2	Not Present	
Ambient Stable Counter Limit	40	Counter
Max Engine Off Time	220	Time
Connector F Pin 29: Horn Switch Present	Horn Switch Input	
Connector F Pin 37: Vacuum Cleaner Power Saver Indicator	Not Present	
Connector E Pin 48 (Tied internally to Connector A Pin16): Rear Wiper Motor Control Output Present	Rear Wiper (0)	
Humidy Sensor Long Present	Set	
Connector E Pin 3: Left Rear Turn Signal	Left Rear Turn Signal	
Connector F Pin 14: Right Sliding Door Switch Input (B-Pillar)	Right B-Pillar Sliding Door Switch	
Connector G Pin11/Connector G Pin 12: Not Used	ERS	
Connector E Pin 28: Secondary Door Ajar Switch Present - PIN E-28	Set	
Manual Door Locks Present	Not Set	
Heatsoak Flush Time	105	Time
Rain Sensor Module #2 Present	Not Set	
CHMSL Lamp Output Disable	Not Set	
Connctor F Pin 33: Fuel Door Unlock (BUX)	Not Present	
Connector E Pin 39: Right Rear Turn Signal	Right Rear Turn Signal	
Connector F Pin 15: Driver Door Lock Switch Input	Not Present	
Connector D Pin 4: Digital Spare Input #1	Not Present	
Heatsoak Set Time	15	Time
Steering Smoothing Factor	Filter Off	
Nose Dive Threshold	Filter Off	
Brake Smoothing Factor	Filter Off	
Average Last Longitudinal Acceleration Values	No Averaging	
Excess Lateral Acceleration Factor	Filter Off	
Brake Smoothing Duration	Filter Off	
Steering Smoothing Duration	Filter Off	
Maximum Lateral Change	Filter Off	
Acceleration Threshold	Filter Off	
Nose Dive Factor	Filter Off	
Excess Longitudinal Acceleration Factor	Filter Off	
Brake Smoothing Threshold	Filter Off	
Acceleration Factor	Filter Off	
Average Last Lateral Acceleration Values	No Averaging	
Steering Smoothing Threshold	Filter Off	
Maximum Longitudinal Change	Filter Off	
VTA Hood Ajar Monitoring	Not Set	
RKE Auto-Relock Feature Enable	Not Set	
PE Auto-Relock Feature Enable	Set	
Auto High Beam ON Threshold	25 km/hr	
Auto High Beam OFF Threshold	20 km/hr	
Interior Lighting Night Threshold	4.45147	Volt

Interior Lighting Day Threshold	4.27498	Volt
Headlamp Soak Delay	1.0 sec	
Horn Chirp Duration	Short	
Parking Light Enable	Not Set	
Smart Alternator Present	Not Set	
Temperature Display Resolution	HaLF	
TPMS Configuration	Logic 1 NHTSA Enable Warning	
Sunroof Present	Not Set	
ANC Calibration Parameter Data Set	Non Amplified 3.6L PHEV	
Radio Speaker Open Circuit Disable (RF)	Set	
Drive Mode Version	Version 1	
Auto Dimming Mirror Hard Button Present	Set	
Radio Speaker Open Circuit Disable (LF)	Set	
Radio Speaker Open Circuit Disable (LR)	Set	
Radio Speaker Open Circuit Disable (RR)	Set	
Automatic Crash Notification Feature Present	Undefined	
Show Phone Information in Cluster	01	
Surround View Camera On/Off Softkey Present	Not Set	
Park Assist Tuning Set	Sahara	
3rd Row Lock CSO	Not Set	
Siren	Not Set	
Ultrasonics	Not Set	
Tilt	Not Set	
ESC	Set	
HCP	Set	
AHCP	Set	
ESM	Set	
ORC	Set	
APM	Set	
ECM	Set	
BPCM	Set	
OBCM	Set	
EAC	Set	
EBCM	Set	
CVPM	Not Set	
VRM	Not Set	
MSMP	Not Set	
AMP	Not Set	
HVAC	Set	
PDM	Set	
VTM	Not Set	
DDM	Set	
EOMR	Set	
EDM	Not Set	

ITM	Not Set	
DMRR	Set	
MSM	Not Set	
HVACR	Set	
EAM	Not Set	
ICS	Set	
DSM	Set	
PSDML	Set	
ANC	Set	
BCM (Interior Bus)	Set	
DTV	Not Set	
FSM	Not Set	
DMRL	Set	
PLGM	Set	
HSM	Set	
PSDMR	Set	
Radio	Set	
Compass Mounting Angle	0	Degree
IBS Present	Set	
Auto Relock Time	60	seconds
Fobik Safe Alerts Per Ignition Cycle	2	
Illuminated Approach Headlamp Target Percentage	125 (62.5%)	
Humidity Sensor Present	Set	
Illuminated Approach Taillamp Target Percentage	125 (62.5%)	
Illuminated Approach Interior Lighting Ramp Up Time	130(2600ms)	
Alert no Reply	Set	
Alert On Search Timeout	Set	
Alert On System Fault	Set	
Illuminated Approach Interior Lighting Target Percentage	100(50%)	
OHC Module Present	Set	
Washer Fluid Level Voltage Threshold	4.46 volts	
EVIC SWS Module Present	Set	
CRVMM Present	Set	
HFRM Present	Not Set	
VTA System Present	VTA	
Panic Enable	Set	
Compass Mounting Orientation	Rightside up	
Connector F Pin 41: Backup-Reverse lamp Left	Set	
Connector E Pin 7: Left HID Relay Control	Left HID Lamp Relay	
Connector D Pin 12: PHEV ECM Hardwire Wake Up	Engine Control Module Wake up (PHEV only)	
Connector D Pin 11: Stop/Turn Trailer Tow Left Output Present	Reserved	
Connector A Pin 11: Hood Ajar Switch Signal	500 ohm series and 500 ohm parallel resistors	
Connector D Pin 21: Brake Fluid Level Switch	no parallel resistor	

Connector E Pin 1: Backup-Reverse lamp Right	Set	
Connector E Pin 37: Right HID Relay Control	Right HID Lamp Relay	
Connector F Pin 5: Left Rear Fog Lamp	Output Disable	
Connector E Pin 3: Left Rear Turn Signal	Left Rear Turn Signal	
Connector F Pin 31: Right Sliding Door Ajar	Right Sliding Door Ajar	
Connector F Pin 28: Right Rear Turn Lamp Fault Sense	Disable	
Connector F Pin 4: Liftgate Release	Trunk/Liftgate Release	
Connector F Pin 42: Right Rear Turn Signal	Right Rear Turn Signal	
Connector F Pin 25: Left Rear Turn Lamp Fault Sense	Disable	
Stop/Start Enable Switch Present	Not Set	
Connector A Pin 2: Right High Beam Feed	Right High Beam (0)	
Connector D Pin 1: Left High Beam Feed	Left High Beam (0)	
Connector F Pin 27: Left Sliding Door Ajar	Left Sliding Door Ajar	
Connector E Pin 5: E-5 PHEV Fuel Door Switch Input	PHEV Fuel Door Switch	
Connector E Pin 39: Right Rear Fog Lamp	Output Disable	
Connector E Pin 29: Rear Wiper Motor Park Signal	Reserved	
Connector F Pin 29: Horn Switch Input	Horn Switch Input	
Passive Ped Pro Present	False	
Tow Hooks Present	False	
1st Row Seat Side Airbags Present	True	
Passenger Kneebag Present	True	
BUX Market	False	
ODS Present	False	
Curtain Airbags Present	True	
Driver Kneebag Present	True	
Integrated EPP Present	False	
IPC	Set	
ESM	Set	
ORC	Set	
BCM (PT)	Set	
SCCM	Set	
ACC	Not Set	
PCM	Set	
PTS	Set	
EPS	Set	
RFH	Set	
AHLM	Not Set	
ESL	Not Set	
FFCM	Not Set	
ABSO	Set	
OCM	Set	
ABS	Not Set	
TCM	Not Set	
HCP	Set	

Accessory Delay Time	45	seconds
Sliding Door Chime Enable	Set	
Sliding Door Alert	Not Set	
Auto Unlock	Set	
Headlamps on with Wipers	Set	
Flash Lamps on Lock	Set	
Daytime Running Lamps	Set	
Auto Wipers	Not Set	
Sound Horn On Lock Status	Chirp on 1st press/FIRST	
Hands Free Sliding Door Enable	Set	
Sound Horn on Remote Start	Set	
Auto Lock	Set	
Unlock all doors on 1st press	Set	
Sound Horn on Lock	Set	
Illuminated Approach Time	30	seconds
Headlamp Delay Time	30	seconds
Auto Highbeam	Not Set	
IBS Quiescence Current Limit	-250	mA
IBS Minimal Charge Limit	10	AmpHrs
IBS Minimum Voltage Limit	5.0	Volts
Battery Type II	255	
Battery Types	SNA	
IBS Activate MWU	Not Set	
IBS Minimum Charge Limit	600	mA
Front Park/Turn Voltage	Park to Turn ratio 55 Percent	
Left Front Corner Voltage	13.2 Volts	
Left Low Beam Voltage Regulation	13.6 Volts	
Right High Beam Voltage Regulation	13.8 Volts	
Left Rear Corner Voltage	14 Volts	
Left High Beam Voltage Regulation	13.6 Volts	
Right Rear Corner Voltage	14 Volts	
Right Low Beam Voltage Regulation	14 Volts	
Auto Headlamp On Threshold	3.31409	Volt
Auto Headlamp Off Threshold	2.54930	Volt
Right Front Corner Voltage	13.4 Volts	
Rear View Camera Static Grid Lines Enabled	Not Set	
Rear View Camera Dynamic Grid Lines Enabled	Set	

RADIO CONFIGURATION

NAME	VALUE	UNITS
GPS on the Bus messaging Authorization	Allowed	
Satellite Subscription Suspend Year	46	
Satellite Subscription Suspend Day	01	
Satellite Subscription Status	Subscribed	

Satellite Subscription Reason Code	00	
Satellite Subscription ID	WACTGDMR	
Satellite Subscription Suspend Month	01	
Aux Jack	Not Inserted	
Enumerated USB Devices	0	No Unit
SD Card Readers Detected	0	No Unit
USB Hubs Detected	1	No Unit
DTV Short Term Configuration	—	
911 Button	—	
Cellular	—	
Navigation Active	—	
Internal CD Player	—	
Bluetooth	—	
FM Diversity	—	
SDARS	—	
Application Framework	—	
Wi-Fi	—	
Anti-Theft Enable Status	—	
Front Seat Video Playback	—	
Automated Loudness	—	
12/24 Time Selection	—	
Cabin EQ Curve Number Currently Used by Radio	—	
Clock Defeat	—	
Splash Screen	—	

HVACR CONFIGURATION


NAME	VALUE	UNITS
DualZone ATC Control (BB)	False	
MTC w EBL (3Knob)	False	
Dual Zone MTC Control (BB)	False	
MTC heater only (3Knob)	False	
MTC wo EBL (3Knob)	False	
DualZone ATC Control (Factory) (BB)	False	
Single Zone MTC Control (BB)	False	

RCCC CONFIGURATION

NAME	VALUE	UNITS
MTC with EBL	False	
DualZone ATC Control	True	
MTC Heater Only	False	
Single Zone MTC Control	False	
Dual Zone MTC Control	False	
DualZone ATC Control	False	
MTC without EBL	False	

ABSO CONFIGURATION

NAME	VALUE	UNITS
Engine Displacement	3.6	No Unit
ESC BLA Enabled	False	
PN ESC Byte2	0	
PN ESC Byte1	0	
Drive Configuration	2WD Front	
Dynamic Tire Circumference	89	inch
VC Chassis Type	Type 9	
Axle Ratio	3.251	No Unit
Hardwired VSO	True	
ACC	True	
Multiple Pressure Sensors	True	
Rear Directional Sensors	True	
Feature PIN	False	
Front Directional Sensors	False	
EPB	True	

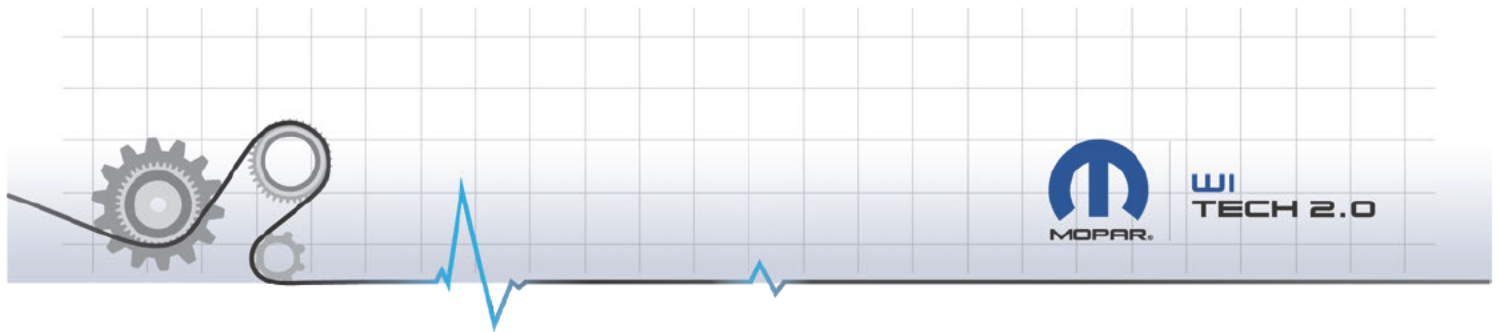

VEHICLE HEALTH REPORT

Vehicle 2020 CHRYSLER PACIFICA (PHEV) 3.6L V6 HYBRID ENGINE
VIN 2C4RC1L7 [REDACTED]

Odometer 904.9 miles
Publication Date Feb 18, 2021, 11:24:51 AM

ECU SUMMARY INFO

ECU	NAME	BUS TYPE	FLASH PART #	CURRENT	ORIGINAL	PART #
PCM	Powertrain Control Module	CAN-C	68444229AE	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68444229AE
ICS	Integrated Center Stack	CAN-I	6UX601X8AA	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	6UX601X8AA
RFH	Radio Frequency Hub	CAN-C	68453559AB	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68453559AB
ESM	Electronic Shifter	CAN-C	68240089AM	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68240089AM
ORC	Occupant Restraint	CAN-C	68453076AD	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68453076AD
EPS	Electric Power Steering	CAN-C	68460392AA	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68460392AA
ANC	Active Noise Cancellation	CAN-I	68440556AB	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68440556AB
HVAC	Heat, Ventilation and A/C	CAN-I	68447893AC	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68447893AC
DDM	Driver Door Module	CAN-I	68424451AC	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68424451AC
PDM	Passenger Door Module	CAN-I	68424450AC	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68424450AC
DMRL	Door Module Rear Left	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68225096AG
DMRR	Door Module Rear Right	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68225096AG
PSDML	Power Sliding Doors (Left)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68369596AD
PSDMR	Power Sliding Doors (Right)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68369596AD
PLGM	Power Liftgate	CAN-I	68316094AF	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68316094AF
CSWM	Comfort Seat Wheel Module	CAN-I	68434910AC	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68434910AC
IPC	Instrument Panel Cluster	CAN-C	68434956AD	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68434956AD
PTS	Parktronics	CAN-C	68193772AJ	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68193772AJ
SCCM	Steering Column Control Module	CAN-C	68360889AD	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68360889AD
BCM	Body Controller	CAN-C	68424601AF	2C4RC1L7 [REDACTED]	2C4RC1L7X [REDACTED]	68424601AF
RADIO	Radio	CAN-I	68461774AD	2C4RC1 [REDACTED]	2C4RC1L7X [REDACTED]	68461774AD

OCM	Occupant Classification	CAN-C	68403127AA	2C4RC1L7		2C4RC1L7	68403127AA
HVACR	Heat, Ventilation and A/C Rear	CAN-I	68373079AB	2C4RC1L7		2C4RC1L7	68373079AB
LBSS	Left Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7		2C4RC1L7	04672786AB
RBSS	Right Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7		2C4RC1L7	04672786AB
APM	Accessory Power Module	CAN-C	05185046AB	2C4RC1L7		2C4RC1L7	05185046AB
BPCM	Battery Pack Control Module	CAN-C	05193166AD	2C4RC1L7		2C4RC1L7	05193166AD
HCP	Hybrid Control Processor	CAN-C	05190289AC	2C4RC1L7		2C4RC1L7	05190289AC
OBCM	On Board Charging Module	CAN-C	05185047AE	2C4RC1L7		2C4RC1L7	05185047AE
DSM	Display Screen Module	CAN-I	68316175AC	2C4RC1L7		2C4RC1L7	68316175AC
RCCC	Rear Cabin Comfort Controls	CAN-I	6WL30DX9AA	2C4RC1L7		2C4RC1L7	6WL30DX9AA
EAC	Electric A/C Compressor	CAN-C	68237995AG	2C4RC1L7		2C4RC1L7	68237995AG
AHCP	Auxiliary Hybrid Control Processor	CAN-C	05190290AC	2C4RC1L7		2C4RC1L7	05190290AC
EBBM	Electronic Brake Booster Module	CAN-C	68461813AB	2C4RC1L7		2C4RC1L7	68461813AB
ABSO	Anti Lock Brakes OBD	CAN-C	68471122AD	2C4RC1L7		2C4RC1L7	68471122AD
SGW	Security Gateway Module	CAN-C	68447193AB			2C4RC1L7	68447193AB

ECU SUMMARY INFO (CONT...)

ECU	COUNTRY CODE	HARDWARE VERSION	SOFTWARE VERSION	IDENT	CVNS
PCM	USA	1B 47	46 03 01	4419	DFF8E724
ICS	USA	0F 0C 00	12 25 00	4400	
RFH	USA / USA	10 17 00	13 09 00	4A00	
ESM	USA / USA	0F 24 00	12 28 FF	4402	
ORC	USA / USA	12 1A 00	13 2E 00	4301	
EPS	USA / USA	12 2A 00	12 1E 01	4502	
ANC	USA	0F 05 01	12 2C 01	4210	
HVAC	USA	0E 09 00	13 05 01	4401	
DDM	USA	11 07 00	13 0B 00	4202	
PDM	USA	11 07 00	13 0B 00	4202	
DMRL	USA / USA	10 0B 00	12 0C 00	4201	
DMRR	USA / USA	10 0B 00	12 0C 00	4201	
PSDML	USA / USA	10 17 00	14 10 12	4001	
PSDMR	USA / USA	10 17 00	14 10 12	4001	
PLGM	USA	17 19 00	18 22 00	4202	
CSWM	USA	11 2A 00	13 2C 00	4302	
IPC	USA / USA	12 06 00	14 0B 00	4704	

PTS	USA	0E 32 00	12 1F 00	4311	
SCCM	USA	13 28 00	13 29 00	4301	
BCM	USA	0D 11 00	14 1B 90	4415	
RADIO	USA	13 31 14	13 31 14	8205	
OCM	USA / USA	11 1F 01	0E 2F 02	4030	
HVACR	USA	0E 09 00	10 03 02	4301	
LBSS	USA / USA	11 30 02	12 0D 00	4202	
RBSS	USA / USA	11 30 02	12 0D 00	4202	
APM	USA / USA	11 32 00	11 32 00	4001	
BPCM	Not programmed / COUNTRY_SNA	0E 03 00	13 18 03	4005	F5BC8401
HCP	USA	11 1F 04	13 30 01	4005	92BCF62B 04D8393A 050DC953
OBCM	USA	0F 0D 00	12 02 00	4002	
DSM	USA / USA	13 29 00	12 23 00	4000	
RCCC	USA	0F 1D 00	13 04 00	4000	
EAC	USA	0E 34 00	12 0F 00	4102	
AHCP	USA	11 1F 04	13 30 01	4000	
EBBM	USA	0E 19 02	14 0D 18	4000	E5898FA5
ABSO	USA	0E 15 02	14 1B 26	4201	4F158D1B
SGW		5	779	4103	

FLASHES

RRTS

RRT #	DESCRIPTION	STATUS
20-069	2020 RU PHEV ELECTRONIC BRAKE BOOSTER MODULE (EBBM	Complete

RECALLS

RECALL #	DESCRIPTION	STATUS
----------	-------------	--------

DTC SUMMARY

ECU	DTC CODE	DTC DESCRIPTION	STATUS
HCP	P0A3F-00	Drive Motor A Position Sensor 1 Circuit-	Stored
HCP	P0C19-00	Drive Motor A Torque Delivered Performance-	Stored

ENVIRONMENTAL DATA SUMMARY

[HCP](#) | [P0A3F-00](#) | [Stored](#) | [Drive Motor A Position Sensor 1 Circuit-](#)

NAME	VALUE	UNITS
DTC	0A 3F 00	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	True	
Test Failed	False	
Test Failed Since Last Clear	True	

Test Failed This Operation Cycle	False	
Pending DTC	True	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Occurrence flag	Occurrence	
Brake Switch Status	Applied	
Propulsion System Active	False	
PHEV Charging Status	No Charging	
Ignition State	Reserved	
PRND Position Display	N	
Motor A Resolver Offset Learning Status Flag	Applied	
Motor B Resolver Offset Learning Status Flag	Applied	
Motor A Resolver Offset Learn Erase	not requested	
Motor A Resolver to Digital Low Level Driver Faults	No fault	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
Hybrid System State	Reserved	
CBC Wake-Up Input	Off	
EPT LOC Diag Enable	Enable LOC Diagnostic	
HCP ePT Wake-Up Output	On	
HV Contactor Status	Closed	
APM Status	Off	
Impact Event	False	
HCP System Shutdown Command	Default	
OBCM Operating Mode	UTC	
Motor B Resolver Offset Learn Erase	not requested	
J1772 Prox Detected State	Prox Out	
Original Odometer Value	904.9	miles
Most Recent Odometer Value	904.9	miles
Frequency Counter	1	
RAM stamps keyOn	1140	sec
RAM Stamps	35	Min
HV Battery SOC	58	%
Accelerator Pedal Position	0	%
Ignition Cycle Counter	0	
Real time clock	13294248	sec
Barometric Pressure	14	PSI
Motor A Temp Sensor	91	°F
Motor B Resolver Supply Voltage Value	15.75	Volts
Motor B Temp Sensor	97	°F
Engine Speed	1823	rpm
Battery Feed Voltage 2 Sense	14.184	Volts
Motor B Resolver Angle Offset	3.60	Degree
Motor A Resolver Angle Offset	2.00	Degree
Actual Torque - Motor A	0.000	Ft-Lbs

Actual Torque - Motor B	-0.184	Ft-Lbs
Internal EPS Voltage Sense A	8.208	Volts
Vehicle Speed	3.4904	MPH
Motor A Resolver Supply Voltage Value	15.75	Volts
Internal EPS Voltage Sense B	8.136	Volts
Available Regen Torque - Motor B	-235.988	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor B	235.988	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Engine Coolant Temperature	169	°F
Available Regen Torque - Motor A	0.000	Ft-Lbs
Electric Motor B Speed	-405.0	rpm
Commanded Torque - Motor B	1.014	Ft-Lbs
Electric Motor A Speed	7825.0	rpm
Motor A - Inverter Current - phase A	-64	AMP
Battery Feed Voltage 3 Sense	14.040	Volts
Battery Feed Voltage 1 Sense	14.112	Volts
Motor A - Inverter Current - phase B	140	AMP
Motor A - Inverter Current - phase C	-84	AMP
Motor B - Inverter Current - phase C	0	AMP
Outside Air Temperature	41.0	°F
Motor B - Inverter Current - phase A	0	AMP
Motor B - Inverter Current - phase B	4	AMP
PIM DC Link Voltage - B	356	Volts
Inverter A IGBT Temperature for phase C	91	°F
Inverter A IGBT Temperature for phase A	93	°F
HV Battery Voltage from BPCM	357.40	Volts
PIM DC Link Voltage - A	359	Volts
Inverter A IGBT Temperature for phase B	91	°F
Inverter B IGBT Temperature for phase A	91	°F
Inverter B IGBT Temperature for phase B	91	°F
Inverter B IGBT Temperature for phase C	91	°F
Motor B Torque	-0.184	Ft-Lbs
HV Battery Sleep Time	0	Days
UTC Time - Hours	0	Hours
GPS Date - Day	1	Days
UTC Time - Minutes	0	
GPS Date - Month	1	
Motor A Torque	0.000	Ft-Lbs
Distance Travelled with Light ON	0	miles
GPS Date - Year	0	Year
UTC Time - Seconds	0	seconds
ECU Time - Milliseconds	0	ms

HCP | POC19-00 | Stored | Drive Motor A Torque Delivered Performance-

NAME	VALUE	UNITS
Test Failed This Operation Cycle	False	
Test Failed	False	
DTC	0C 19 00	
Pending DTC	True	
Occurrence flag	Occurrence	
Warning Indicator Requested	True	
Test Failed Since Last Clear	True	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Test Not Completed This Operation Cycle	False	
PHEV Charging Status	No Charging	
PRND Position Display	N	
Propulsion System Active	False	
Ignition State	Reserved	
Brake Switch Status	Applied	
Motor A Phase U Short Fault - High-Side	False	
Motor A Phase U Over Current Fault - High-Side	False	
Motor A Phase U Cross Conduction Fault - High-Side	False	
Motor A Phase U Thermal Warning Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - High-Side	False	
Motor A Phase U Short Fault - Low-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase U SPI Error Fault - High-Side	False	
Motor A Phase U Over Current Fault - Low-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase U Hardware Error Fault - High-Side	False	
Motor A Phase U Hardware Error Fault - Low-Side	False	
Motor A Phase U SPI Error Fault - Low-Side	False	
Motor A Phase U Thermal Shutdown Fault - Low-Side	False	
Motor A Phase U Thermal Warning Fault - Low-Side	False	
Motor A Phase U Cross Conduction Fault - Low-Side	False	
Motor A Phase V Short Fault - High-Side	False	
Motor A Phase V Thermal Warning Fault - High-Side	False	
Motor A Phase V Cross Conduction Fault - High-Side	False	
Motor A Phase V Thermal Shutdown Fault - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase V SPI Error Fault - High-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase V Over Current Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - Low-Side	False	
Motor A Phase V Hardware Error Fault - Low-Side	False	
Motor A Phase V Hardware Error Fault - High-Side	False	

Motor A Phase V Thermal Warning Fault - Low-Side	False	
Motor A Phase V Cross Conduction Fault - Low-Side	False	
Motor A Phase V Short Fault - Low-Side	False	
Motor A Phase W Short Fault - High-Side	False	
Motor A Phase V Over Current Fault - High-Side	False	
Motor A Phase W Thermal Warning Fault - High-Side	False	
Motor A Phase W Thermal Shutdown Fault - High-Side	False	
Motor A Phase W Cross Conduction Fault - Low-Side	False	
Motor A Phase W Over Current Fault - Low-Side	False	
Motor A Phase W Short Fault - Low-Side	False	
Motor A Phase W SPI Error Fault - High-Side	False	
Motor A Phase W Over Current Fault - High-Side	False	
Motor A Phase W Hardware Error Fault - High-Side	False	
Motor A Phase W Thermal Warning Fault - Low-Side	False	
Motor A Phase V SPI Error Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - Low-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase W SPI Error Fault - Low-Side	False	
Motor A Phase W Hardware Error Fault - Low-Side	False	
Hybrid System State	Reserved	
Motor A Phase W Comm Error Low Voltage Regulator Fault - Low-Side	False	
Inverter B Status Feedback	Normal On	
HV Contactor Status	Closed	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	Off	
EPT LOC Diag Enable	Enable LOC Diagnostic	
APM Status	Off	
OBCM Operating Mode	UTC	
Impact Event	False	
HCP System Shutdown Command	Default	
Motor A Phase U Under Voltage Fault VH - High-Side	False	
Commanded Inverter A State	Torque Control	
J1772 Prox Detected State	Prox Out	
Motor A Phase U Under Voltage Fault VL - High-Side	False	
Motor A Phase U Over Voltage Fault VH - High-Side	False	
Motor A Phase U Over Voltage Fault VH - Low-Side	False	
Motor A Phase U Under Voltage Fault VH - Low-Side	False	
Motor A Phase U Over Voltage Fault VL - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - High-Side	False	
Inverter Status Feedback	Inverter Faulted	
Motor A Phase U Under Voltage Fault VDD - Low-Side	False	
Motor A Phase U Under Voltage Fault VDD - High-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase U Under Voltage Fault VL - Low-Side	False	

Motor A Phase U Over Voltage Fault VL - Low-Side	False	
Motor A Phase U Over Voltage Fault VDD - Low-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Under Voltage Fault VH - High-Side	False	
Motor A Phase V Over Voltage Fault VDD - High-SideSide	False	
Motor A Phase V Over Voltage Fault VH - Low-Side	False	
Motor A Phase V Over Voltage Fault VH - High-Side	False	
Motor A Phase V Over Voltage Fault VL - High-Side	False	
Motor A Phase V Under Voltage Fault VH - Low-Side	False	
Motor A Phase V Under Voltage Fault VDD - High-Side	False	
Motor A Phase V Under Voltage Fault VL - High-Side	False	
Motor A Phase V Over Voltage Fault VDD - Low-Side	False	
Motor A Phase V Under Voltage Fault VL - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - Low-Side	False	
Motor A Phase W Cross Conduction Fault - High-Side	False	
Motor A Phase W Over Voltage Fault VH - High-Side	False	
Motor A Phase V Under Voltage Fault VDD - Low-Side	False	
Motor A Phase W Under Voltage Fault VL - High-Side	False	
Motor A Phase W Over Voltage Fault VDD - High-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Under Voltage Fault VH - High-Side	False	
Motor A Phase W Over Voltage Fault VL - High-Side	False	
Motor A Phase W Under Voltage Fault VDD - High-Side	False	
Motor A Phase W Over Voltage Fault VL - Low-Side	False	
Motor A Phase W Over Voltage Fault VH - Low-Side	False	
Motor A Phase W Under Voltage Fault VH - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Under Voltage Fault VL - Low-Side	False	
Motor A Phase W Over Voltage Fault VDD - Low-Side	False	
Inverter A Status Feedback	Inverter Faulted	
Motor A Phase W Under Voltage Fault VDD - Low-Side	False	
Original Odometer Value	904.9	miles
RAM stamps keyOn	1140	sec
Frequency Counter	1	
RAM Stamps	35	Min
Ignition Cycle Counter	0	
Real time clock	13294248	sec
Most Recent Odometer Value	904.9	miles
Accelerator Pedal Position	0	%
Vehicle Speed	3.5001	MPH
HV Battery SOC	58	%
Engine Speed	1823	rpm

Available Motor Torque - Motor A	0.000	Ft-Lbs
Motor A - Inverter Current - phase B	-8	AMP
Inverter A Input DC Current	0.0	AMP
Motor A - Inverter Current - phase C	128	AMP
Actual Torque - Motor A	0.000	Ft-Lbs
Barometric Pressure	14	PSI
Motor A - Inverter Current - phase A	-124	AMP
Internal EPS Voltage Sense A	8.208	Volts
Electric Motor A Speed	7805.0	rpm
Engine Coolant Temperature	169	°F
Battery Feed Voltage 3 Sense	14.040	Volts
Motor A Resolver Supply Voltage Value	15.75	Volts
Battery Feed Voltage 2 Sense	14.184	Volts
Low Temp Active Pump Speed	0	rpm
Outside Air Temperature	41.0	°F
PIM DC Link Voltage - B	356	Volts
Passive Pump Coolant Temp In Sensor	84	°F
Internal EPS Voltage Sense B	8.136	Volts
Actual Torque - Motor B	-0.277	Ft-Lbs
Available Motor Torque - Motor B	235.988	Ft-Lbs
High Temp Aux Pump - Actual Speed	5736	rpm
Commanded Torque - Motor A	0.000	Ft-Lbs
Battery Feed Voltage 1 Sense	14.112	Volts
Commanded Torque - Motor B	0.000	Ft-Lbs
Motor B - Inverter Current - phase A	-4	AMP
PIM DC Link Voltage - A	359	Volts
Available Regen Torque - Motor A	0.000	Ft-Lbs
Available Regen Torque - Motor B	-235.988	Ft-Lbs
Motor B Temp Sensor	97	°F
Motor B - Inverter Current - phase B	-4	AMP
Motor B - Inverter Current - phase C	0	AMP
HV Battery Voltage from BPCM	357.30	Volts
Electric Motor B Speed	-394.0	rpm
Inverter B IGBT Temperature for phase C	91	°F
Motor B Resolver Angle	200	Degree
Inverter A IGBT Temperature for phase A	93	°F
Distance Travelled with Light ON	0	miles
Motor B Torque	-0.277	Ft-Lbs
HV Battery Sleep Time	0	Days
Inverter B IGBT Temperature for phase B	91	°F
Inverter A IGBT Temperature for phase B	91	°F
Inverter A IGBT Temperature for phase C	91	°F
Inverter B IGBT Temperature for phase A	91	°F
GPS Date - Month	1	

UTC Time - Hours	0	Hours
Motor A Torque	0.000	Ft-Lbs
UTC Time - Minutes	0	
GPS Date - Day	1	Days
UTC Time - Seconds	0	seconds
ECU Time - Milliseconds	0	ms
GPS Date - Year	0	Year



VEHICLE HEALTH REPORT

Vehicle 2020 CHRYSLER PACIFICA (PHEV) 3.6L V6 HYBRID ENGINE
VIN 2C4RC1L7 [REDACTED]

Odometer 904.5 miles
Publication Date Feb 11, 2021, 11:00:26 AM

ECU SUMMARY INFO

ECU	NAME	BUS TYPE	FLASH PART #	CURRE	ORIGINAL	PART #
PCM	Powertrain Control Module	CAN-C	68444229AE	2C4RC1	2C4RC1L7	68444229AE
ICS	Integrated Center Stack	CAN-I	6UX601X8AA	2C4RC1	2C4RC1L7	6UX601X8AA
RFH	Radio Frequency Hub	CAN-C	68453559AB	2C4RC1	2C4RC1L7	68453559AB
ESM	Electronic Shifter	CAN-C	68240089AM	2C4RC1	2C4RC1L7	68240089AM
ORC	Occupant Restraint	CAN-C	68453076AD	2C4RC1	2C4RC1L7	68453076AD
EPS	Electric Power Steering	CAN-C	68460392AA	2C4RC1	2C4RC1L7	68460392AA
ANC	Active Noise Cancellation	CAN-I	68440556AB	2C4RC1	2C4RC1L7	68440556AB
HVAC	Heat, Ventilation and A/C	CAN-I	68447893AC	2C4RC1	2C4RC1L7	68447893AC
DDM	Driver Door Module	CAN-I	68424451AC	2C4RC1	2C4RC1L7	68424451AC
PDM	Passenger Door Module	CAN-I	68424450AC	2C4RC1	2C4RC1L7	68424450AC
DMRL	Door Module Rear Left	CAN-I	68225096AG	2C4RC1	2C4RC1L7	68225096AG
DMRR	Door Module Rear Right	CAN-I	68225096AG	2C4RC1	2C4RC1L7	68225096AG
PSDML	Power Sliding Doors (Left)	CAN-I	68369596AD	2C4RC1	2C4RC1L7	68369596AD
PSDMR	Power Sliding Doors (Right)	CAN-I	68369596AD	2C4RC1	2C4RC1L7	68369596AD
PLGM	Power Liftgate	CAN-I	68316094AF	2C4RC1	2C4RC1L7	68316094AF
CSWM	Comfort Seat Wheel Module	CAN-I	68434910AC	2C4RC1	2C4RC1L7	68434910AC
IPC	Instrument Panel Cluster	CAN-C	68434956AD	2C4RC1	2C4RC1L7	68434956AD
PTS	Parktronics	CAN-C	68193772AJ	2C4RC1	2C4RC1L7	68193772AJ
SCCM	Steering Column Control Module	CAN-C	68360889AD	2C4RC1	2C4RC1L7	68360889AD
BCM	Body Controller	CAN-C	68424601AF	2C4RC1	2C4RC1L7	68424601AF
RADIO	Radio	CAN-I	68461774AD	2C4RC1	2C4RC1L7	68461774AD

OCM	Occupant Classification	CAN-C	68403127AA	2C4RC1L7		2C4RC1L	68403127AA
HVACR	Heat, Ventilation and A/C Rear	CAN-I	68373079AB	2C4RC1L7		2C4RC1L	68373079AB
LBSS	Left Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7		2C4RC1L	04672786AB
RBSS	Right Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7		2C4RC1L	04672786AB
APM	Accessory Power Module	CAN-C	05185046AB	2C4RC1L7		2C4RC1L	05185046AB
BPCM	Battery Pack Control Module	CAN-C	05193166AD	2C4RC1L7		2C4RC1L	05193166AD
HCP	Hybrid Control Processor	CAN-C	05190289AC	2C4RC1L7		2C4RC1L	05190289AC
OBCM	On Board Charging Module	CAN-C	05185047AE	2C4RC1L7		2C4RC1L	05185047AE
DSM	Display Screen Module	CAN-I	68316175AC	2C4RC1L7		2C4RC1L	68316175AC
RCCC	Rear Cabin Comfort Controls	CAN-I	6WL30DX9AA	2C4RC1L7		2C4RC1L	6WL30DX9AA
EAC	Electric A/C Compressor	CAN-C	68237995AG	2C4RC1L7		2C4RC1L	68237995AG
AHCP	Auxiliary Hybrid Control Processor	CAN-C	05190290AC	2C4RC1L7		2C4RC1L	05190290AC
EBBM	Electronic Brake Booster Module	CAN-C	68461813AB	2C4RC1L7		2C4RC1L	68461813AB
ABSO	Anti Lock Brakes OBD	CAN-C	68471122AD	2C4RC1L7		2C4RC1L	68471122AD
SGW	Security Gateway Module	CAN-C	68447193AB			2C4RC1L	68447193AB

ECU SUMMARY INFO (CONT...)

ECU	COUNTRY CODE	HARDWARE VERSION	SOFTWARE VERSION	IDENT	CVNS
PCM	USA	1B 47	46 03 01	4419	DFF8E724
ICS	USA	0F 0C 00	12 25 00	4400	
RFH	USA / USA	10 17 00	13 09 00	4A00	
ESM	USA / USA	0F 24 00	12 28 FF	4402	
ORC	USA / USA	12 1A 00	13 2E 00	4301	
EPS	USA / USA	12 2A 00	12 1E 01	4502	
ANC	USA	0F 05 01	12 2C 01	4210	
HVAC	USA	0E 09 00	13 05 01	4401	
DDM	USA	11 07 00	13 0B 00	4202	
PDM	USA	11 07 00	13 0B 00	4202	
DMRL	USA / USA	10 0B 00	12 0C 00	4201	
DMRR	USA / USA	10 0B 00	12 0C 00	4201	
PSDML	USA / USA	10 17 00	14 10 12	4001	
PSDMR	USA / USA	10 17 00	14 10 12	4001	
PLGM	USA	17 19 00	18 22 00	4202	
CSWM	USA	11 2A 00	13 2C 00	4302	
IPC	USA / USA	12 06 00	14 0B 00	4704	

PTS	USA	0E 32 00	12 1F 00	4311	
SCCM	USA	13 28 00	13 29 00	4301	
BCM	USA	0D 11 00	14 1B 90	4415	
RADIO	USA	13 31 14	13 31 14	8205	
OCM	USA / USA	11 1F 01	0E 2F 02	4030	
HVACR	USA	0E 09 00	10 03 02	4301	
LBSS	USA / USA	11 30 02	12 0D 00	4202	
RBSS	USA / USA	11 30 02	12 0D 00	4202	
APM	USA / USA	11 32 00	11 32 00	4001	
BPCM	Not programmed / COUNTRY_SNA	0E 03 00	13 18 03	4005	F5BC8401
HCP	USA	11 1F 04	13 30 01	4005	92BCF62B 04D8393A 050DC953
OBCM	USA	0F 0D 00	12 02 00	4002	
DSM	USA / USA	13 29 00	12 23 00	4000	
RCCC	USA	0F 1D 00	13 04 00	4000	
EAC	USA	0E 34 00	12 0F 00	4102	
AHCP	USA	11 1F 04	13 30 01	4000	
EBBM	USA	0E 19 02	14 0D 18	4000	E5898FA5
ABSO	USA	0E 15 02	14 1B 26	4201	4F158D1B
SGW		5	779	4103	

FLASHES

RRTS

RRT #	DESCRIPTION	STATUS
20-069	2020 RU PHEV ELECTRONIC BRAKE BOOSTER MODULE (EBBM	Complete

RECALLS

RECALL #	DESCRIPTION	STATUS
----------	-------------	--------

DTC SUMMARY

ECU	DTC CODE	DTC DESCRIPTION	STATUS
HCP	P06B1-00	Sensor Power Supply 1 Circuit Low-	Active
HCP	P079B-00	Transmission Friction Element 2 Slip Detected-	Active
HCP	P0A3F-00	Drive Motor A Position Sensor 1 Circuit-	Active
HCP	P0A44-00	Drive Motor A Position Sensor 1 Circuit Overspeed-	Active
HCP	P0C19-00	Drive Motor A Torque Delivered Performance-	Active

ENVIRONMENTAL DATA SUMMARY

HCP P06B1-00 Active Sensor Power Supply 1 Circuit Low-		
NAME	VALUE	UNITS
DTC	06 B1 00	
Test Failed	True	

Test Failed This Operation Cycle	True	
Pending DTC	True	
Confirmed DTC	True	
Test Not Completed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Occurrence flag	Occurrence	
Warning Indicator Requested	True	
PHEV Charging Status	No Charging	
Brake Switch Status	Not Applied	
Ignition State	Reserved	
PRND Position Display	P	
Propulsion System Active	False	
Motor A Resolver Offset Learn Erase	not requested	
Motor A Resolver Offset Learning Status Flag	Applied	
Motor B Resolver Offset Learning Status Flag	Applied	
Motor A Resolver to Digital Low Level Driver Faults	Resolver Loss of Signal	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
Hybrid System State	SNA	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	On	
EPT LOC Diag Enable	Enable Limited LOC Diagnostic	
HV Contactor Status	Open	
Impact Event	False	
APM Status	Idle	
HCP System Shutdown Command	Default	
OBCM Operating Mode	UTC	
J1772 Prox Detected State	Prox Out	
Motor B Resolver Offset Learn Erase	not requested	
Original Odometer Value	904.5	miles
Most Recent Odometer Value	904.5	miles
Frequency Counter	1	
Real time clock	13291622	sec
RAM stamps keyOn	75	sec
Accelerator Pedal Position	0	%
Ignition Cycle Counter	0	
RAM Stamps	22740	Min
Engine Speed	0	rpm
HV Battery SOC	57	%
Vehicle Speed	0.0000	MPH
Motor A Temp Sensor	37	°F
Barometric Pressure	14	PSI
Engine Coolant Temperature	32	°F
Motor B Temp Sensor	36	°F

Motor B Resolver Angle Offset	3.60	Degree
Motor A Resolver Angle Offset	2.00	Degree
Motor A Resolver Supply Voltage Value	03FD	Volts
Battery Feed Voltage 2 Sense	12.168	Volts
Motor B Resolver Supply Voltage Value	15.75	Volts
Internal EPS Voltage Sense A	4.176	Volts
Internal EPS Voltage Sense B	2.088	Volts
Actual Torque - Motor A	0.000	Ft-Lbs
Available Regen Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor B	232.301	Ft-Lbs
Actual Torque - Motor B	0.000	Ft-Lbs
Available Regen Torque - Motor B	-232.301	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Commanded Torque - Motor B	0.000	Ft-Lbs
Electric Motor A Speed	0.0	rpm
Electric Motor B Speed	0.0	rpm
Battery Feed Voltage 1 Sense	12.024	Volts
Battery Feed Voltage 3 Sense	11.952	Volts
Motor A - Inverter Current - phase B	0	AMP
Motor B - Inverter Current - phase A	0	AMP
Motor A - Inverter Current - phase C	0	AMP
Motor B - Inverter Current - phase B	0	AMP
Motor A - Inverter Current - phase A	-4	AMP
Motor B - Inverter Current - phase C	0	AMP
Outside Air Temperature	53.6	°F
HV Battery Voltage from BPCM	180.00	Volts
PIM DC Link Voltage - B	4	Volts
PIM DC Link Voltage - A	5	Volts
Inverter A IGBT Temperature for phase A	39	°F
Inverter A IGBT Temperature for phase B	39	°F
Inverter B IGBT Temperature for phase A	39	°F
Inverter A IGBT Temperature for phase C	39	°F
Inverter B IGBT Temperature for phase B	39	°F
Inverter B IGBT Temperature for phase C	39	°F
Distance Travelled with Light ON	0	miles
Motor B Torque	0.000	Ft-Lbs
HV Battery Sleep Time	0	Days
GPS Date - Year	0	Year
Motor A Torque	0.000	Ft-Lbs
GPS Date - Month	1	
GPS Date - Day	1	Days
UTC Time - Hours	0	Hours
UTC Time - Minutes	0	

UTC Time - Seconds	0	seconds
ECU Time - Milliseconds	0	ms

HCP | P079B-00 | Active | Transmission Friction Element 2 Slip Detected-

NAME	VALUE	UNITS
DTC	07 9B 00	
Warning Indicator Requested	False	
Test Not Completed This Operation Cycle	False	
Test Failed This Operation Cycle	True	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Test Failed	True	
Pending DTC	True	
Occurrence flag	Occurrence	
Test Failed Since Last Clear	True	
Brake Switch Status	Not Applied	
Propulsion System Active	False	
Ignition State	Reserved	
PRND Position Display	P	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	On	
HCP SW Version	C19A	
HCP System Shutdown Command	Default	
SW Build Release Version	PIM_C19A_2003B0_RU_HCP__	
EPT LOC Diag Enable	Enable Limited LOC Diagnostic	
HV Contactor Status	Open	
APM Status	Idle	
Impact Event	False	
OBCM Operating Mode	UTC	
J1772 Prox Detected State	Prox Out	
Hybrid System State	SNA	
PHEV Charging Status	No Charging	
Ignition Cycle Counter	0	
Most Recent Odometer Value	904.5	miles
Frequency Counter	1	
Original Odometer Value	904.5	miles
Engine Speed	0	rpm
Real time clock	13291622	sec
Accelerator Pedal Position	0	%
RAM Stamps	22740	Min
RAM stamps keyOn	75	sec
HV Battery SOC	57	%
Motor A Temp Sensor	39	°F
Motor B Temp Sensor	36	°F

Vehicle Speed	0.0000	MPH
Engine Coolant Temperature	32	°F
Barometric Pressure	14	PSI
Actual Torque - Motor A	0.000	Ft-Lbs
Internal EPS Voltage Sense B	8.064	Volts
Motor A Torque	0.000	Ft-Lbs
Motor B Torque	0.000	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Actual Torque - Motor B	0.000	Ft-Lbs
Available Motor Torque - Motor B	232.301	Ft-Lbs
Available Regen Torque - Motor B	-232.301	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Internal EPS Voltage Sense A	8.208	Volts
Motor A - Inverter Current - phase B	0	AMP
Motor B - Inverter Current - phase A	-4	AMP
Motor A - Inverter Current - phase C	-4	AMP
Motor B - Inverter Current - phase B	0	AMP
Motor B - Inverter Current - phase C	-4	AMP
Available Regen Torque - Motor A	0.000	Ft-Lbs
Electric Motor A Speed	0.0	rpm
Motor A - Inverter Current - phase A	-4	AMP
Electric Motor B Speed	0.0	rpm
Commanded Torque - Motor B	0.000	Ft-Lbs
PIM DC Link Voltage - B	14	Volts
PIM DC Link Voltage - A	16	Volts
Outside Air Temperature	53.6	°F
HV Battery Sleep Time	0	Days
Motor A Resolver Angle	112	Degree
Motor B Resolver Angle	6	Degree
HV Battery Voltage from BPCM	180.00	Volts
Battery Feed Voltage 2 Sense	12.096	Volts
Battery Feed Voltage 1 Sense	12.024	Volts
Inverter B IGBT Temperature for phase A	32	°F
Inverter A IGBT Temperature for phase C	32	°F
Inverter B IGBT Temperature for phase B	32	°F
Battery Feed Voltage 3 Sense	11.880	Volts
Inverter B IGBT Temperature for phase C	32	°F
Inverter A IGBT Temperature for phase B	32	°F
GPS Date - Month	1	
UTC Time - Hours	0	Hours
GPS Date - Year	0	Year
Distance Travelled with Light ON	0	miles
UTC Time - Seconds	0	seconds
UTC Time - Minutes	0	

Inverter A IGBT Temperature for phase A	32	°F
GPS Date - Day	1	Days
ECU Time - Milliseconds	0	ms

HCP | POA3F-00 | Active | Drive Motor A Position Sensor 1 Circuit-

NAME	VALUE	UNITS
DTC	0A 3F 00	
Test Failed	True	
Test Failed This Operation Cycle	True	
Pending DTC	True	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	True	
Test Failed Since Last Clear	True	
Occurrence flag	Occurrence	
PHEV Charging Status	No Charging	
Brake Switch Status	Not Applied	
Ignition State	Reserved	
Propulsion System Active	False	
PRND Position Display	P	
Motor A Resolver Offset Learn Erase	not requested	
Motor A Resolver Offset Learning Status Flag	Applied	
Motor B Resolver Offset Learning Status Flag	Applied	
Motor A Resolver to Digital Low Level Driver Faults	Resolver Loss of Signal	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
Hybrid System State	SNA	
CBC Wake-Up Input	On	
HCP ePT Wake-Up Output	On	
EPT LOC Diag Enable	Enable Limited LOC Diagnostic	
HV Contactor Status	Open	
Impact Event	False	
APM Status	Idle	
HCP System Shutdown Command	Default	
J1772 Prox Detected State	Prox Out	
Motor B Resolver Offset Learn Erase	not requested	
OBCM Operating Mode	UTC	
Original Odometer Value	904.5	miles
Ignition Cycle Counter	0	
Most Recent Odometer Value	904.5	miles
RAM stamps keyOn	75	sec
Real time clock	13291622	sec
Frequency Counter	1	
Accelerator Pedal Position	0	%

RAM Stamps	22740	Min
HV Battery SOC	57	%
Engine Speed	0	rpm
Vehicle Speed	0.0000	MPH
Motor A Temp Sensor	39	°F
Motor B Temp Sensor	36	°F
Engine Coolant Temperature	32	°F
Barometric Pressure	14	PSI
Motor A Resolver Angle Offset	2.00	Degree
Motor B Resolver Angle Offset	3.60	Degree
Motor B Resolver Supply Voltage Value	15.75	Volts
Battery Feed Voltage 2 Sense	12.168	Volts
Motor A Resolver Supply Voltage Value	03FD	Volts
Internal EPS Voltage Sense A	4.392	Volts
Internal EPS Voltage Sense B	2.304	Volts
Actual Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor A	0.830	Ft-Lbs
Available Regen Torque - Motor A	-0.830	Ft-Lbs
Actual Torque - Motor B	0.092	Ft-Lbs
Available Motor Torque - Motor B	232.301	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Commanded Torque - Motor B	0.000	Ft-Lbs
Available Regen Torque - Motor B	-232.301	Ft-Lbs
Electric Motor A Speed	0.0	rpm
Electric Motor B Speed	0.0	rpm
Battery Feed Voltage 3 Sense	11.952	Volts
Battery Feed Voltage 1 Sense	12.024	Volts
Motor A - Inverter Current - phase A	-4	AMP
Motor A - Inverter Current - phase B	0	AMP
Motor B - Inverter Current - phase A	0	AMP
Motor A - Inverter Current - phase C	0	AMP
Motor B - Inverter Current - phase C	-4	AMP
Motor B - Inverter Current - phase B	0	AMP
Outside Air Temperature	53.6	°F
Inverter A IGBT Temperature for phase A	39	°F
PIM DC Link Voltage - B	4	Volts
Inverter A IGBT Temperature for phase B	39	°F
HV Battery Voltage from BPCM	180.00	Volts
PIM DC Link Voltage - A	5	Volts
Inverter B IGBT Temperature for phase A	39	°F
Inverter A IGBT Temperature for phase C	39	°F
Inverter B IGBT Temperature for phase B	39	°F
Inverter B IGBT Temperature for phase C	39	°F
Motor A Torque	0.000	Ft-Lbs

Distance Travelled with Light ON	0	miles
Motor B Torque	0.092	Ft-Lbs
HV Battery Sleep Time	0	Days
GPS Date - Year	0	Year
GPS Date - Month	1	
GPS Date - Day	1	Days
UTC Time - Minutes	0	
UTC Time - Hours	0	Hours
ECU Time - Milliseconds	0	ms
UTC Time - Seconds	0	seconds

HCP | P0A44-00 | Active | Drive Motor A Position Sensor 1 Circuit Overspeed-

NAME	VALUE	UNITS
DTC	0A 44 00	
Test Failed	True	
Test Failed This Operation Cycle	True	
Pending DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Confirmed DTC	False	
Warning Indicator Requested	False	
Occurrence flag		
Brake Switch Status		
PHEV Charging Status		
Ignition State		
PRND Position Display		
Propulsion System Active		
Motor A Resolver Offset Learning Status Flag		
Motor A Resolver Offset Learn Erase		
Motor B Resolver Offset Learning Status Flag		
Motor A Resolver to Digital Low Level Driver Faults		
Motor B Resolver to Digital Low Level Driver Faults		
Hybrid System State		
HCP ePT Wake-Up Output		
EPT LOC Diag Enable		
CBC Wake-Up Input		
HV Contactor Status		
APM Status		
Impact Event		
HCP System Shutdown Command		
OBCM Operating Mode		
J1772 Prox Detected State		
Motor B Resolver Offset Learn Erase		

Original Odometer Value		miles
Most Recent Odometer Value		miles
Frequency Counter		
Real time clock		sec
Ignition Cycle Counter		
RAM Stamps		Min
Accelerator Pedal Position		%
RAM stamps keyOn		sec
Engine Speed		rpm
HV Battery SOC		%
Vehicle Speed		MPH
Motor B Temp Sensor		°F
Motor A Temp Sensor		°F
Motor A Resolver Angle Offset		Degree
Barometric Pressure		PSI
Engine Coolant Temperature		°F
Motor B Resolver Angle Offset		Degree
Motor B Resolver Supply Voltage Value		Volts
Motor A Resolver Supply Voltage Value		Volts
Battery Feed Voltage 2 Sense		Volts
Internal EPS Voltage Sense A		Volts
Internal EPS Voltage Sense B		Volts
Actual Torque - Motor A		Ft-Lbs
Available Motor Torque - Motor A		Ft-Lbs
Available Motor Torque - Motor B		Ft-Lbs
Actual Torque - Motor B		Ft-Lbs
Available Regen Torque - Motor A		Ft-Lbs
Commanded Torque - Motor A		Ft-Lbs
Commanded Torque - Motor B		Ft-Lbs
Available Regen Torque - Motor B		Ft-Lbs
Electric Motor A Speed		rpm
Electric Motor B Speed		rpm
Battery Feed Voltage 1 Sense		Volts
Motor A - Inverter Current - phase B		AMP
Motor A - Inverter Current - phase A		AMP
Battery Feed Voltage 3 Sense		Volts
Motor B - Inverter Current - phase A		AMP
Motor A - Inverter Current - phase C		AMP
Motor B - Inverter Current - phase C		AMP
Outside Air Temperature		°F
Motor B - Inverter Current - phase B		AMP
PIM DC Link Voltage - A		Volts
PIM DC Link Voltage - B		Volts
Inverter A IGBT Temperature for phase A		°F

HV Battery Voltage from BPCM		Volts
Inverter B IGBT Temperature for phase A		°F
Inverter A IGBT Temperature for phase C		°F
Inverter A IGBT Temperature for phase B		°F
Inverter B IGBT Temperature for phase B		°F
Inverter B IGBT Temperature for phase C		°F
Distance Travelled with Light ON		miles
Motor B Torque		Ft-Lbs
Motor A Torque		Ft-Lbs
HV Battery Sleep Time		Days
GPS Date - Year		Year
UTC Time - Hours		Hours
GPS Date - Month		
UTC Time - Minutes		
GPS Date - Day		Days
UTC Time - Seconds		seconds
ECU Time - Milliseconds		ms

HCP | P0C19-00 | Active | Drive Motor A Torque Delivered Performance-

NAME	VALUE	UNITS
DTC	0C 19 00	
Test Failed	True	
Test Failed This Operation Cycle	True	
Pending DTC	True	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Occurrence flag	Occurrence	
Warning Indicator Requested	True	
PHEV Charging Status	No Charging	
Brake Switch Status	Not Applied	
Ignition State	Reserved	
Propulsion System Active	False	
PRND Position Display	P	
Motor A Phase U Short Fault - High-Side	False	
Motor A Phase U Cross Conduction Fault - High-Side	False	
Motor A Phase U Over Current Fault - High-Side	False	
Motor A Phase U Thermal Warning Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - High-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase U Short Fault - Low-Side	False	
Motor A Phase U Hardware Error Fault - High-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - High-Side	False	

Motor A Phase U Over Current Fault - Low-Side	False	
Motor A Phase U Thermal Warning Fault - Low-Side	False	
Motor A Phase U SPI Error Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - Low-Side	False	
Motor A Phase U Cross Conduction Fault - Low-Side	False	
Motor A Phase U Hardware Error Fault - Low-Side	False	
Motor A Phase V Short Fault - High-Side	False	
Motor A Phase V Cross Conduction Fault - High-Side	False	
Motor A Phase V Over Current Fault - High-Side	False	
Motor A Phase V Thermal Warning Fault - High-Side	False	
Motor A Phase U SPI Error Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase V Cross Conduction Fault - Low-Side	False	
Motor A Phase V Over Current Fault - Low-Side	False	
Motor A Phase V Thermal Warning Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - Low-Side	False	
Motor A Phase V Short Fault - Low-Side	False	
Motor A Phase V Hardware Error Fault - Low-Side	False	
Motor A Phase W Short Fault - High-Side	False	
Motor A Phase V SPI Error Fault - Low-Side	False	
Motor A Phase W Thermal Warning Fault - High-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase W Over Current Fault - High-Side	False	
Motor A Phase W Hardware Error Fault - High-Side	False	
Motor A Phase V Hardware Error Fault - High-Side	False	
Motor A Phase W Short Fault - Low-Side	False	
Motor A Phase V SPI Error Fault - High-Side	False	
Motor A Phase W Cross Conduction Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - High-Side	False	
Motor A Phase W Thermal Warning Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - Low-Side	False	
Motor A Phase W Over Current Fault - Low-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Hardware Error Fault - Low-Side	False	
Motor A Phase W SPI Error Fault - High-Side	False	
Hybrid System State	SNA	
Motor A Phase W SPI Error Fault - Low-Side	False	
HV Contactor Status	Open	
Inverter B Status Feedback	Normal OFF	
CBC Wake-Up Input	On	
EPT LOC Diag Enable	Enable Limited LOC Diagnostic	
HCP ePT Wake-Up Output	On	

APM Status	Idle	
Impact Event	False	
HCP System Shutdown Command	Default	
OBCM Operating Mode	UTC	
J1772 Prox Detected State	Prox Out	
Inverter Status Feedback	Inverter Faulted	
Commanded Inverter A State	Inverter Disabled	
Motor A Phase U Under Voltage Fault VH - High-Side	False	
Motor A Phase U Over Voltage Fault VH - High-Side	False	
Motor A Phase U Under Voltage Fault VL - High-Side	False	
Motor A Phase U Over Voltage Fault VL - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - High-Side	False	
Motor A Phase U Over Voltage Fault VH - Low-Side	False	
Motor A Phase U Under Voltage Fault VL - Low-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase U Under Voltage Fault VDD - Low-Side	False	
Motor A Phase U Over Voltage Fault VL - Low-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase U Under Voltage Fault VH - Low-Side	False	
Motor A Phase U Over Voltage Fault VDD - Low-Side	False	
Motor A Phase V Over Voltage Fault VH - High-Side	False	
Motor A Phase V Under Voltage Fault VH - High-Side	False	
Motor A Phase V Over Voltage Fault VL - High-Side	False	
Motor A Phase V Under Voltage Fault VL - High-Side	False	
Motor A Phase U Under Voltage Fault VDD - High-Side	False	
Motor A Phase V Over Voltage Fault VDD - High-SideSide	False	
Motor A Phase V Over Voltage Fault VDD - Low-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Under Voltage Fault VDD - Low-Side	False	
Motor A Phase V Under Voltage Fault VDD - High-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Cross Conduction Fault - High-Side	False	
Motor A Phase V Under Voltage Fault VH - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - Low-Side	False	
Motor A Phase V Under Voltage Fault VL - Low-Side	False	
Motor A Phase W Over Voltage Fault VH - High-Side	False	
Motor A Phase W Under Voltage Fault VH - High-Side	False	
Motor A Phase W Over Voltage Fault VL - High-Side	False	
Motor A Phase V Over Voltage Fault VH - Low-Side	False	
Motor A Phase W Under Voltage Fault VDD - High-Side	False	
Motor A Phase W Over Voltage Fault VDD - High-Side	False	
Motor A Phase W Over Voltage Fault VH - Low-Side	False	
Motor A Phase W Under Voltage Fault VL - High-Side	False	
Motor A Phase W Over Voltage Fault VL - Low-Side	False	

Motor A Phase W Under Voltage Fault VH - Low-Side	False	
Motor A Phase W Under Voltage Fault VL - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase W Under Voltage Fault VDD - Low-Side	False	
Motor A Phase W Over Voltage Fault VDD - Low-Side	False	
Inverter A Status Feedback	Inverter Faulted	
RAM Stamps	22740	Min
Real time clock	13291622	sec
Most Recent Odometer Value	904.5	miles
Frequency Counter	1	
Original Odometer Value	904.5	miles
Ignition Cycle Counter	0	
Accelerator Pedal Position	0	%
RAM stamps keyOn	75	sec
Engine Speed	0	rpm
Barometric Pressure	14	PSI
Engine Coolant Temperature	32	°F
Electric Motor A Speed	0.0	rpm
HV Battery SOC	57	%
Actual Torque - Motor A	0.000	Ft-Lbs
Motor A - Inverter Current - phase C	-4	AMP
Motor A - Inverter Current - phase B	0	AMP
Available Motor Torque - Motor A	1.475	Ft-Lbs
Motor A - Inverter Current - phase A	0	AMP
Motor A Resolver Supply Voltage Value	03FD	Volts
Vehicle Speed	0.0000	MPH
Inverter A Input DC Current	0.0	AMP
Battery Feed Voltage 2 Sense	12.168	Volts
Internal EPS Voltage Sense B	2.304	Volts
Internal EPS Voltage Sense A	4.392	Volts
Passive Pump Coolant Temp In Sensor	39	°F
Low Temp Active Pump Speed	0	rpm
PIM DC Link Voltage - B	4	Volts
Battery Feed Voltage 3 Sense	11.952	Volts
PIM DC Link Voltage - A	5	Volts
High Temp Aux Pump - Actual Speed	0	rpm
Outside Air Temperature	53.6	°F
Actual Torque - Motor B	0.092	Ft-Lbs
Available Regen Torque - Motor A	-1.475	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Available Regen Torque - Motor B	-232.301	Ft-Lbs
Battery Feed Voltage 1 Sense	12.024	Volts
Commanded Torque - Motor B	0.000	Ft-Lbs

Available Motor Torque - Motor B	232.301	Ft-Lbs
Motor B - Inverter Current - phase A	0	AMP
Motor B Resolver Angle	6	Degree
Motor B - Inverter Current - phase B	0	AMP
Motor B Temp Sensor	36	°F
Inverter A IGBT Temperature for phase B	39	°F
Motor B - Inverter Current - phase C	-4	AMP
Inverter B IGBT Temperature for phase A	39	°F
Inverter B IGBT Temperature for phase B	39	°F
Inverter B IGBT Temperature for phase C	39	°F
Inverter A IGBT Temperature for phase C	39	°F
Distance Travelled with Light ON	0	miles
HV Battery Voltage from BPCM	180.00	Volts
Inverter A IGBT Temperature for phase A	39	°F
Electric Motor B Speed	0.0	rpm
HV Battery Sleep Time	0	Days
Motor A Torque	0.000	Ft-Lbs
GPS Date - Day	1	Days
UTC Time - Hours	0	Hours
GPS Date - Month	1	
GPS Date - Year	0	Year
Motor B Torque	0.092	Ft-Lbs
UTC Time - Minutes	0	
ECU Time - Milliseconds	0	ms
UTC Time - Seconds	0	seconds



VEHICLE SCAN REPORT

Vehicle 2020 CHRYSLER PACIFICA (PHEV) 3.6L V6 HYBRID ENGINE
VIN 2C4RC1L7 [REDACTED]

Odometer 904.2 miles
Publication Date Mon, 08 Feb 2021 21:11:35 GMT

ECU SUMMARY INFO

ECU	NAME	BUS TYPE	FLASH PART #	CURRENT	ORIGINAL	PART #
PCM	Powertrain Control Module	CAN-C	68444229AE	2C4RC1	2C4RC1L7	68444229AE
ICS	Integrated Center Stack	CAN-I	6UX601X8AA	2C4RC1	2C4RC1L7	6UX601X8AA
RFH	Radio Frequency Hub	CAN-C	68453559AB	2C4RC1	2C4RC1L7	68453559AB
ESM	Electronic Shifter	CAN-C	68240089AM	2C4RC1	2C4RC1L7	68240089AM
ORC	Occupant Restraint	CAN-C	68453076AD	2C4RC1	2C4RC1L7	68453076AD
EPS	Electric Power Steering	CAN-C	68460392AA	2C4RC1	2C4RC1L7	68460392AA
ANC	Active Noise Cancellation	CAN-I	68440556AB	2C4RC1	2C4RC1L7	68440556AB
HVAC	Heat, Ventilation and A/C	CAN-I	68447893AC	2C4RC1	2C4RC1L7	68447893AC
DDM	Driver Door Module	CAN-I	68424451AC	2C4RC1	2C4RC1L7	68424451AC
PDM	Passenger Door Module	CAN-I	68424450AC	2C4RC1	2C4RC1L7	68424450AC
DMRL	Door Module Rear Left	CAN-I	68225096AG	2C4RC1	2C4RC1L7	68225096AG
DMRR	Door Module Rear Right	CAN-I	68225096AG	2C4RC1	2C4RC1L7	68225096AG
PSDML	Power Sliding Doors (Left)	CAN-I	68369596AD	2C4RC1	2C4RC1L7	68369596AD
PSDMR	Power Sliding Doors (Right)	CAN-I	68369596AD	2C4RC1	2C4RC1L7	68369596AD
PLGM	Power Liftgate	CAN-I	68316094AF	2C4RC1	2C4RC1L7	68316094AF
CSWM	Comfort Seat Wheel Module	CAN-I	68434910AC	2C4RC1	2C4RC1L7	68434910AC
IPC	Instrument Panel Cluster	CAN-C	68434956AD	2C4RC1	2C4RC1L7	68434956AD
PTS	Parktronics	CAN-C	68193772AJ	2C4RC1	2C4RC1L7	68193772AJ
SCCM	Steering Column Control Module	CAN-C	68360889AD	2C4RC1	2C4RC1L7	68360889AD
BCM	Body Controller	CAN-C	68424601AF	2C4RC1	2C4RC1L7	68424601AF
RADIO	Radio	CAN-I	68461774AD	2C4RC1	2C4RC1L7	68461774AD

OCM	Occupant Classification	CAN-C	68403127AA	2C4RC1L		2C4RC1L7	68403127AA
HVACR	Heat, Ventilation and A/C Rear	CAN-I	68373079AB	2C4RC1L		2C4RC1L7	68373079AB
LBSS	Left Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L		2C4RC1L7	04672786AB
RBSS	Right Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L		2C4RC1L7	04672786AB
APM	Accessory Power Module	CAN-C	05185046AB	2C4RC1L		2C4RC1L7	05185046AB
BPCM	Battery Pack Control Module	CAN-C	05193166AD	2C4RC1L		2C4RC1L7	05193166AD
HCP	Hybrid Control Processor	CAN-C	05190289AC	2C4RC1L		2C4RC1L7	05190289AC
OBCM	On Board Charging Module	CAN-C	05185047AE	2C4RC1L		2C4RC1L7	05185047AE
DSM	Display Screen Module	CAN-I	68316175AC	2C4RC1L		2C4RC1L7	68316175AC
RCCC	Rear Cabin Comfort Controls	CAN-I	6WL30DX9AA	2C4RC1L		2C4RC1L7	6WL30DX9AA
EAC	Electric A/C Compressor	CAN-C	68237995AG	2C4RC1L		2C4RC1L7	68237995AG
AHCP	Auxiliary Hybrid Control Processor	CAN-C	05190290AC	2C4RC1L		2C4RC1L7	05190290AC
EBBM	Electronic Brake Booster Module	CAN-C	68461813AB	2C4RC1L		2C4RC1L7	68461813AB
ABSO	Anti Lock Brakes OBD	CAN-C	68471122AD	2C4RC1L		2C4RC1L7	68471122AD
SGW	Security Gateway Module	CAN-C	68447193AB			2C4RC1L7	68447193AB

ECU SUMMARY INFO (CONT...)

ECU	COUNTRY CODE	HARDWARE VERSION	SOFTWARE VERSION	IDENT	CVNS
PCM	USA	1B 47	46 03 01	4419	DFF8E724
ICS	USA	0F 0C 00	12 25 00	4400	
RFH	USA / USA	10 17 00	13 09 00	4A00	
ESM	USA / USA	0F 24 00	12 28 FF	4402	
ORC	USA / USA	12 1A 00	13 2E 00	4301	
EPS	USA / USA	12 2A 00	12 1E 01	4502	
ANC	USA	0F 05 01	12 2C 01	4210	
HVAC	USA	0E 09 00	13 05 01	4401	
DDM	USA	11 07 00	13 0B 00	4202	
PDM	USA	11 07 00	13 0B 00	4202	
DMRL	USA / USA	10 0B 00	12 0C 00	4201	
DMRR	USA / USA	10 0B 00	12 0C 00	4201	
PSDML	USA / USA	10 17 00	14 10 12	4001	
PSDMR	USA / USA	10 17 00	14 10 12	4001	
PLGM	USA	17 19 00	18 22 00	4202	
CSWM	USA	11 2A 00	13 2C 00	4302	
IPC	USA / USA	12 06 00	14 0B 00	4704	

PTS	USA	0E 32 00	12 1F 00	4311	
SCCM	USA	13 28 00	13 29 00	4301	
BCM	USA	0D 11 00	14 1B 90	4415	
RADIO	USA	13 31 14	13 31 14	8205	
OCM	USA / USA	11 1F 01	0E 2F 02	4030	
HVACR	USA	0E 09 00	10 03 02	4301	
LBSS	USA / USA	11 30 02	12 0D 00	4202	
RBSS	USA / USA	11 30 02	12 0D 00	4202	
APM	USA / USA	11 32 00	11 32 00	4001	
BPCM	Not programmed / COUNTRY_SNA	0E 03 00	13 18 03	4005	F5BC8401
HCP	USA	11 1F 04	13 30 01	4005	92BCF62B 04D8393A 050DC953
OBCM	USA	0F 0D 00	12 02 00	4002	
DSM	USA / USA	13 29 00	12 23 00	4000	
RCCC	USA	0F 1D 00	13 04 00	4000	
EAC	USA	0E 34 00	12 0F 00	4102	
AHCP	USA	11 1F 04	13 30 01	4000	
EBBM	USA	0E 19 02	14 0D 18	4000	E5898FA5
ABSO	USA	0E 15 02	14 1B 26	4201	4F158D1B
SGW		5	779	4103	

DTC SUMMARY

ECU	DTC CODE	DTC DESCRIPTION	STATUS
RFH	B2199-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
ESM	P1C8C-16	System Voltage-Circuit Voltage Below Threshold	Stored
ESM	P1C8B-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
ESM	U0594-00	Implausible Data Received From Hybrid Control Module "A"-	Stored
ANC	B2199-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
ANC	B21DD-84	System Voltage-Signal Below Allowable Range	Stored
ANC	B143B-12	ANC Microphone 1-Circuit Short to Battery	Stored
ANC	B143C-12	ANC Microphone 2-Circuit Short to Battery	Stored
ANC	B143E-12	ANC Microphone 3-Circuit Short to Battery	Stored
ANC	B143F-12	ANC Microphone 4-Circuit Short to Battery	Stored
PSDML	B2199-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
PSDMR	B2199-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
PLGM	B21DD-16	System Voltage-Circuit Voltage Below Threshold	Stored
PLGM	B2199-16	Battery Voltage-Circuit Voltage Below Threshold	Stored
IPC	B1612-00	Panel Illumination Control-	Stored
RADIO	B280B-00	NTSC Video Input-	Stored
HCP	P1444-00	Power Inverter Module - Incorrect Control Mode-	Stored
HCP	P06B1-00	Sensor Power Supply 1 Circuit Low-	Stored
HCP	P0A3F-00	Drive Motor A Position Sensor 1 Circuit-	Stored
HCP	P0A44-00	Drive Motor A Position Sensor 1 Circuit Overspeed-	Pending
HCP	P0C19-00	Drive Motor A Torque Delivered Performance-	Stored

ABSO	C2222-00	Improper Powerdown-	Stored
------	----------	---------------------	--------

ENVIRONMENTAL DATA SUMMARY

RFH | B2199-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	False	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Frequency Counter	1	
Most Recent Odometer Value	895	miles
Original Odometer Value	895	miles
Ignition Cycle Counter	11	

ESM | P1C8C-16 | Stored | System Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Test Failed	False	
DTC	1C 8C 16	
Test Failed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
Pending DTC	False	
Test Not Completed This Operation Cycle	False	
Confirmed DTC	True	
Warning Indicator Requested	False	
Test Failed Since Last Clear	True	
Occurrence flag	Occurrence	
Ignition Status	Ignition Lock	
Original Odometer Value	895	miles
Most Recent Odometer Value	Odometer value not available / Default	miles
Operation Time	3849	Min
Ignition Cycle Counter	6	
Frequency Counter	9	
Operating Voltage	10.1	Volts

ESM | P1C8B-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
DTC	1C 8B 16	

Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
Test Failed Since Last Clear	True	
Occurrence flag	Occurrence	
Ignition Status	Ignition Lock	
Most Recent Odometer Value	Odometer value not available / Default	miles
Frequency Counter	9	
Original Odometer Value	895	miles
Ignition Cycle Counter	6	
Operating Voltage	10.0	Volts
Operation Time	3850	Min

ESM | U0594-00 | Stored | Implausible Data Received From Hybrid Control Module "A"-

NAME	VALUE	UNITS
DTC	C5 94 00	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed	False	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
Occurrence flag	Occurrence	
Test Failed Since Last Clear	True	
Ignition Status	Ignition Lock	
Sub-Faults	00	
Original Odometer Value	895	miles
Operating Voltage	12.4	Volts
Frequency Counter	1	
Ignition Cycle Counter	7	
Most Recent Odometer Value	895	miles
Operation Time	3886	Min

ANC | B2199-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
DTC	A1 99 16	
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	

Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Original Odometer Value	Odometer value not available / Default	miles
Most Recent Odometer Value	Odometer value not available / Default	miles
Frequency Counter	2	
Ignition Cycle Counter	4	

ANC | B21DD-84 | Stored | System Voltage-Signal Below Allowable Range

NAME	VALUE	UNITS
DTC	A1 DD 84	
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Warning Indicator Requested	False	
Test Not Completed This Operation Cycle	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Original Odometer Value	Odometer value not available / Default	miles
Frequency Counter	4	
Ignition Cycle Counter	4	
Most Recent Odometer Value	Odometer value not available / Default	miles

ANC | B143B-12 | Stored | ANC Microphone 1-Circuit Short to Battery

NAME	VALUE	UNITS
Test Failed	False	
DTC	94 3B 12	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Original Odometer Value	Odometer value not available / Default	miles

Most Recent Odometer Value	Odometer value not available / Default	miles
Ignition Cycle Counter	4	
Frequency Counter	9	

ANC | B143C-12 | Stored | ANC Microphone 2-Circuit Short to Battery

NAME	VALUE	UNITS
DTC	94 3C 12	
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Original Odometer Value	Odometer value not available / Default	miles
Most Recent Odometer Value	Odometer value not available / Default	miles
Frequency Counter	9	
Ignition Cycle Counter	4	

ANC | B143E-12 | Stored | ANC Microphone 3-Circuit Short to Battery

NAME	VALUE	UNITS
DTC	94 3E 12	
Test Failed	False	
Test Failed This Operation Cycle	False	
Confirmed DTC	True	
Pending DTC	False	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
DTC Extended Data Record Number - All	01	
Warning Indicator Requested	False	
Occurrence flag	Error	
Original Odometer Value	Odometer value not available / Default	miles
Most Recent Odometer Value	Odometer value not available / Default	miles
Frequency Counter	9	
Ignition Cycle Counter	4	

ANC | B143F-12 | Stored | ANC Microphone 4-Circuit Short to Battery

NAME	VALUE	UNITS
DTC	94 3F 12	
Test Failed	False	

Test Failed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Pending DTC	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	01	
Occurrence flag	Error	
Most Recent Odometer Value	Odometer value not available / Default	miles
Frequency Counter	9	
Original Odometer Value	Odometer value not available / Default	miles
Ignition Cycle Counter	4	

PSDML | B2199-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Test Not Completed Since Last Clear	False	
Test Failed	False	
Confirmed DTC	True	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Test Failed Since Last Clear	True	
Warning Indicator Requested	False	
DTC Extended Data Record Number - All	FF	
Occurrence flag	Occurrence	
Test Not Completed This Operation Cycle	False	
Original Odometer Value	895	miles
Most Recent Odometer Value	895	miles
Frequency Counter	1	
Ignition Cycle Counter	11	

PSDMR | B2199-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Confirmed DTC	True	
Pending DTC	False	
Test Failed	False	
Test Failed This Operation Cycle	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
DTC Extended Data Record Number - All	FF	
Occurrence flag	Occurrence	
Warning Indicator Requested	False	
Frequency Counter	1	

Original Odometer Value	895	miles
Most Recent Odometer Value	895	miles
Ignition Cycle Counter	11	

PLGM | B21DD-16 | Stored | System Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Test Failed	False	
Pending DTC	False	
Confirmed DTC	True	
Test Failed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
Occurrence flag	Occurrence	
Original Odometer Value	895	miles
Most Recent Odometer Value	895	miles
Operation Cycle Counter	0	
Frequency Counter	5	

PLGM | B2199-16 | Stored | Battery Voltage-Circuit Voltage Below Threshold

NAME	VALUE	UNITS
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	False	
Occurrence flag	Error	
Original Odometer Value	895	miles
Most Recent Odometer Value	895	miles
Frequency Counter	6	
Operation Cycle Counter	0	

IPC | B1612-00 | Stored | Panel Illumination Control-

NAME	VALUE	UNITS
Pending DTC	False	
Confirmed DTC	True	
Test Failed	False	
Test Not Completed Since Last Clear	False	
Test Failed This Operation Cycle	False	
Test Not Completed This Operation Cycle	False	

Warning Indicator Requested	False	
DTC Extended Data Record Number - All	FF	
Occurrence flag	Error	
Test Failed Since Last Clear	True	
Original Odometer Value	895	miles
Most Recent Odometer Value	895	miles
Frequency Counter	1	
Ignition Cycle Counter	6	

RADIO | B280B-00 | Stored | NTSC Video Input-

NAME	VALUE	UNITS
TestFailedThisMonitoringCycle	False	
Pending DTC	False	
Confirmed DTC	True	
TestFailed	False	
DTCTable	A8 0B 00	
Warning Indicator Requested	False	
DTCExtendedDataRecordNumber	FF	
Test Not Completed This Monitoring Cycle	False	
Reserved	Reserved	
Event Counter	5E	
Occurance Flag	Occurrence	
RDI \$6080	60 80	
Most Recent Odometer Value	895	miles
Ignition Counter	6	
Frequency Counter	255	
Original Odometer Value	10	miles

HCP | P1444-00 | Stored | Power Inverter Module - Incorrect Control Mode-

NAME	VALUE	UNITS
DTC	14 44 00	
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Warning Indicator Requested	True	
Occurrence flag	Occurrence	
Confirmed DTC	True	
Brake Switch Status	Not Applied	
PRND Position Display	P	
Propulsion System Active	False	
Ignition State	Ignition Lock	

HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	On	
HCP System Shutdown Command	Default	
SW Build Release Version	PIM_C19A_2003B0_RU_HCP__	
EPT LOC Diag Enable	Enable Limited LOC Diagnostic	
HCP SW Version	C19A	
APM Status	Off	
HV Contactor Status	Closed	
Impact Event	False	
OBCM Operating Mode	UTC	
J1772 Prox Detected State	Prox Out	
Hybrid System State	Enable Inverters	
PHEV Charging Status	No Charging	
Most Recent Odometer Value	904.2	miles
Original Odometer Value	904.2	miles
Real time clock	13041260	sec
RAM stamps keyOn	30	sec
RAM Stamps	22183	Min
Ignition Cycle Counter	0	
HV Battery SOC	24	%
Accelerator Pedal Position	0	%
Vehicle Speed	0.0000	MPH
Engine Speed	0	rpm
Engine Coolant Temperature	34	°F
Motor A Temp Sensor	34	°F
Motor B Temp Sensor	28	°F
Frequency Counter	5	
Internal EPS Voltage Sense A	8.208	Volts
Barometric Pressure	14	PSI
Motor B Torque	0.000	Ft-Lbs
Actual Torque - Motor B	0.000	Ft-Lbs
Motor A Torque	0.000	Ft-Lbs
Internal EPS Voltage Sense B	8.064	Volts
Actual Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Available Regen Torque - Motor A	0.000	Ft-Lbs
Motor A - Inverter Current - phase A	0	AMP
Available Motor Torque - Motor B	232.301	Ft-Lbs
Motor A - Inverter Current - phase B	-4	AMP
Available Regen Torque - Motor B	-232.301	Ft-Lbs
Commanded Torque - Motor B	0.000	Ft-Lbs
Motor B - Inverter Current - phase A	36	AMP
Motor B - Inverter Current - phase B	16	AMP
Motor B - Inverter Current - phase C	-60	AMP

Motor B Resolver Angle	46	Degree
Electric Motor A Speed	15431.5	rpm
PIM DC Link Voltage - A	345	Volts
Motor A - Inverter Current - phase C	0	AMP
HV Battery Sleep Time	0	Days
Electric Motor B Speed	0.0	rpm
HV Battery Voltage from BPCM	343.60	Volts
Motor A Resolver Angle	Invalid Value	Degree
Outside Air Temperature	31.1	°F
PIM DC Link Voltage - B	342	Volts
Commanded Torque - Motor A	0.000	Ft-Lbs
Battery Feed Voltage 3 Sense	12.744	Volts
Inverter A IGBT Temperature for phase A	30	°F
Battery Feed Voltage 2 Sense	12.888	Volts
Battery Feed Voltage 1 Sense	12.744	Volts
Inverter B IGBT Temperature for phase A	30	°F
Inverter A IGBT Temperature for phase C	30	°F
Distance Travelled with Light ON	0	miles
GPS Date - Year	0	Year
UTC Time - Hours	0	Hours
Inverter A IGBT Temperature for phase B	30	°F
ECU Time - Milliseconds	0	ms
Inverter B IGBT Temperature for phase B	30	°F
UTC Time - Seconds	0	seconds
GPS Date - Month	1	
Inverter B IGBT Temperature for phase C	28	°F
UTC Time - Minutes	0	
GPS Date - Day	1	Days

HCP | P06B1-00 | Stored | Sensor Power Supply 1 Circuit Low-

NAME	VALUE	UNITS
DTC	06 B1 00	
Test Failed	False	
Test Failed This Operation Cycle	False	
Test Failed Since Last Clear	True	
Confirmed DTC	True	
Pending DTC	True	
Warning Indicator Requested	True	
Test Not Completed Since Last Clear	False	
Test Not Completed This Operation Cycle	False	
Occurrence flag	Occurrence	
PHEV Charging Status	No Charging	
Brake Switch Status	Not Applied	
Ignition State	Reserved	

PRND Position Display	P	
Propulsion System Active	False	
Motor A Resolver Offset Learn Erase	not requested	
Motor B Resolver Offset Learning Status Flag	Applied	
Motor A Resolver Offset Learning Status Flag	Applied	
Motor A Resolver to Digital Low Level Driver Faults	Resolver Loss of Signal	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
Hybrid System State	Reserved	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	Off	
EPT LOC Diag Enable	Enable LOC Diagnostic	
HV Contactor Status	Closed	
APM Status	Off	
HCP System Shutdown Command	Default	
Impact Event	False	
J1772 Prox Detected State	Prox Out	
OBCM Operating Mode	UTC	
Motor B Resolver Offset Learn Erase	not requested	
Original Odometer Value	903.0	miles
Frequency Counter	5	
Ignition Cycle Counter	0	
Real time clock	13041208	sec
Most Recent Odometer Value	904.2	miles
RAM Stamps	22183	Min
RAM stamps keyOn	15	sec
Engine Speed	1731	rpm
Accelerator Pedal Position	0	%
HV Battery SOC	24	%
Vehicle Speed	0.0000	MPH
Motor A Temp Sensor	30	°F
Engine Coolant Temperature	32	°F
Barometric Pressure	14	PSI
Motor B Temp Sensor	28	°F
Motor A Resolver Angle Offset	1.60	Degree
Motor A Resolver Supply Voltage Value	03FD	Volts
Battery Feed Voltage 2 Sense	14.688	Volts
Internal EPS Voltage Sense A	8.208	Volts
Motor B Resolver Supply Voltage Value	15.75	Volts
Actual Torque - Motor A	0.000	Ft-Lbs
Motor B Resolver Angle Offset	3.60	Degree
Actual Torque - Motor B	-24.152	Ft-Lbs
Internal EPS Voltage Sense B	8.064	Volts
Available Motor Torque - Motor B	232.393	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs

Available Regen Torque - Motor B	-232.393	Ft-Lbs
Available Regen Torque - Motor A	0.000	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Commanded Torque - Motor B	-19.082	Ft-Lbs
Electric Motor A Speed	6750.5	rpm
Electric Motor B Speed	1.5	rpm
Battery Feed Voltage 1 Sense	14.616	Volts
Battery Feed Voltage 3 Sense	14.544	Volts
Motor A - Inverter Current - phase C	-64	AMP
Motor A - Inverter Current - phase B	144	AMP
Motor B - Inverter Current - phase C	16	AMP
Motor A - Inverter Current - phase A	-84	AMP
Motor B - Inverter Current - phase A	16	AMP
PIM DC Link Voltage - A	338	Volts
Outside Air Temperature	32.0	°F
Motor B - Inverter Current - phase B	-44	AMP
HV Battery Voltage from BPCM	335.80	Volts
Inverter A IGBT Temperature for phase C	39	°F
Inverter A IGBT Temperature for phase A	41	°F
PIM DC Link Voltage - B	334	Volts
Inverter B IGBT Temperature for phase C	43	°F
Inverter B IGBT Temperature for phase A	41	°F
Inverter A IGBT Temperature for phase B	39	°F
Inverter B IGBT Temperature for phase B	41	°F
Distance Travelled with Light ON	0	miles
Motor B Torque	-24.152	Ft-Lbs
Motor A Torque	0.000	Ft-Lbs
HV Battery Sleep Time	0	Days
GPS Date - Year	0	Year
GPS Date - Month	1	
GPS Date - Day	1	Days
ECU Time - Milliseconds	0	ms
UTC Time - Seconds	0	seconds
UTC Time - Hours	0	Hours
UTC Time - Minutes	0	

HCP | POA3F-00 | Stored | Drive Motor A Position Sensor 1 Circuit-

NAME	VALUE	UNITS
DTC	0A 3F 00	
Test Failed	False	
Confirmed DTC	True	
Pending DTC	True	
Test Failed Since Last Clear	True	
Test Failed This Operation Cycle	False	

Test Not Completed This Operation Cycle	False	
Test Not Completed Since Last Clear	False	
Occurrence flag	Occurrence	
Warning Indicator Requested	True	
Brake Switch Status	Not Applied	
PHEV Charging Status	No Charging	
Ignition State	Reserved	
PRND Position Display	P	
Propulsion System Active	False	
Motor A Resolver Offset Learn Erase	not requested	
Motor B Resolver Offset Learning Status Flag	Applied	
Motor A Resolver Offset Learning Status Flag	Applied	
Motor A Resolver to Digital Low Level Driver Faults	Resolver Loss of Signal	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
Hybrid System State	Reserved	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	Off	
EPT LOC Diag Enable	Enable LOC Diagnostic	
HV Contactor Status	Closed	
APM Status	Buck CV	
Impact Event	False	
HCP System Shutdown Command	Default	
J1772 Prox Detected State	Prox Out	
OBCM Operating Mode	UTC	
Motor B Resolver Offset Learn Erase	not requested	
Original Odometer Value	902.8	miles
Frequency Counter	5	
Ignition Cycle Counter	0	
RAM stamps keyOn	15	sec
Most Recent Odometer Value	904.2	miles
RAM Stamps	22183	Min
Real time clock	13041208	sec
HV Battery SOC	24	%
Accelerator Pedal Position	0	%
Engine Speed	1667	rpm
Motor B Temp Sensor	28	°F
Motor A Temp Sensor	32	°F
Barometric Pressure	14	PSI
Vehicle Speed	0.0000	MPH
Engine Coolant Temperature	32	°F
Motor A Resolver Angle Offset	1.60	Degree
Motor B Resolver Angle Offset	3.60	Degree
Motor B Resolver Supply Voltage Value	15.75	Volts
Motor A Resolver Supply Voltage Value	15.75	Volts

Battery Feed Voltage 2 Sense	14.760	Volts
Actual Torque - Motor A	0.000	Ft-Lbs
Internal EPS Voltage Sense B	8.064	Volts
Internal EPS Voltage Sense A	8.208	Volts
Actual Torque - Motor B	-30.697	Ft-Lbs
Available Motor Torque - Motor B	232.485	Ft-Lbs
Available Regen Torque - Motor B	-232.485	Ft-Lbs
Available Motor Torque - Motor A	4.333	Ft-Lbs
Commanded Torque - Motor A	-4.609	Ft-Lbs
Electric Motor A Speed	6313.5	rpm
Commanded Torque - Motor B	-28.945	Ft-Lbs
Electric Motor B Speed	2.0	rpm
Available Regen Torque - Motor A	-4.333	Ft-Lbs
Motor A - Inverter Current - phase A	144	AMP
Battery Feed Voltage 1 Sense	14.688	Volts
Battery Feed Voltage 3 Sense	14.616	Volts
Motor A - Inverter Current - phase B	-80	AMP
Motor A - Inverter Current - phase C	-68	AMP
Motor B - Inverter Current - phase C	32	AMP
Motor B - Inverter Current - phase B	-64	AMP
Outside Air Temperature	32.0	°F
Motor B - Inverter Current - phase A	28	AMP
PIM DC Link Voltage - A	338	Volts
HV Battery Voltage from BPCM	336.50	Volts
PIM DC Link Voltage - B	335	Volts
Inverter A IGBT Temperature for phase C	39	°F
Inverter A IGBT Temperature for phase B	39	°F
Inverter A IGBT Temperature for phase A	41	°F
Inverter B IGBT Temperature for phase C	43	°F
Distance Travelled with Light ON	0	miles
Inverter B IGBT Temperature for phase A	41	°F
Inverter B IGBT Temperature for phase B	39	°F
Motor B Torque	-30.697	Ft-Lbs
Motor A Torque	0.000	Ft-Lbs
HV Battery Sleep Time	0	Days
GPS Date - Year	0	Year
GPS Date - Day	1	Days
UTC Time - Hours	0	Hours
UTC Time - Minutes	0	
GPS Date - Month	1	
UTC Time - Seconds	0	seconds
ECU Time - Milliseconds	0	ms

NAME	VALUE	UNITS
DTC	0A 44 00	
Test Failed	False	
Pending DTC	True	
Test Not Completed Since Last Clear	False	
Test Failed This Operation Cycle	False	
Test Failed Since Last Clear	True	
Confirmed DTC	False	
Test Not Completed This Operation Cycle	False	
Occurrence flag		
Warning Indicator Requested	False	
Brake Switch Status		
PHEV Charging Status		
Ignition State		
PRND Position Display		
Propulsion System Active		
Motor A Resolver Offset Learn Erase		
Motor B Resolver Offset Learning Status Flag		
Motor A Resolver Offset Learning Status Flag		
Motor B Resolver to Digital Low Level Driver Faults		
Motor A Resolver to Digital Low Level Driver Faults		
Hybrid System State		
HCP ePT Wake-Up Output		
CBC Wake-Up Input		
HV Contactor Status		
EPT LOC Diag Enable		
Impact Event		
APM Status		
HCP System Shutdown Command		
OBCM Operating Mode		
J1772 Prox Detected State		
Motor B Resolver Offset Learn Erase		
Frequency Counter		
Original Odometer Value		miles
Ignition Cycle Counter		
Most Recent Odometer Value		miles
Real time clock		sec
RAM Stamps		Min
Accelerator Pedal Position		%
Engine Speed		rpm
RAM stamps keyOn		sec
HV Battery SOC		%
Vehicle Speed		MPH
Motor B Temp Sensor		°F

Barometric Pressure		PSI
Motor A Temp Sensor		°F
Motor A Resolver Angle Offset		Degree
Motor A Resolver Supply Voltage Value		Volts
Engine Coolant Temperature		°F
Battery Feed Voltage 2 Sense		Volts
Motor B Resolver Angle Offset		Degree
Internal EPS Voltage Sense B		Volts
Actual Torque - Motor A		Ft-Lbs
Motor B Resolver Supply Voltage Value		Volts
Actual Torque - Motor B		Ft-Lbs
Internal EPS Voltage Sense A		Volts
Available Motor Torque - Motor A		Ft-Lbs
Available Motor Torque - Motor B		Ft-Lbs
Available Regen Torque - Motor B		Ft-Lbs
Commanded Torque - Motor A		Ft-Lbs
Available Regen Torque - Motor A		Ft-Lbs
Electric Motor A Speed		rpm
Commanded Torque - Motor B		Ft-Lbs
Electric Motor B Speed		rpm
Motor A - Inverter Current - phase A		AMP
Battery Feed Voltage 1 Sense		Volts
Battery Feed Voltage 3 Sense		Volts
Motor A - Inverter Current - phase B		AMP
Motor B - Inverter Current - phase A		AMP
Motor B - Inverter Current - phase B		AMP
Motor B - Inverter Current - phase C		AMP
Motor A - Inverter Current - phase C		AMP
Outside Air Temperature		°F
PIM DC Link Voltage - A		Volts
PIM DC Link Voltage - B		Volts
HV Battery Voltage from BPCM		Volts
Inverter A IGBT Temperature for phase A		°F
Inverter A IGBT Temperature for phase B		°F
Inverter B IGBT Temperature for phase A		°F
Inverter A IGBT Temperature for phase C		°F
Inverter B IGBT Temperature for phase B		°F
Inverter B IGBT Temperature for phase C		°F
Motor A Torque		Ft-Lbs
Motor B Torque		Ft-Lbs
Distance Travelled with Light ON		miles
GPS Date - Year		Year
GPS Date - Month		
HV Battery Sleep Time		Days

UTC Time - Hours		Hours
GPS Date - Day		Days
UTC Time - Minutes		
ECU Time - Milliseconds		ms
UTC Time - Seconds		seconds

HCP | P0C19-00 | Stored | Drive Motor A Torque Delivered Performance-

NAME	VALUE	UNITS
Test Failed	False	
DTC	0C 19 00	
Pending DTC	True	
Test Failed Since Last Clear	True	
Test Not Completed This Operation Cycle	False	
Test Failed This Operation Cycle	False	
Warning Indicator Requested	True	
Occurrence flag	Occurrence	
Confirmed DTC	True	
Test Not Completed Since Last Clear	False	
PHEV Charging Status	No Charging	
Brake Switch Status	Not Applied	
Ignition State	Reserved	
PRND Position Display	P	
Propulsion System Active	True	
Motor A Phase U Short Fault - High-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase U Cross Conduction Fault - High-Side	False	
Motor A Phase U SPI Error Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - High-Side	False	
Motor A Phase U Thermal Warning Fault - High-Side	False	
Motor A Phase U Over Current Fault - High-Side	False	
Motor A Phase U Cross Conduction Fault - Low-Side	False	
Motor A Phase U Over Current Fault - Low-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - Low-Side	False	
Motor A Phase U Short Fault - Low-Side	False	
Motor A Phase U Hardware Error Fault - High-Side	False	
Motor A Phase V Cross Conduction Fault - High-Side	False	
Motor A Phase V Over Current Fault - High-Side	False	
Motor A Phase U SPI Error Fault - Low-Side	False	
Motor A Phase U Thermal Warning Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase V Thermal Warning Fault - High-Side	False	
Motor A Phase V Short Fault - High-Side	False	

Motor A Phase U Hardware Error Fault - Low-Side	False	
Motor A Phase V SPI Error Fault - High-Side	False	
Motor A Phase V Hardware Error Fault - High-Side	False	
Motor A Phase V Short Fault - Low-Side	False	
Motor A Phase V Over Current Fault - Low-Side	False	
Motor A Phase V Cross Conduction Fault - Low-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase W Short Fault - High-Side	False	
Motor A Phase V Thermal Warning Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - High-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase W Thermal Warning Fault - High-Side	False	
Motor A Phase W Over Current Fault - High-Side	False	
Motor A Phase V SPI Error Fault - Low-Side	False	
Motor A Phase V Hardware Error Fault - Low-Side	False	
Motor A Phase W Hardware Error Fault - High-Side	False	
Motor A Phase W Short Fault - Low-Side	False	
Motor A Phase W Cross Conduction Fault - Low-Side	False	
Motor A Phase W Over Current Fault - Low-Side	False	
Motor A Phase W Thermal Warning Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - Low-Side	False	
Motor A Phase W SPI Error Fault - High-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W SPI Error Fault - Low-Side	False	
Motor A Phase W Hardware Error Fault - Low-Side	False	
Hybrid System State	Determine Hybrid System State	
HV Contactor Status	Closed	
Inverter B Status Feedback	Normal On	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	Off	
APM Status	Buck CV	
Impact Event	False	
EPT LOC Diag Enable	Enable LOC Diagnostic	
HCP System Shutdown Command	Default	
J1772 Prox Detected State	Prox Out	
OBCM Operating Mode	UTC	
Motor A Phase U Over Voltage Fault VH - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - High-Side	False	
Motor A Phase U Under Voltage Fault VL - High-Side	False	
Inverter Status Feedback	Inverter Faulted	
Motor A Phase U Over Voltage Fault VL - High-Side	False	
Commanded Inverter A State	Torque Control	
Motor A Phase U Over Voltage Fault VH - Low-Side	False	

Motor A Phase U Under Voltage Fault VDD - High-Side	False	
Motor A Phase U Under Voltage Fault VL - Low-Side	False	
Motor A Phase U Under Voltage Fault VH - High-Side	False	
Motor A Phase V Over Voltage Fault VH - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - Low-Side	False	
Motor A Phase U Under Voltage Fault VDD - Low-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase U Under Voltage Fault VH - Low-Side	False	
Motor A Phase U Over Voltage Fault VL - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - High-Side	False	
Motor A Phase V Under Voltage Fault VL - High-Side	False	
Motor A Phase V Under Voltage Fault VH - High-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Over Voltage Fault VDD - High-SideSide	False	
Motor A Phase V Under Voltage Fault VDD - High-Side	False	
Motor A Phase V Over Voltage Fault VDD - Low-Side	False	
Motor A Phase V Over Voltage Fault VH - Low-Side	False	
Motor A Phase V Under Voltage Fault VH - Low-Side	False	
Motor A Phase W Cross Conduction Fault - High-Side	False	
Motor A Phase V Under Voltage Fault VDD - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - Low-Side	False	
Motor A Phase V Under Voltage Fault VL - Low-Side	False	
Motor A Phase W Under Voltage Fault VH - High-Side	False	
Motor A Phase W Over Voltage Fault VH - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Over Voltage Fault VDD - High-Side	False	
Motor A Phase W Under Voltage Fault VL - High-Side	False	
Motor A Phase W Under Voltage Fault VH - Low-Side	False	
Motor A Phase W Over Voltage Fault VL - Low-Side	False	
Motor A Phase W Over Voltage Fault VL - High-Side	False	
Motor A Phase W Under Voltage Fault VDD - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Under Voltage Fault VL - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase W Under Voltage Fault VDD - High-Side	False	
Motor A Phase W Over Voltage Fault VH - Low-Side	False	
Inverter A Status Feedback	Inverter Faulted	
Motor A Phase W Over Voltage Fault VDD - Low-Side	False	
Original Odometer Value	902.8	miles
RAM Stamps	22183	Min
Real time clock	13041208	sec
Engine Speed	1468	rpm
Frequency Counter	5	

Most Recent Odometer Value	904.2	miles
Engine Coolant Temperature	32	°F
Actual Torque - Motor A	0.000	Ft-Lbs
Accelerator Pedal Position	0	%
Ignition Cycle Counter	0	
RAM stamps keyOn	15	sec
Barometric Pressure	14	PSI
Vehicle Speed	0.0000	MPH
Available Motor Torque - Motor A	5.254	Ft-Lbs
HV Battery SOC	24	%
Motor A - Inverter Current - phase B	108	AMP
Motor A - Inverter Current - phase A	28	AMP
Battery Feed Voltage 3 Sense	14.616	Volts
Motor A - Inverter Current - phase C	-144	AMP
Electric Motor A Speed	6255.5	rpm
Inverter A Input DC Current	0.0	AMP
Internal EPS Voltage Sense B	8.064	Volts
Battery Feed Voltage 2 Sense	14.760	Volts
Internal EPS Voltage Sense A	8.208	Volts
Motor A Resolver Supply Voltage Value	15.75	Volts
PIM DC Link Voltage - B	335	Volts
Low Temp Active Pump Speed	0	rpm
Outside Air Temperature	32.0	°F
Passive Pump Coolant Temp In Sensor	28	°F
PIM DC Link Voltage - A	338	Volts
High Temp Aux Pump - Actual Speed	3000	rpm
Battery Feed Voltage 1 Sense	14.688	Volts
Available Regen Torque - Motor B	-232.485	Ft-Lbs
Motor B Resolver Angle	46	Degree
Actual Torque - Motor B	-31.895	Ft-Lbs
Available Regen Torque - Motor A	-5.254	Ft-Lbs
Commanded Torque - Motor A	-5.439	Ft-Lbs
HV Battery Voltage from BPCM	336.70	Volts
Available Motor Torque - Motor B	232.485	Ft-Lbs
Commanded Torque - Motor B	-29.959	Ft-Lbs
Motor B - Inverter Current - phase A	24	AMP
Electric Motor B Speed	1.5	rpm
Motor B Temp Sensor	28	°F
Motor B - Inverter Current - phase C	36	AMP
Inverter A IGBT Temperature for phase C	39	°F
Inverter B IGBT Temperature for phase C	43	°F
Inverter B IGBT Temperature for phase A	41	°F
Inverter A IGBT Temperature for phase B	39	°F
Motor A Torque	0.000	Ft-Lbs

Motor B Torque	-31.895	Ft-Lbs
Inverter B IGBT Temperature for phase B	39	°F
Motor B - Inverter Current - phase B	-68	AMP
Distance Travelled with Light ON	0	miles
GPS Date - Year	0	Year
GPS Date - Month	1	
UTC Time - Hours	0	Hours
HV Battery Sleep Time	0	Days
Inverter A IGBT Temperature for phase A	41	°F
UTC Time - Seconds	0	seconds
UTC Time - Minutes	0	
ECU Time - Milliseconds	0	ms
GPS Date - Day	1	Days

ABSO | C2222-00 | Stored | Improper Powerdown-

NAME	VALUE	UNITS
Test Failed	False	
Test Failed This Operation Cycle	False	
Pending DTC	False	
Confirmed DTC	True	
DTC	62 22 00	
Test Not Completed Since Last Clear	False	
Test Failed Since Last Clear	False	
Test Not Completed This Operation Cycle	False	
Occurrence flag	Error	
Controller Event	No	
Mirror Memory	No	
Undervoltage Suspected	No	
Warning Indicator Requested	False	
Current System Mode	CAN active	
Brake Pedal Status	Released	
System Condition	ABS fault	
Rotation Direction Left Rear	Forward	
Previous System Mode	CAN active	
Rotation Direction Left Front	Forward	
Rotation Direction Right Front	Forward	
Rotation Direction Right Rear	Forward	
MSR control	Not Active	
EBV control	Not Active	
ASR control	Not Active	
ABS control	Not Active	
HBA control	Not Active	
Plant Mode	No	
ESP Control	Not Active	

BLS High	No	
Hold	No	
HSA control	Not Active	
Braking assistance system	No assistance system is braking	
BLS Low	Yes	
EPB Mode Status	Limp Home	
Stop Coordinator Active	No	
Park Brake	Not Activated	
Status Parking Brake Right	Brake is in an Unknown State	
Status Parking Brake Left	Brake is in an Unknown State	
Actual Gear	N	
ESP-OFF mode	No	
Clutch	Not Activated	
Transmission selector lever setting	P	
EPB Switch Status	Idle	
Frequency Counter	1	
Fault Time	0.00	S
Ignition Cycle Counter	0	
Supply Voltage Valves	11.6	V
Wheel Speed Left Front	0.000	MPH
Supply voltage Pump	10.0	V
Original Odometer Value	Odometer value not available / Default	miles
Most Recent Odometer Value	895	miles
Ignition Unfiltered	0.0	V
Wheel Speed Right Rear	0.000	MPH
Wheel Speed Right Front	0.000	MPH
Wheel Speed Left Rear	0.000	MPH
Primary Circuit Pressure	0.00	PSI
Brake Pedal Travel Sensor Position	0	%
Accelerator Pedal Position	0.0	%
Yaw Rate	0.000	°/s
Longitudinal Acceleration	0.00	m/s^2
Lateral Acceleration	0.00	m/s^2
Supplier Internal Code	140	
Engine Speed	0.0	rpm
Steering Wheel Angle	-121.60	°

SNAPSHOT DATA SUMMARY

No Snapshot Data available for B2199-16

No Snapshot Data available for P1C8C-16

No Snapshot Data available for P1C8B-16

No Snapshot Data available for U0594-00

No Snapshot Data available for B2199-16

No Snapshot Data available for B21DD-84

No Snapshot Data available for B143B-12

No Snapshot Data available for B143C-12

No Snapshot Data available for B143E-12

No Snapshot Data available for B143F-12

No Snapshot Data available for B2199-16

No Snapshot Data available for B2199-16

No Snapshot Data available for B21DD-16

No Snapshot Data available for B2199-16

No Snapshot Data available for B1612-00

No Snapshot Data available for B280B-00

No Snapshot Data available for P1444-00


No Snapshot Data available for P06B1-00

No Snapshot Data available for P0A3F-00

No Snapshot Data available for P0A44-00

No Snapshot Data available for P0C19-00

No Snapshot Data available for C2222-00

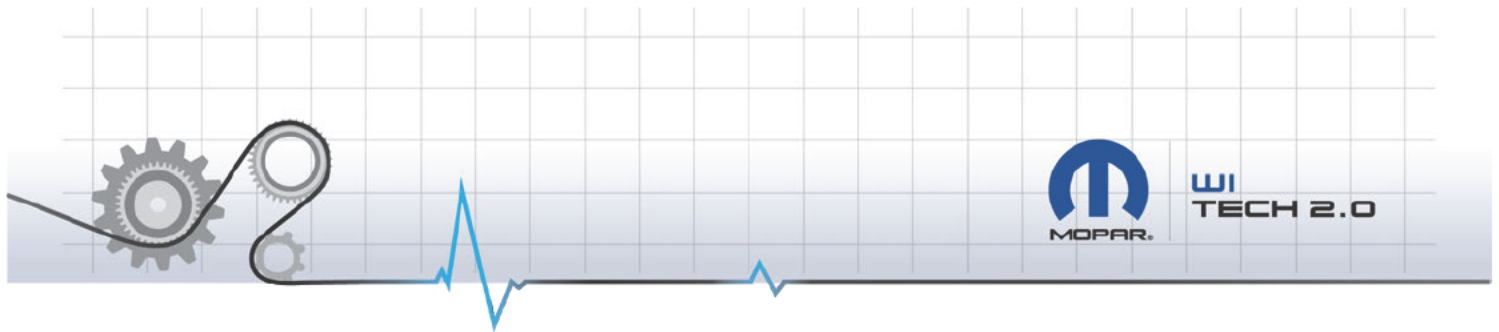

VEHICLE SCAN REPORT

Vehicle 2020 CHRYSLER PACIFICA (PHEV) 3.6L V6 HYBRID ENGINE
VIN 2C4RC1L7 [REDACTED]

Odometer 904.9 miles
Publication Date Feb 18, 2021, 11:24:03 AM

ECU SUMMARY INFO

ECU	NAME	BUS TYPE	FLASH PART #	CURRENT	ORIGINAL	PART #
PCM	Powertrain Control Module	CAN-C	68444229AE	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68444229AE
ICS	Integrated Center Stack	CAN-I	6UX601X8AA	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	6UX601X8AA
RFH	Radio Frequency Hub	CAN-C	68453559AB	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68453559AB
ESM	Electronic Shifter	CAN-C	68240089AM	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68240089AM
ORC	Occupant Restraint	CAN-C	68453076AD	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68453076AD
EPS	Electric Power Steering	CAN-C	68460392AA	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68460392AA
ANC	Active Noise Cancellation	CAN-I	68440556AB	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68440556AB
HVAC	Heat, Ventilation and A/C	CAN-I	68447893AC	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68447893AC
DDM	Driver Door Module	CAN-I	68424451AC	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68424451AC
PDM	Passenger Door Module	CAN-I	68424450AC	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68424450AC
DMRL	Door Module Rear Left	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68225096AG
DMRR	Door Module Rear Right	CAN-I	68225096AG	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68225096AG
PSDML	Power Sliding Doors (Left)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68369596AD
PSDMR	Power Sliding Doors (Right)	CAN-I	68369596AD	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68369596AD
PLGM	Power Liftgate	CAN-I	68316094AF	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68316094AF
CSWM	Comfort Seat Wheel Module	CAN-I	68434910AC	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68434910AC
IPC	Instrument Panel Cluster	CAN-C	68434956AD	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68434956AD
PTS	Parktronics	CAN-C	68193772AJ	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68193772AJ
SCCM	Steering Column Control Module	CAN-C	68360889AD	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68360889AD
BCM	Body Controller	CAN-C	68424601AF	2C4RC1L7 [REDACTED]	2C4RC1L [REDACTED]	68424601AF
RADIO	Radio	CAN-I	68461774AD	2C4RC1 [REDACTED]	2C4RC1L [REDACTED]	68461774AD

OCM	Occupant Classification	CAN-C	68403127AA	2C4RC1L7	2C4RC1L7	68403127AA
HVACR	Heat, Ventilation and A/C Rear	CAN-I	68373079AB	2C4RC1L7	2C4RC1L7	68373079AB
LBSS	Left Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7	2C4RC1L7	04672786AB
RBSS	Right Blind Spot Sensor	CAN-I	04672786AB	2C4RC1L7	2C4RC1L7	04672786AB
APM	Accessory Power Module	CAN-C	05185046AB	2C4RC1L7	2C4RC1L7	05185046AB
BPCM	Battery Pack Control Module	CAN-C	05193166AD	2C4RC1L7	2C4RC1L7	05193166AD
HCP	Hybrid Control Processor	CAN-C	05190289AC	2C4RC1L7	2C4RC1L7	05190289AC
OBCM	On Board Charging Module	CAN-C	05185047AE	2C4RC1L7	2C4RC1L7	05185047AE
DSM	Display Screen Module	CAN-I	68316175AC	2C4RC1L7	2C4RC1L7	68316175AC
RCCC	Rear Cabin Comfort Controls	CAN-I	6WL30DX9AA	2C4RC1L7	2C4RC1L7	6WL30DX9AA
EAC	Electric A/C Compressor	CAN-C	68237995AG	2C4RC1L7	2C4RC1L7	68237995AG
AHCP	Auxiliary Hybrid Control Processor	CAN-C	05190290AC	2C4RC1L7	2C4RC1L7	05190290AC
EBBM	Electronic Brake Booster Module	CAN-C	68461813AB	2C4RC1L7	2C4RC1L7	68461813AB
ABSO	Anti Lock Brakes OBD	CAN-C	68471122AD	2C4RC1L7	2C4RC1L7	68471122AD
SGW	Security Gateway Module	CAN-C	68447193AB		2C4RC1L7	68447193AB

ECU SUMMARY INFO (CONT...)

ECU	COUNTRY CODE	HARDWARE VERSION	SOFTWARE VERSION	IDENT	CVNS
PCM	USA	1B 47	46 03 01	4419	DFF8E724
ICS	USA	0F 0C 00	12 25 00	4400	
RFH	USA / USA	10 17 00	13 09 00	4A00	
ESM	USA / USA	0F 24 00	12 28 FF	4402	
ORC	USA / USA	12 1A 00	13 2E 00	4301	
EPS	USA / USA	12 2A 00	12 1E 01	4502	
ANC	USA	0F 05 01	12 2C 01	4210	
HVAC	USA	0E 09 00	13 05 01	4401	
DDM	USA	11 07 00	13 0B 00	4202	
PDM	USA	11 07 00	13 0B 00	4202	
DMRL	USA / USA	10 0B 00	12 0C 00	4201	
DMRR	USA / USA	10 0B 00	12 0C 00	4201	
PSDML	USA / USA	10 17 00	14 10 12	4001	
PSDMR	USA / USA	10 17 00	14 10 12	4001	
PLGM	USA	17 19 00	18 22 00	4202	
CSWM	USA	11 2A 00	13 2C 00	4302	
IPC	USA / USA	12 06 00	14 0B 00	4704	

PTS	USA	0E 32 00	12 1F 00	4311	
SCCM	USA	13 28 00	13 29 00	4301	
BCM	USA	0D 11 00	14 1B 90	4415	
RADIO	USA	13 31 14	13 31 14	8205	
OCM	USA / USA	11 1F 01	0E 2F 02	4030	
HVACR	USA	0E 09 00	10 03 02	4301	
LBSS	USA / USA	11 30 02	12 0D 00	4202	
RBSS	USA / USA	11 30 02	12 0D 00	4202	
APM	USA / USA	11 32 00	11 32 00	4001	
BPCM	Not programmed / COUNTRY_SNA	0E 03 00	13 18 03	4005	F5BC8401
HCP	USA	11 1F 04	13 30 01	4005	92BCF62B 04D8393A 050DC953
OBCM	USA	0F 0D 00	12 02 00	4002	
DSM	USA / USA	13 29 00	12 23 00	4000	
RCCC	USA	0F 1D 00	13 04 00	4000	
EAC	USA	0E 34 00	12 0F 00	4102	
AHCP	USA	11 1F 04	13 30 01	4000	
EBBM	USA	0E 19 02	14 0D 18	4000	E5898FA5
ABSO	USA	0E 15 02	14 1B 26	4201	4F158D1B
SGW		5	779	4103	

DTC SUMMARY

ECU	DTC CODE	DTC DESCRIPTION	STATUS
HCP	P0A3F-00	Drive Motor A Position Sensor 1 Circuit-	Stored
HCP	P0C19-00	Drive Motor A Torque Delivered Performance-	Stored

ENVIRONMENTAL DATA SUMMARY

[HCP](#) | [P0A3F-00](#) | [Stored](#) | [Drive Motor A Position Sensor 1 Circuit-](#)

NAME	VALUE	UNITS
DTC	0A 3F 00	
Pending DTC	True	
Test Failed	False	
Test Not Completed Since Last Clear	False	
Occurrence flag	Occurrence	
Test Failed This Operation Cycle	False	
Test Failed Since Last Clear	True	
Confirmed DTC	True	
PHEV Charging Status	No Charging	
Warning Indicator Requested	True	
Test Not Completed This Operation Cycle	False	
Brake Switch Status	Applied	
Ignition State	Reserved	
Motor A Resolver Offset Learn Erase	not requested	

Motor B Resolver Offset Learning Status Flag	Applied	
Motor B Resolver to Digital Low Level Driver Faults	No fault	
PRND Position Display	N	
Propulsion System Active	False	
Motor A Resolver to Digital Low Level Driver Faults	No fault	
Motor A Resolver Offset Learning Status Flag	Applied	
Hybrid System State	Reserved	
HCP ePT Wake-Up Output	On	
CBC Wake-Up Input	Off	
EPT LOC Diag Enable	Enable LOC Diagnostic	
HV Contactor Status	Closed	
APM Status	Off	
Impact Event	False	
HCP System Shutdown Command	Default	
OBCM Operating Mode	UTC	
J1772 Prox Detected State	Prox Out	
Motor B Resolver Offset Learn Erase	not requested	
Accelerator Pedal Position	0	%
RAM stamps keyOn	1140	sec
Real time clock	13294248	sec
Frequency Counter	1	
RAM Stamps	35	Min
Ignition Cycle Counter	0	
Engine Speed	1823	rpm
Most Recent Odometer Value	904.9	miles
Vehicle Speed	3.4904	MPH
HV Battery SOC	58	%
Original Odometer Value	904.9	miles
Engine Coolant Temperature	169	°F
Barometric Pressure	14	PSI
Motor A Resolver Angle Offset	2.00	Degree
Battery Feed Voltage 2 Sense	14.184	Volts
Motor B Resolver Supply Voltage Value	15.75	Volts
Motor B Resolver Angle Offset	3.60	Degree
Motor A Resolver Supply Voltage Value	15.75	Volts
Actual Torque - Motor B	-0.184	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor B	235.988	Ft-Lbs
Actual Torque - Motor A	0.000	Ft-Lbs
Internal EPS Voltage Sense B	8.136	Volts
Available Regen Torque - Motor B	-235.988	Ft-Lbs
Commanded Torque - Motor A	0.000	Ft-Lbs
Motor A Temp Sensor	91	°F
Commanded Torque - Motor B	1.014	Ft-Lbs

Available Regen Torque - Motor A	0.000	Ft-Lbs
Electric Motor A Speed	7825.0	rpm
Motor B Temp Sensor	97	°F
Internal EPS Voltage Sense A	8.208	Volts
Electric Motor B Speed	-405.0	rpm
Battery Feed Voltage 3 Sense	14.040	Volts
Motor A - Inverter Current - phase A	-64	AMP
Motor B - Inverter Current - phase A	0	AMP
Motor B - Inverter Current - phase C	0	AMP
Motor B - Inverter Current - phase B	4	AMP
Battery Feed Voltage 1 Sense	14.112	Volts
Inverter A IGBT Temperature for phase C	91	°F
Motor A - Inverter Current - phase B	140	AMP
Inverter A IGBT Temperature for phase A	93	°F
PIM DC Link Voltage - A	359	Volts
Inverter A IGBT Temperature for phase B	91	°F
HV Battery Voltage from BPCM	357.40	Volts
Motor B Torque	-0.184	Ft-Lbs
Outside Air Temperature	41.0	°F
Inverter B IGBT Temperature for phase B	91	°F
Inverter B IGBT Temperature for phase C	91	°F
PIM DC Link Voltage - B	356	Volts
GPS Date - Month	1	
Motor A - Inverter Current - phase C	-84	AMP
UTC Time - Hours	0	Hours
Motor A Torque	0.000	Ft-Lbs
Distance Travelled with Light ON	0	miles
UTC Time - Seconds	0	seconds
GPS Date - Day	1	Days
GPS Date - Year	0	Year
HV Battery Sleep Time	0	Days
UTC Time - Minutes	0	
ECU Time - Milliseconds	0	ms
Inverter B IGBT Temperature for phase A	91	°F

HCP | P0C19-00 | Stored | Drive Motor A Torque Delivered Performance-

NAME	VALUE	UNITS
DTC	0C 19 00	
Test Failed This Operation Cycle	False	
Test Failed	False	
Test Failed Since Last Clear	True	
Test Not Completed Since Last Clear	False	
Confirmed DTC	True	
Test Not Completed This Operation Cycle	False	

Warning Indicator Requested	True	
Occurrence flag	Occurrence	
Pending DTC	True	
PHEV Charging Status	No Charging	
PRND Position Display	N	
Ignition State	Reserved	
Propulsion System Active	False	
Brake Switch Status	Applied	
Motor A Phase U Cross Conduction Fault - High-Side	False	
Motor A Phase U Short Fault - High-Side	False	
Motor A Phase U Over Current Fault - High-Side	False	
Motor A Phase U Thermal Shutdown Fault - High-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase U Thermal Warning Fault - High-Side	False	
Motor A Phase U Short Fault - Low-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase U Cross Conduction Fault - Low-Side	False	
Motor A Phase U SPI Error Fault - High-Side	False	
Motor A Phase U Over Current Fault - Low-Side	False	
Motor A Phase U Hardware Error Fault - High-Side	False	
Motor A Phase U Thermal Warning Fault - Low-Side	False	
Motor A Phase U Thermal Shutdown Fault - Low-Side	False	
Motor A Phase U SPI Error Fault - Low-Side	False	
Motor A Phase U Hardware Error Fault - Low-Side	False	
Motor A Phase V Short Fault - High-Side	False	
Motor A Phase V Cross Conduction Fault - High-Side	False	
Motor A Phase V Over Current Fault - High-Side	False	
Motor A Phase V Thermal Warning Fault - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase V Thermal Shutdown Fault - High-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase V SPI Error Fault - High-Side	False	
Motor A Phase V Hardware Error Fault - High-Side	False	
Motor A Phase V Short Fault - Low-Side	False	
Motor A Phase V Cross Conduction Fault - Low-Side	False	
Motor A Phase V Over Current Fault - Low-Side	False	
Motor A Phase V Thermal Warning Fault - Low-Side	False	
Motor A Phase V Thermal Shutdown Fault - Low-Side	False	
Motor A Phase V SPI Error Fault - Low-Side	False	
Motor A Phase V Hardware Error Fault - Low-Side	False	
Motor A Phase W Over Current Fault - High-Side	False	
Motor A Phase W Short Fault - High-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - High-Side	False	
Motor A Phase W SPI Error Fault - High-Side	False	

Motor A Phase W Hardware Error Fault - High-Side	False	
Motor A Phase W Thermal Warning Fault - High-Side	False	
Motor A Phase W Cross Conduction Fault - Low-Side	False	
Motor A Phase W Short Fault - Low-Side	False	
Motor A Phase W Over Current Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - High-Side	False	
Motor A Phase W Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W SPI Error Fault - Low-Side	False	
Motor A Phase W Thermal Warning Fault - Low-Side	False	
Motor A Phase W Thermal Shutdown Fault - Low-Side	False	
Motor A Phase W Hardware Error Fault - Low-Side	False	
Hybrid System State	Reserved	
Inverter B Status Feedback	Normal On	
HV Contactor Status	Closed	
HCP ePT Wake-Up Output	On	
EPT LOC Diag Enable	Enable LOC Diagnostic	
CBC Wake-Up Input	Off	
Impact Event	False	
APM Status	Off	
HCP System Shutdown Command	Default	
J1772 Prox Detected State	Prox Out	
OBCM Operating Mode	UTC	
Commanded Inverter A State	Torque Control	
Inverter Status Feedback	Inverter Faulted	
Motor A Phase U Over Voltage Fault VH - High-Side	False	
Motor A Phase U Under Voltage Fault VH - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - High-Side	False	
Motor A Phase U Under Voltage Fault VL - High-Side	False	
Motor A Phase U Under Voltage Fault VDD - High-Side	False	
Motor A Phase U Over Voltage Fault VH - Low-Side	False	
Motor A Phase U Over Voltage Fault VL - Low-Side	False	
Motor A Phase U Under Voltage Fault VH - Low-Side	False	
Motor A Phase U Over Voltage Fault VL - High-Side	False	
Motor A Phase U Under Voltage Fault VDD - Low-Side	False	
Motor A Phase U Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Under Voltage Fault VH - High-Side	False	
Motor A Phase U Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase V Over Voltage Fault VH - High-Side	False	
Motor A Phase V Under Voltage Fault VL - High-Side	False	
Motor A Phase U Over Voltage Fault VDD - Low-Side	False	
Motor A Phase U Under Voltage Fault VL - Low-Side	False	
Motor A Phase V Over Voltage Fault VDD - High-SideSide	False	
Motor A Phase V Under Voltage Fault VDD - High-Side	False	
Motor A Phase V Under Voltage Fault VH - Low-Side	False	

Motor A Phase V Under Voltage Fault VL - Low-Side	False	
Motor A Phase V Over Voltage Fault VH - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - Low-Side	False	
Motor A Phase V Over Voltage Fault VDD - Low-Side	False	
Motor A Phase V Over Voltage Fault VL - High-Side	False	
Motor A Phase W Under Voltage Fault VH - High-Side	False	
Motor A Phase V Under Voltage Fault VDD - Low-Side	False	
Motor A Phase V Comm Error Low Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Over Voltage Fault VL - High-Side	False	
Motor A Phase V Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Over Voltage Fault VDD - High-Side	False	
Motor A Phase W Under Voltage Fault VL - High-Side	False	
Motor A Phase W Over Voltage Fault VH - High-Side	False	
Motor A Phase W Cross Conduction Fault - High-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - High-Side	False	
Motor A Phase W Over Voltage Fault VL - Low-Side	False	
Motor A Phase W Under Voltage Fault VH - Low-Side	False	
Motor A Phase W Under Voltage Fault VDD - Low-Side	False	
Motor A Phase W Over Voltage Fault VDD - Low-Side	False	
Motor A Phase W Comm Error High Voltage Regulator Fault - Low-Side	False	
Motor A Phase W Over Voltage Fault VH - Low-Side	False	
Inverter A Status Feedback	Inverter Faulted	
Motor A Phase W Under Voltage Fault VDD - High-Side	False	
Motor A Phase W Under Voltage Fault VL - Low-Side	False	
Ignition Cycle Counter	0	
Frequency Counter	1	
Most Recent Odometer Value	904.9	miles
Original Odometer Value	904.9	miles
Real time clock	13294248	sec
Accelerator Pedal Position	0	%
Vehicle Speed	3.5001	MPH
HV Battery SOC	58	%
Inverter A Input DC Current	0.0	AMP
RAM Stamps	35	Min
Actual Torque - Motor A	0.000	Ft-Lbs
Available Motor Torque - Motor A	0.000	Ft-Lbs
Engine Coolant Temperature	169	°F
RAM stamps keyOn	1140	sec
Motor A - Inverter Current - phase C	128	AMP
Electric Motor A Speed	7805.0	rpm
Barometric Pressure	14	PSI
Motor A - Inverter Current - phase B	-8	AMP
Motor A - Inverter Current - phase A	-124	AMP
Battery Feed Voltage 2 Sense	14.184	Volts

Internal EPS Voltage Sense B	8.136	Volts
Passive Pump Coolant Temp In Sensor	84	°F
Low Temp Active Pump Speed	0	rpm
Outside Air Temperature	41.0	°F
Internal EPS Voltage Sense A	8.208	Volts
Commanded Torque - Motor B	0.000	Ft-Lbs
Battery Feed Voltage 1 Sense	14.112	Volts
High Temp Aux Pump - Actual Speed	5736	rpm
Engine Speed	1823	rpm
Battery Feed Voltage 3 Sense	14.040	Volts
Motor A Resolver Supply Voltage Value	15.75	Volts
Commanded Torque - Motor A	0.000	Ft-Lbs
Actual Torque - Motor B	-0.277	Ft-Lbs
Motor B - Inverter Current - phase B	-4	AMP
Available Motor Torque - Motor B	235.988	Ft-Lbs
Electric Motor B Speed	-394.0	rpm
Motor B - Inverter Current - phase A	-4	AMP
Available Regen Torque - Motor A	0.000	Ft-Lbs
PIM DC Link Voltage - B	356	Volts
Available Regen Torque - Motor B	-235.988	Ft-Lbs
PIM DC Link Voltage - A	359	Volts
Inverter A IGBT Temperature for phase C	91	°F
Inverter B IGBT Temperature for phase B	91	°F
Inverter A IGBT Temperature for phase B	91	°F
Inverter A IGBT Temperature for phase A	93	°F
Motor B Resolver Angle	200	Degree
Motor B - Inverter Current - phase C	0	AMP
Motor B Temp Sensor	97	°F
Distance Travelled with Light ON	0	miles
HV Battery Voltage from BPCM	357.30	Volts
GPS Date - Month	1	
Inverter B IGBT Temperature for phase C	91	°F
Inverter B IGBT Temperature for phase A	91	°F
Motor B Torque	-0.277	Ft-Lbs
Motor A Torque	0.000	Ft-Lbs
HV Battery Sleep Time	0	Days
GPS Date - Day	1	Days
UTC Time - Seconds	0	seconds
UTC Time - Hours	0	Hours
UTC Time - Minutes	0	
GPS Date - Year	0	Year
ECU Time - Milliseconds	0	ms

SNAPSHOT DATA SUMMARY

No Snapshot Data available for P0A3F-00

No Snapshot Data available for P0C19-00