



December 2010

Dear General Motors Customer:

This notice is sent to you in accordance with the requirements of the National Traffic and Motor Vehicle Safety Act.

General Motors has decided that certain 2004-2011 model year Chevrolet Colorado and GMC Canyon regular cab vehicles and extended cab vehicles without a rear seat, and equipped with a front 60/40 split bench seat fail to conform to Federal/Canada Motor Vehicle Safety Standard (FMVSS) 225 and (CMVSS) 210.1. The top tether anchor for the front center seat is not accessible and the Owner Manual does not include instructions regarding how to use the top tether. As a result, GM is conducting a recall. We apologize for this inconvenience. However, we are concerned about your safety and continued satisfaction with our products.

IMPORTANT

- Your vehicle is involved in Noncompliance Special Coverage 10407.
- This notice contains important information and instructions to the use of child restraints in your vehicle.
- Schedule an appointment with your GM dealer.
- This service will be performed for you at no charge.

Why is your vehicle being recalled?

The child restraint top tether anchor for the front center seat position in your vehicle is not accessible as required by the Standard. FMVSS 225 also requires that the Owner Manual includes a step-by-step procedure for attaching a child restraint top tether to a vehicle top tether anchor.

The top tether helps to secure a child seat. Even with the top tether, however, both the National Highway Traffic Safety Administration and GM discourage placement of a child in a front seat. In the event of a crash, a child in a child restraint in the front center seat position with or without a top tether anchor restraint can be seriously injured or killed.

What will we do?

FMVSS 225 requires that we provide the enclosed Owner Manual Supplement that describes how to install a child restraint using a top tether in the front center seat position; however, General Motors does not recommend that you place a child restraint in the front center seat. A child in a child restraint in the front center seat position can be seriously injured or killed by the frontal airbags if they inflate.

If you must transport a child in a forward-facing child restraint in your vehicle, General Motors recommends placing the forward-facing child restraint in the right front passenger seat where a top tether anchor is already accessible. The vehicle may have a passenger sensing system or a manual on-off switch that is designed to turn off the right front passenger frontal airbag under certain conditions. In addition, a forward-facing child restraint installed in the right front passenger seat would not interact with the driver's frontal airbag. Rear-facing child restraints should not be installed in vehicles without a rear seat, even if the passenger airbag is off. Please refer to the appropriate section in your Owner Manual for more information.

Your GM dealer will cut a hole into the back panel trim cover to allow access to the top tether anchor for the front center seat position. See the enclosed insert for an illustration. This service procedure will be performed for you at **no charge**. Because of service scheduling requirements, it is likely that your dealer will need your vehicle longer than the actual service correction time of approximately 20 minutes.

What should you do?

Please place the enclosed Owner Manual Supplement in your Owner Manual in the Seats and Restraints section for future reference.

Because a child in a child restraint in the front center seat position can be seriously injured or killed by the frontal airbags if they inflate, GM does not recommend installing child restraints in the front center seat position.

You should contact your GM dealer to arrange a service appointment to have an access hole cut into the back panel trim cover as soon as possible. Until this recall can be performed on your vehicle, a child restraint top tether cannot be attached to the top tether anchor for the front center seat position. After this procedure has been performed by your dealer, the Owner Manual Supplement provides a step-by-step procedure for attaching a child restraint top tether to the vehicle top tether anchor for the front center seat position.

Do you have questions?

If you have questions or concerns that your dealer is unable to resolve, please contact the appropriate Customer Assistance Center at the number listed below. More information about your vehicle can be found at the Owner Center at www.gmownercenter.com.

Division	Number	Text Telephones (TTY)
Chevrolet	1-800-630-2438	1-800-833-2438

GMC	1-866-996-9463	1-800-462-8583
Guam	1-671-648-8450	
Puerto Rico – English	1-800-496-9992	
Puerto Rico – Español	1-800-496-9993	
Virgin Islands	1-800-496-9994	

If after contacting your dealer and the Customer Assistance Center, you are still not satisfied we have done our best to remedy this condition without charge and within a reasonable time, you may wish to write the Administrator, National Highway Traffic Safety Administration, 1200 New Jersey Avenue, SE, Washington DC 20590, or call the toll-free Vehicle Safety Hotline at 1.888.327.4236 (TTY 1.800.424.9153), or go to <http://www.safercar.gov>.

Federal regulation requires that any vehicle lessor receiving this recall notice must forward a copy of this notice to the lessee within ten days.

Jim Moloney
General Director,
Customer and Relationship Services

Enclosure
10407

THIS INFORMATION IS IN ADDITION TO THE CHILD RESTRAINT INFORMATION CONTAINED IN YOUR OWNER MANUAL

Where to Put the Restraint

According to accident statistics, children and infants are safer when properly restrained in a child restraint system or infant restraint system secured in a rear seating position.

General Motors recommends that children and child restraints be secured in a rear seat, including: an infant or a child riding in a rear-facing child restraint; a child riding in a forward-facing child seat; an older child riding in a booster seat; and children, who are large enough, using safety belts.

Never put a rear-facing child seat in the front. This is because the risk to the rear-facing child is so great, if the airbag deploys.

Warning: A child in a rear-facing child restraint can be seriously injured or killed if the right front passenger airbag inflates. This is because the back of the rear-facing child restraint would be very close to the inflating airbag. A child in a forward-facing child restraint can be seriously injured or killed if the right front passenger airbag inflates and the passenger seat is in a forward position.

The vehicle may have a passenger sensing system or a manual airbag on-off switch which is designed to turn off the right front passenger frontal airbag under certain conditions. Even if the passenger sensing system or manual airbag on-off switch, if equipped, has turned off the right front passenger frontal airbag, no system is fail-safe. No one can guarantee that an airbag will not deploy under some unusual circumstance, even though it is turned off.

Secure rear-facing child restraints in a rear seat, even if the airbag is off. If you secure a forward-facing child restraint in the right front seat, always move the front passenger seat as far back as it will go. It is better to secure the child restraint in the back of a vehicle equipped with a rear seat.

See "Passenger Sensing System" or "Airbag On-Off Switch" in the vehicle owner manual for additional information.

Warning: A child in a child restraint in the center front seat can be badly injured or killed by the frontal airbags if they inflate. Never secure a child restraint in the center front seat. It is always better to secure a child restraint in a rear seat.

Do not use child restraints in the center front seat position.

General Motors understands that there may be certain circumstances where it is necessary to transport a child in a forward-facing child restraint in your vehicle. In these cases, we recommend placing the forward-facing child restraint in the right front passenger seat where a top tether anchor is already

accessible. The vehicle may have a passenger sensing system or a manual airbag on-off switch which is designed to turn off the right front passenger frontal airbag under certain conditions. In addition, a forward-facing child restraint installed in the right front passenger seat would not interact with the driver frontal airbag. Rear-facing child restraints should not be installed in vehicles without a rear seat, even if the airbag is off. See "Child Restraints" in the vehicle owner manual for instructions on how to install a child restraint in the right front seat position.

Securing Forward-Facing Child Restraints (Center Front Seat Position)

For vehicles without rear seats, manufacturers are required to provide top tether anchors for all non-driver seating positions and instructions for using those anchors. Even if a top tether anchor is available, you should not install a child restraint in the center front seating position.


Warning: A child in a child restraint in the center front seat can be badly injured or killed by the frontal airbags if they inflate. Never secure a child restraint in the center front seat. It is always better to secure a child restraint in a rear seat.

In addition, some larger child restraints, if installed in the center front seating position, may interfere with access to the driver and right front passenger safety belt buckles. See "Safety Belts" in the vehicle owner manual for information, including warnings, about the importance of safety belt use.

If you must transport a forward-facing child restraint in the center front seat position, you must have a hole in the back panel trim cover to allow access to the top tether anchor for that position. If your vehicle does not already have a hole, you must have a service procedure performed on your vehicle prior to securing a forward-facing child restraint in the center front seat position. Your GM dealer will cut a hole into the back panel trim cover to allow access to the top tether anchor for the front center seat position. This service procedure will be performed for you at no charge.

The lap belt would be used to secure a child restraint in this position, following the instructions that came with the child restraint.

1. Adjust the driver seat to the desired driving position. Fold the armrest up, if equipped. Move the passenger seat so that the seat and seatback are aligned with the driver seat and seatback positions. See the appropriate section in the vehicle owner manual for more information on adjusting the seat and seatback.
2. Place the child restraint on the seat.
3. If the child restraint manufacturer recommends using a top tether anchor, attach the top tether on the child restraint to the top tether anchor on the vehicle. Route the top tether according to the child restraint instructions and the following instructions:
 - 3.1. Route the top tether over the center seatback or folding armrest, if equipped.

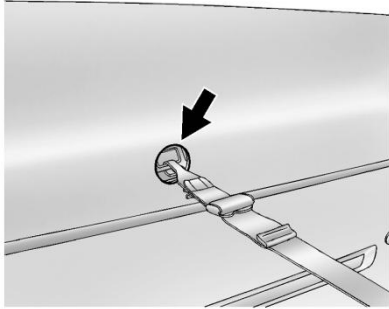

- 3.2. Attach the top tether to the slots in the back panel as shown. Do not tighten the top tether at this time.
4. Pick up the latch plate on the center position lap safety belt, and run the lap safety belt through the restraint. The child restraint instructions will show you how.
5. Push the latch plate into the buckle until it clicks. Position the release button on the buckle so that the safety belt can be unbuckled.
6. Tighten the center position lap belt by pulling on the loose end of the belt. It may be helpful to use your knee to push down on the child restraint as you tighten the belt.
7. Tighten the top tether. Follow the child restraint manufacturer's instructions.
8. Before placing a child in the child restraint, make sure it is securely held in place. To check, grasp the child restraint at the safety belt path and attempt to move it side to side and back and forth. When the child restraint is properly installed, there should be no more than 2.5 cm (1 in) of movement.