

## Reference:

ITB14-034d

## Date:

January 31, 2015

**VOLUNTARY SAFETY RECALL CAMPAIGN**  
**2003-2005 FX, 2003-2004 I35, 2006 M**  
**FRONT PASSENGER AIR BAG INFLATOR - REGIONAL**

This bulletin has been amended to change the M repair from replacement of the entire module to replacement of the inflator. Please discard previous versions of this bulletin.

CAMPAIGN ID #: P4235  
NHTSA #: 14V-701  
APPLIED VEHICLES: 2003 - 2005 FX (S50)  
2003 - 2004 I35 (CA33)  
2006 M (Y50)

Check Service Comm to confirm campaign eligibility.

## INTRODUCTION

Infiniti is conducting a campaign on certain 2006 M, 2003-2005 FX, and 2003-2004 I35 vehicles currently or previously registered in the following areas: Florida, Hawaii, U.S. Virgin Islands, Puerto Rico, Guam, Saipan, Samoa, and the coastal areas of Alabama, Louisiana, Georgia, Mississippi, and Texas. The front passenger air bag inflators will be replaced at no charge to customers for parts or labor.

Takata has issued return packaging, shipping labels, documents, and directions that must be used and followed in order to properly carry out this campaign. Takata's documentation is attached and is part of this bulletin.

## IDENTIFICATION NUMBER

Infiniti has assigned identification number P4235 to this campaign. This number must appear on all communication and documentation of any nature dealing with this campaign.

## DEALER RESPONSIBILITY

It is the dealer's responsibility to check Service Comm for the campaign status on each vehicle falling within the range of this voluntary safety recall which for any reason enters the service department. This includes vehicles purchased from private parties or presented by transient (tourist) owners and vehicles in a dealer's inventory. **Federal law requires that new vehicles in dealer inventory which are the subject of a safety recall must be corrected prior to sale. Failure to do so can result in civil penalties by the National Highway Traffic Safety Administration.** While federal law applies only to new vehicles, Infiniti strongly encourages dealers to correct any used vehicles in their inventory before they are retailed.

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Infiniti dealer to determine if this applies to your vehicle.

REQUIRED SPECIAL TOOL (J-51315-KIT)

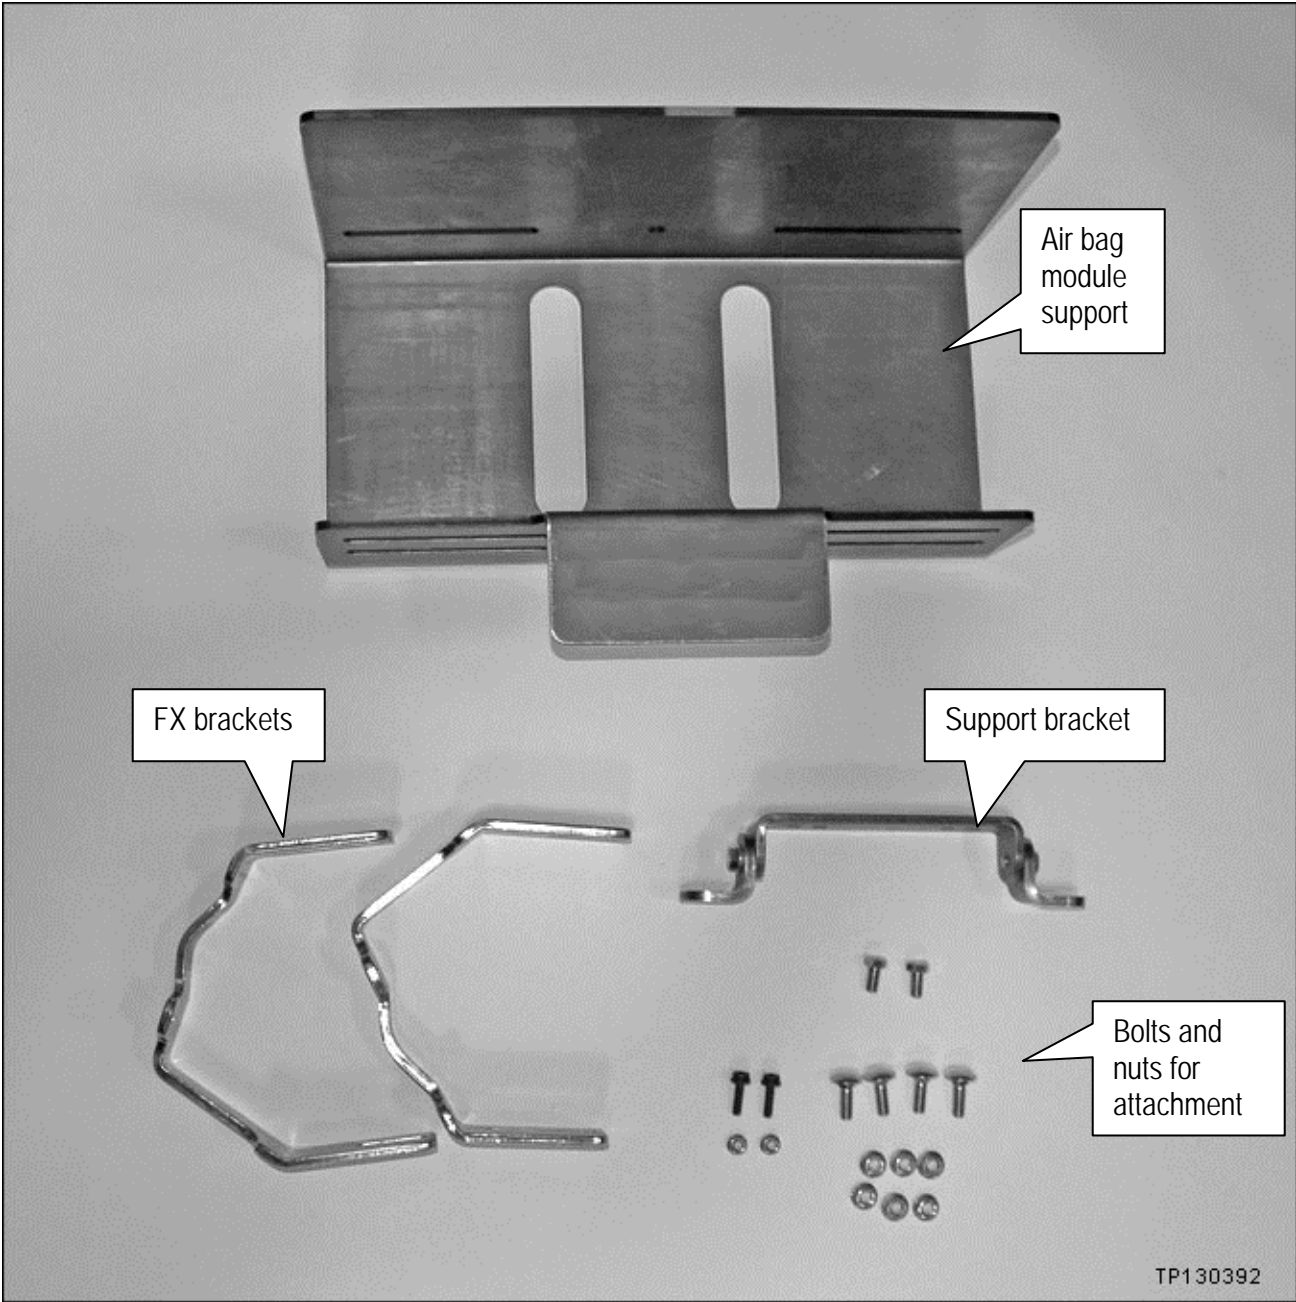


Figure A

## SERVICE PROCEDURE

**IMPORTANT:** Connection of the new harness for the M is different than the I35 or FX. Make sure to read the harness connection instructions for each vehicle.

**IMPORTANT:** Follow all cautions, warnings, and notes in the Electronic Service Manual (ESM) when working on or near a Supplemental Restraint System (SRS), such as an air bag.

**CAUTION:** Handle interior trim carefully to avoid damage. Work with clean hands and clean tools to avoid dirt and stains. Use protective covers as needed.

1. Write down the radio settings.

Presets	1	2	3	4	5	6
AM						
FM 1						
FM 2						
SAT 1						
SAT 2						
Bass	Treble		Balance		Fade	Speed Sen. Vol.

2. Turn the ignition OFF.
3. Disconnect both battery cables, negative cable first.
4. Wait at least 3 minutes.
5. Remove the passenger air bag module (module) from the vehicle.
  - Refer to the appropriate Electronic Service Manual (ESM) for module removal information.
6. Set the module in a clean working area.

**NOTE:** Do not set the module with cover facing down.

7. Securely mount the air bag module support (support) in a vice (see Figure 1).

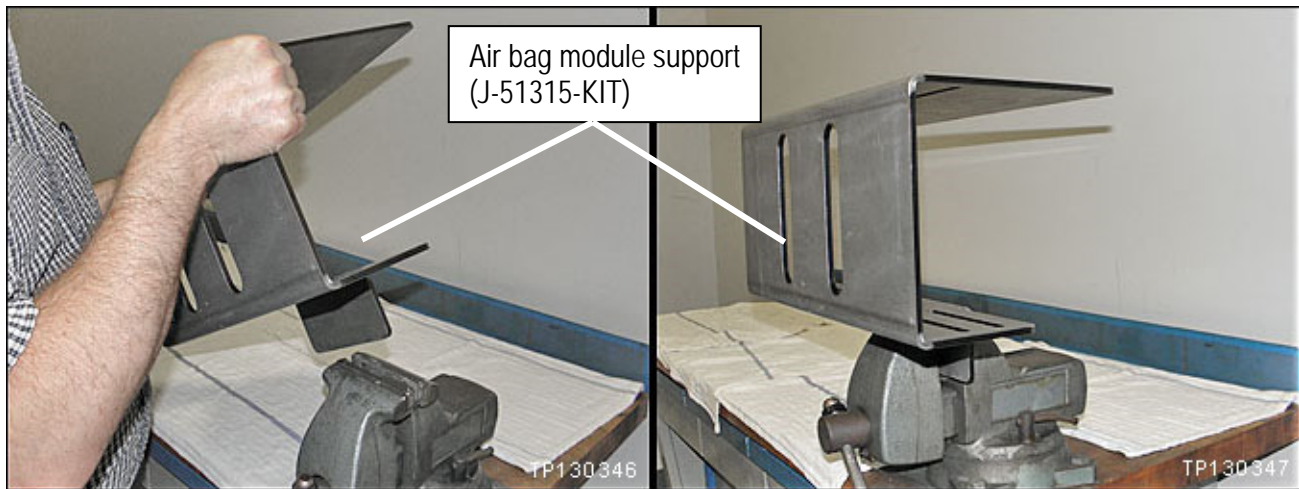


Figure 1

**WARNING:** Work from behind and to the sides of the support.

8. Replace the module Inflater:

- I35; page 5
- FX; page 15
- M; Page 24.

**IMPORTANT:** Connection of the new harness for the M is different than the I35 or FX. Make sure to read the harness connection instructions for each vehicle

9. Reinstall the module into the vehicle in reverse order of removal.

- Make sure to use the new “one time use” module mounting bolts included with the new inflator.

**NOTE:** For FX (per a Service Manual amendment – ITB13-023) only one air bag mounting bolt is “one time use”. This “one time use” bolt is included in the box with the FX inflator.

10. Re-connect both battery cables – positive cable first.

11. Reset the clock and the radio settings.

12. Turn the ignition ON and observe the air bag warning light:

- Light should illuminate for 7 seconds and then go out.

**NOTE:** If the Air Bag Warning light does not operate as described above there may be an issue not covered by this campaign. Refer to ASIST and the appropriate Service Manual for additional diagnostic and repair information.

13. Return the removed (old / non-deployed) inflator in the box that the new inflator arrived in.

- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

## 135 Inflator replacement

**WARNING:** Wear safety glasses while performing inflator replacement.

1. Set the module on a clean working area.
2. Disconnect the harness clip from the module frame.

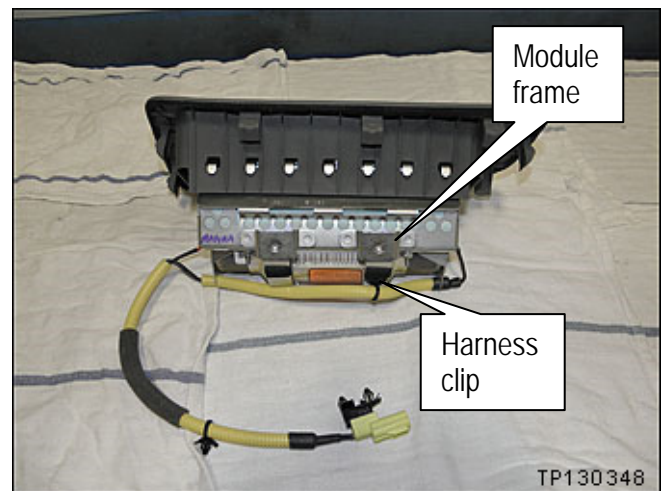


Figure M1

3. Attach the module support bracket to the module frame.
  - Tighten the bolts holding the bracket to the module frame.
  - Leave the L brackets on each end slightly loose to allow for positioning of the module in the support.

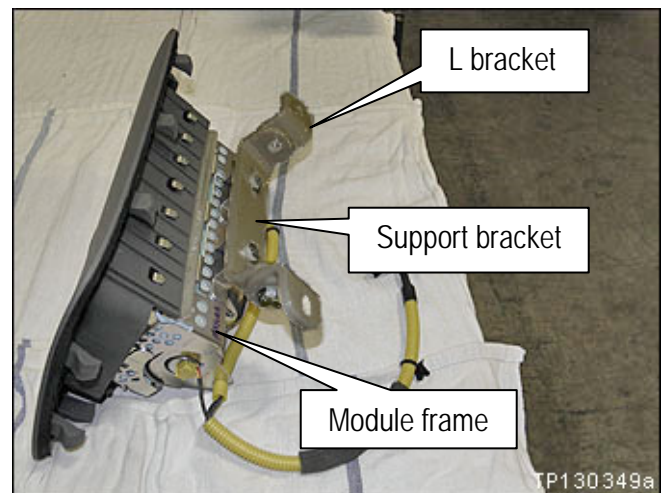


Figure M2

**WARNING:** Work from behind and to the sides of the support.

4. Mount the module in the support.
  - Use bolts and nuts supplied with the support.

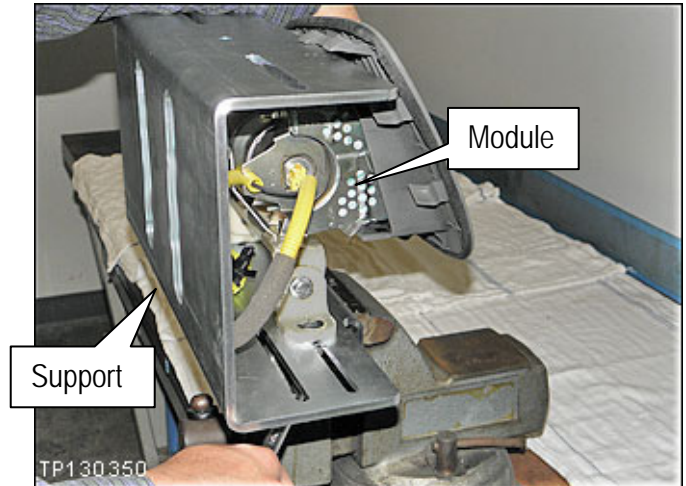


Figure M3

5. Make sure the module is centered in the support.

**NOTE:** Centering the module in the support will allow access to the inflator securing nuts through the slots in the support.

6. Tighten all of the mounting bolts and nuts that hold the module to the support.

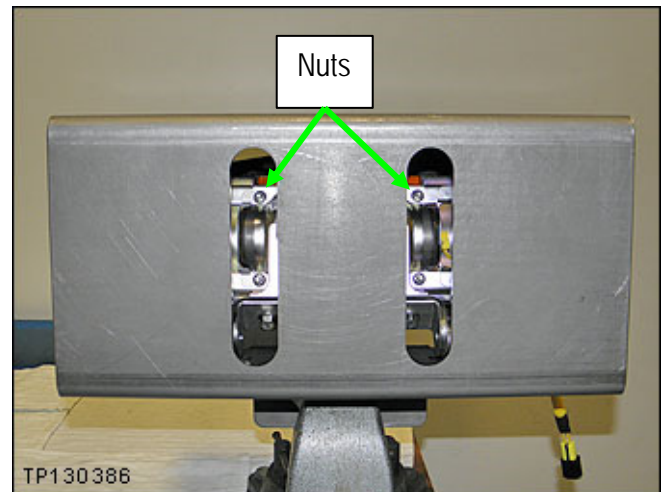


Figure M4

7. Carefully cut a few inches of the yellow corrugated harness cover in the area shown.
  - **Do not** cut the wires inside the corrugated cover.

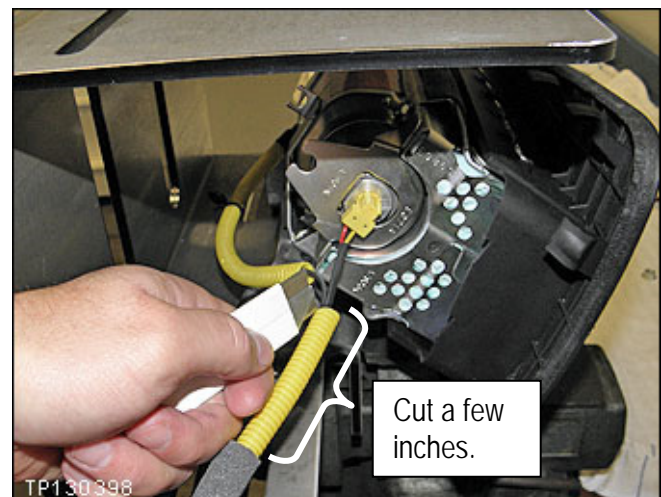


Figure M5

8. Attach 2 shorting pins to the inflator harness as shown.

- Make sure to pair the wires from each end of the inflator.

**Blue with White**

**Red with Yellow**

- Use an insulation displacement type wire connector as a shorting pin.
- Refer to the Parts Information for additional connector/shorting pin information.

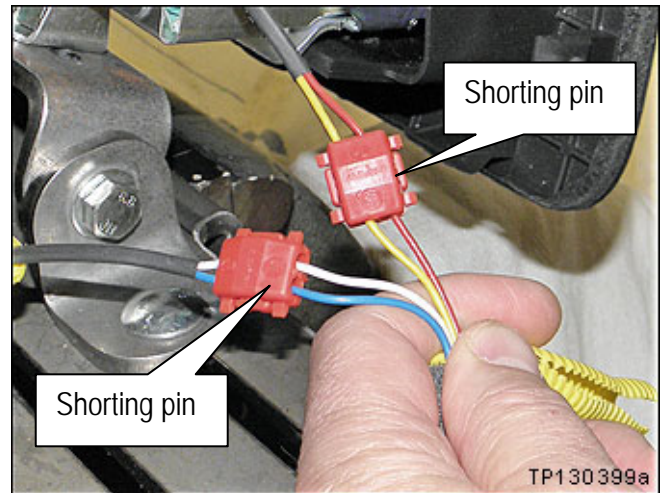


Figure M6

9. Cut off the connector end of the harness.



Figure M7

10. Remove the 4 nuts from the module that hold the inflator in place (see Figures M8 and M9).

- Use a ratchet and extension.



Figure M8

- Remove the 4 nuts.

NOTE: These nuts will not be reused.

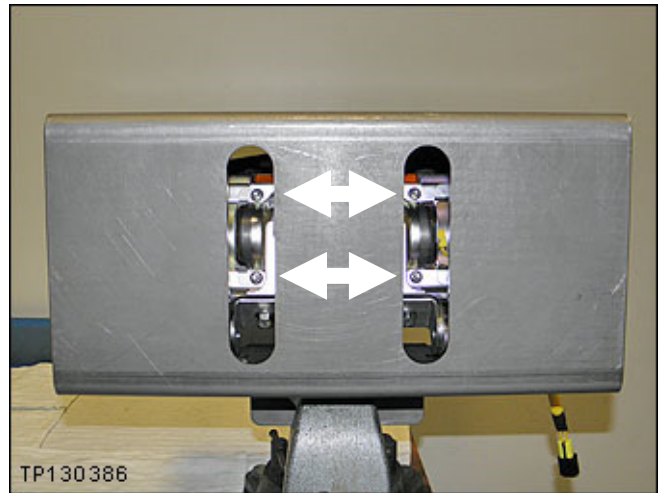


Figure M9

11. Remove the inflator stopper.

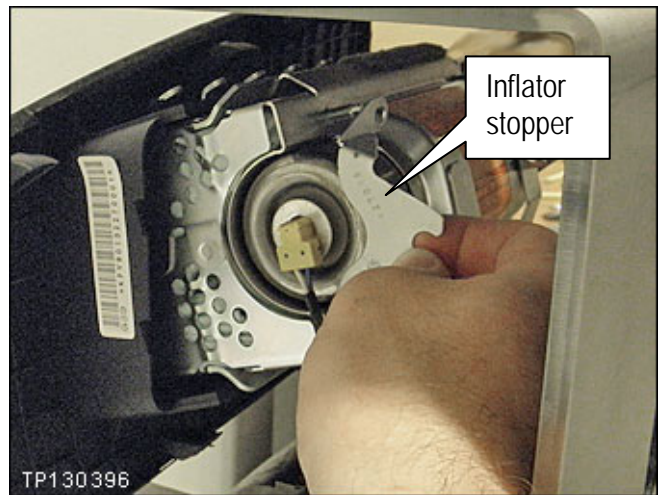


Figure M10

12. Push the right side of the inflator out of the module.

- Twist the inflator to a position that will allow the connector and harness to fit through the opening.

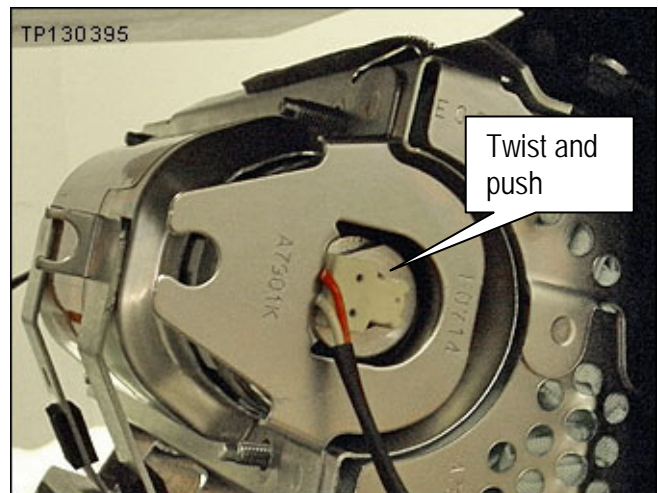


Figure M11

13. Pull the inflator completely out of the module from the left side.
14. Set the old inflator in the clean working area and make sure it does not roll and fall to the floor.

**NOTE:**

- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Takata supplied return instructions are also attached to this bulletin on page 35.



Figure M12

15. Remove the new inflator from the box.
16. Slide the new inflator into the module from the left side.

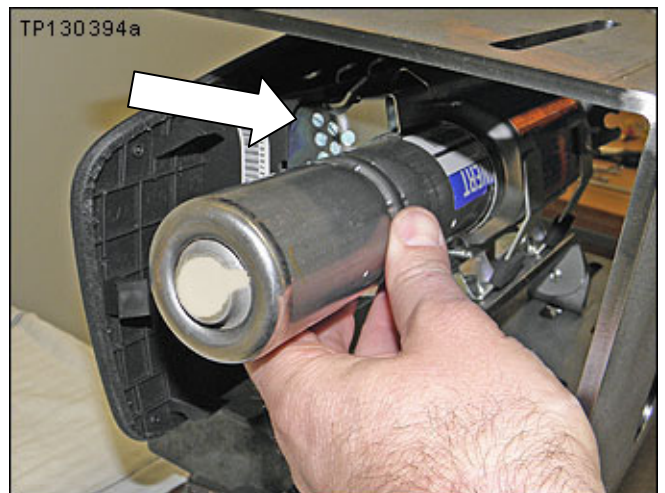


Figure M13

17. Make sure the inflator is positioned / oriented correctly as shown.
  - The flat side of the inflator end (on the right side) must align with the flat side of the inflator housing.

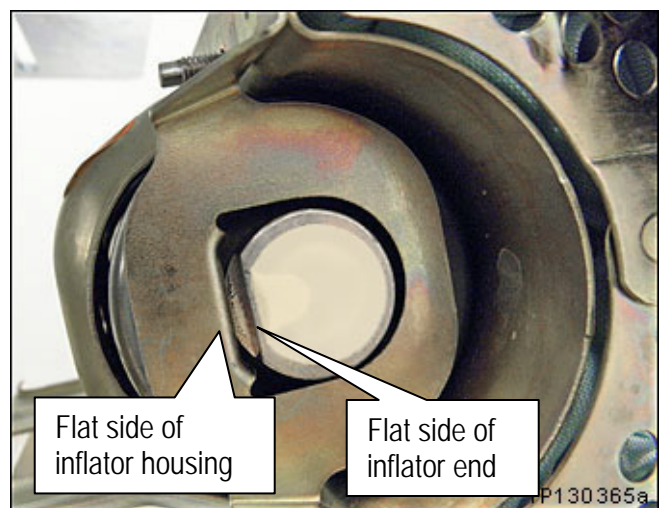


Figure M14

18. Install the inflator stopper and 4 inflator securing nuts finger tight (see Figure M15).

- Make sure to use new nuts.
- New nuts are included with the new inflator.

19. Make sure the inflator is pushed all the way into its housing – no gap on the right side (see Figure M15).

20. Make sure there is no gap between the inflator stopper and the inflator on the left side (see Figure M15).

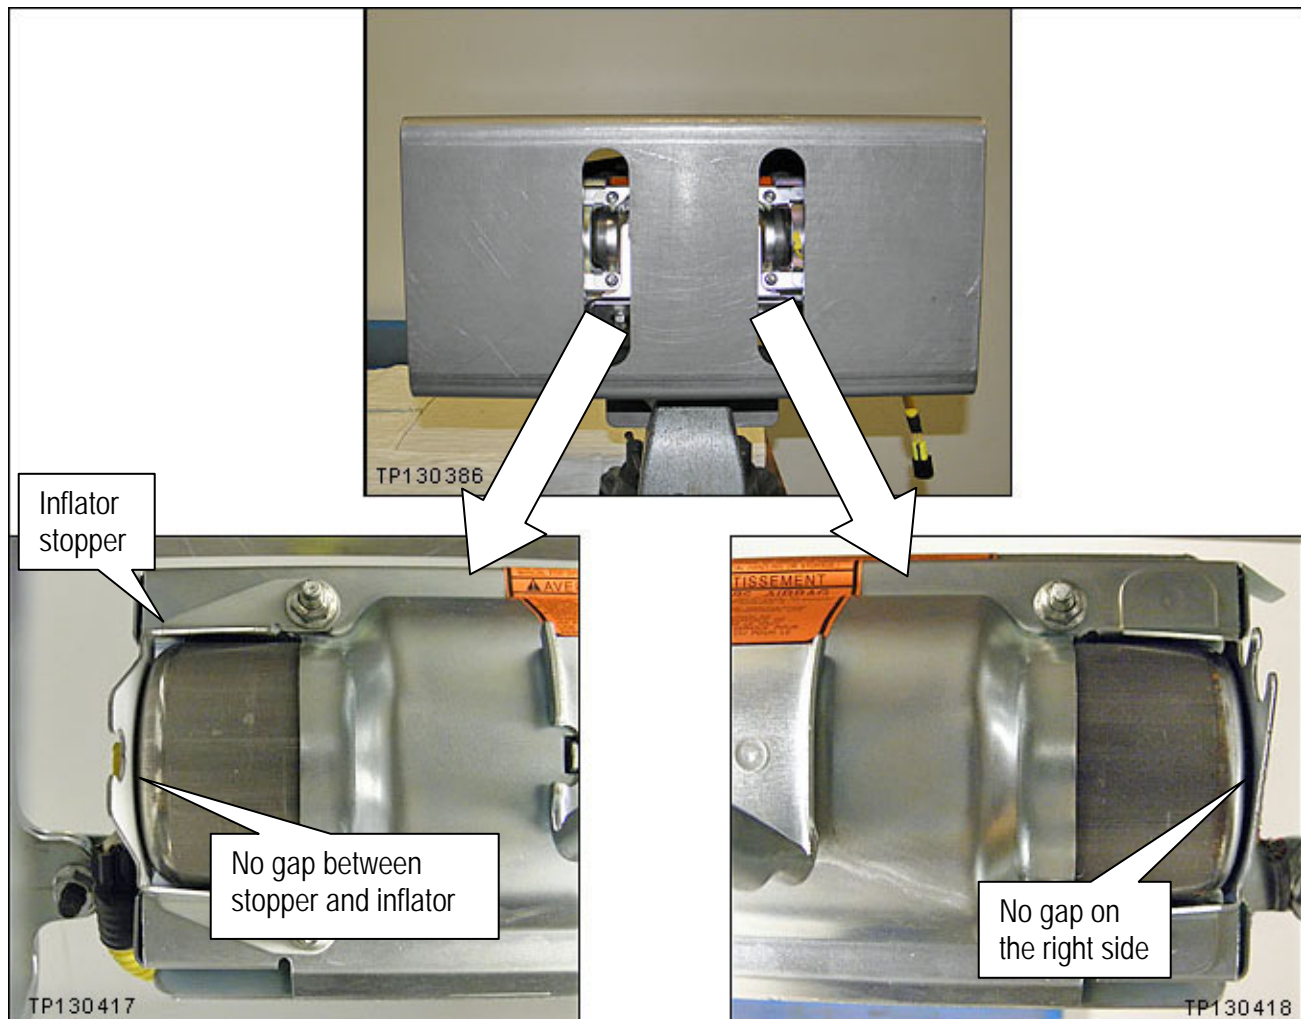


Figure M15

21. Torque the 4 inflator securing nuts.

- Torque nuts to:  
3.9 N·m (0.39 kg·m, 34 in-lb).
- Torque in the order shown.


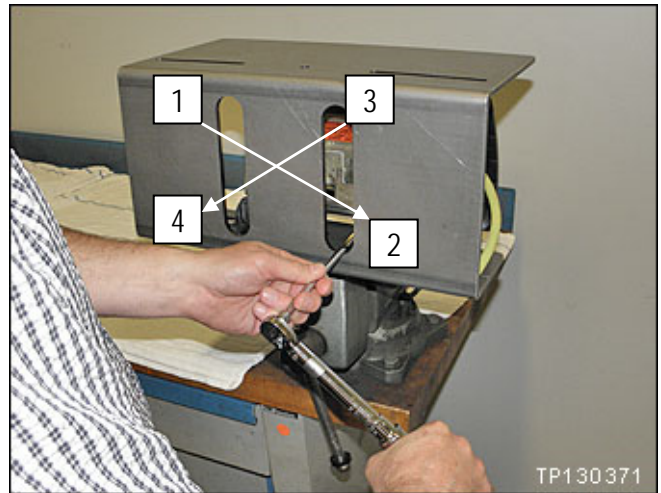


Figure M16

**IMPORTANT:**

- In the next step you will be attaching the new harness to the new inflator.
- Once the inflator connector is attached to the inflator, it cannot be disconnected.
- Make sure to attach the connectors to the correct ends of the inflator (see M17).
  - Left / Right orientation is as shown in Figure M17.

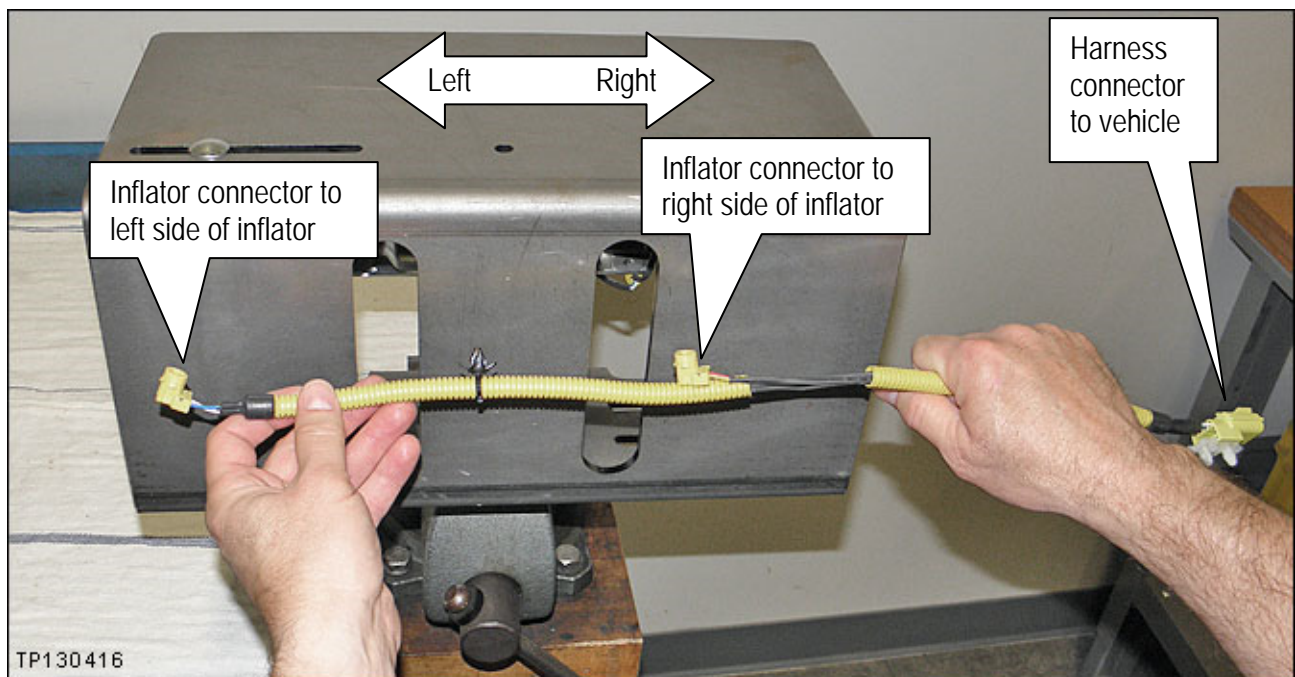

M17

22. Attach the new harness to each end of the inflator.

- Remove the dust proof stickers covering the ends of the inflator.
- A new harness is included with the new inflator.
- Make sure to attach the correct ends (see Figure M17 on the previous page).
- Refer to Figures M17, M18, M19, and M20.

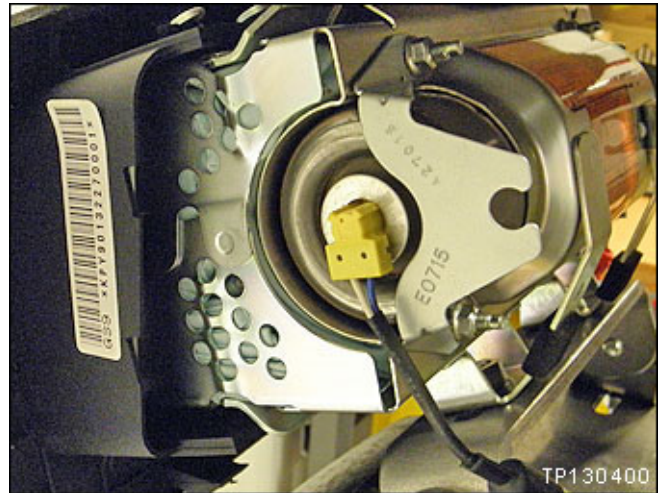


Figure M18

- Make sure the T shape at the inflator end aligns with the T shape of the connector.

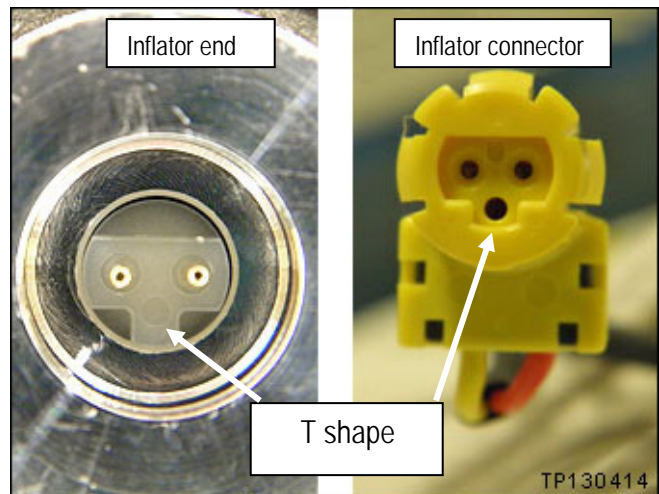


Figure M19

- Make sure the harness connector is fully engaged / seated (see Figure M20).

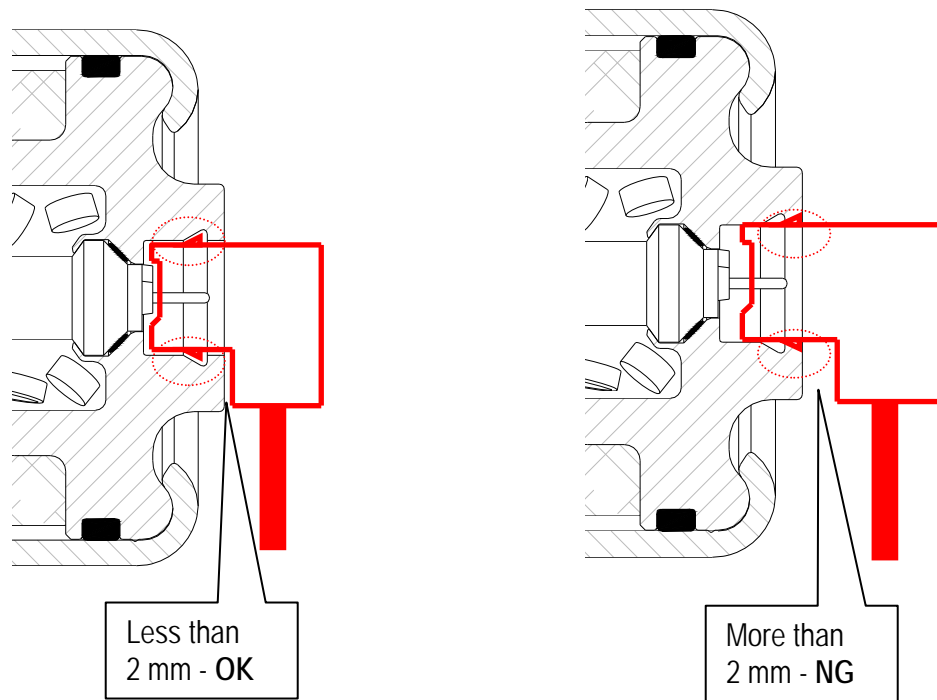


Figure M20

23. Remove the module from the support and set it on the clean working area.

24. Remove the support bracket from the module frame.

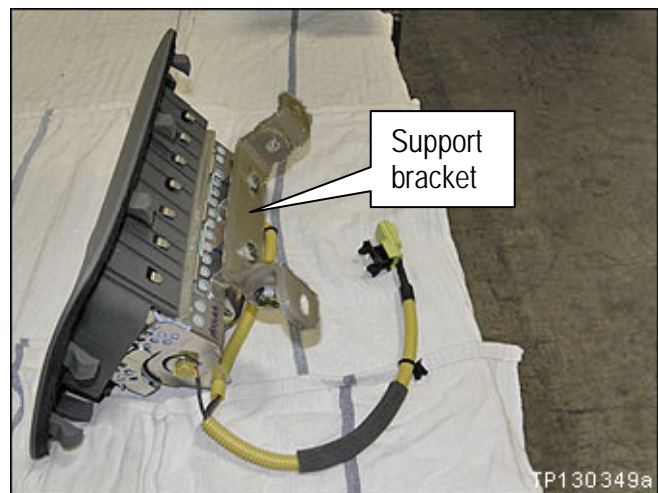


Figure M21

25. Attach the harness clip to the module frame.

26. Route/attach the harness to the harness guides.

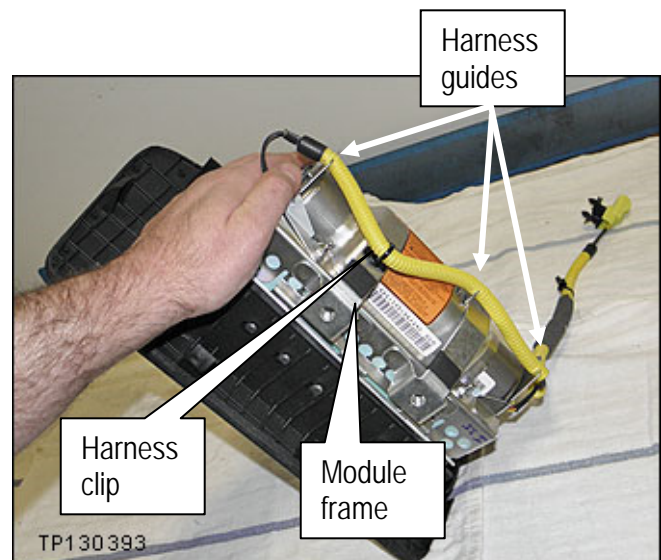


Figure M22

**NOTE:**

- Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.
- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

## **FX** Inflator replacement

**WARNING:** Wear safety glasses while performing inflator replacement.

1. Set the module on a clean working area.
2. Disconnect the harness clip from the module frame.

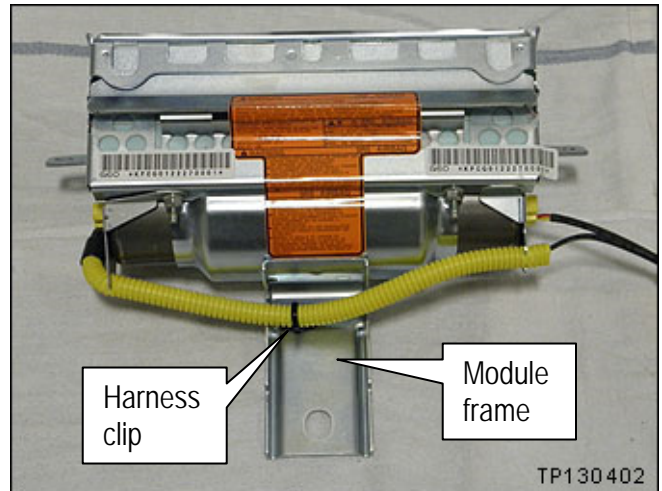


Figure F1

3. Attach the FX brackets to the support as shown.
  - Make sure the convex parts of the brackets are in the UP position.
  - Use bolts and nuts supplied with the support.
  - Leave the bolts/nuts slightly loose to allow for positioning of the module.

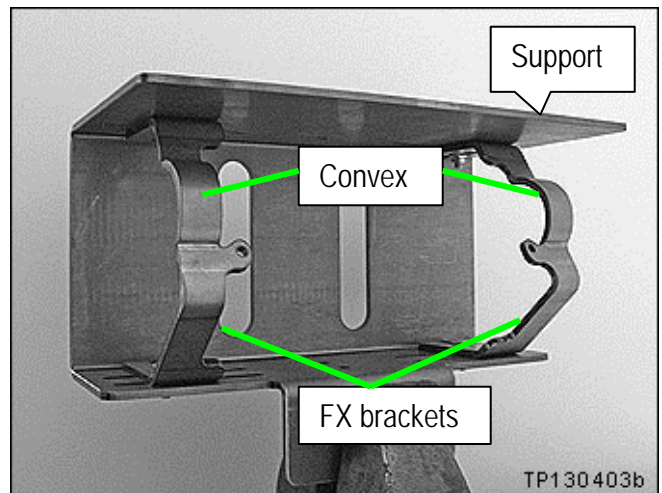


Figure F2

4. Attach the module to the FX brackets in the support as shown.
  - Use bolts and nuts supplied with the support.
  - Make sure the arrow on the bag is pointing up.

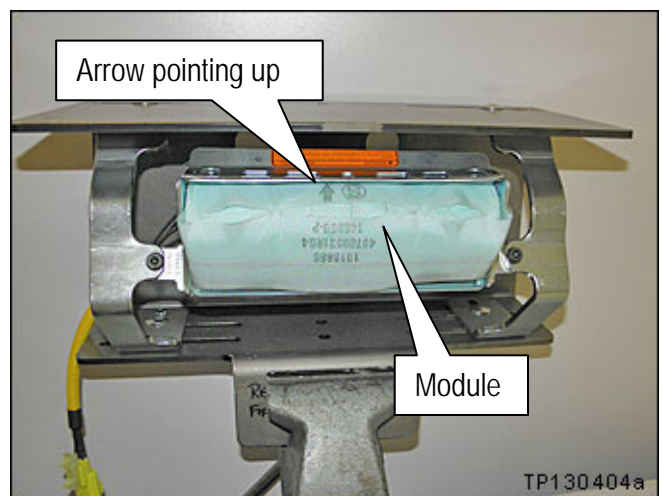


Figure F3

5. Make sure the module is centered in the support.

**NOTE:** Centering the module in the support will allow access to the inflator securing nuts through the slots in the support.

6. Tighten all of the mounting bolts and nuts that hold the module and brackets to the support.

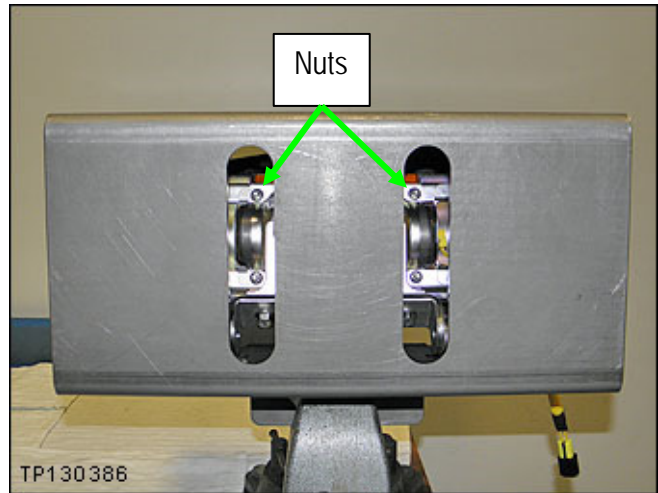


Figure F4

**WARNING:** Work from behind and to the sides of the support.

7. Carefully cut a few inches of the yellow corrugated harness cover in the area shown.

- Do not cut the wires inside the corrugated cover.

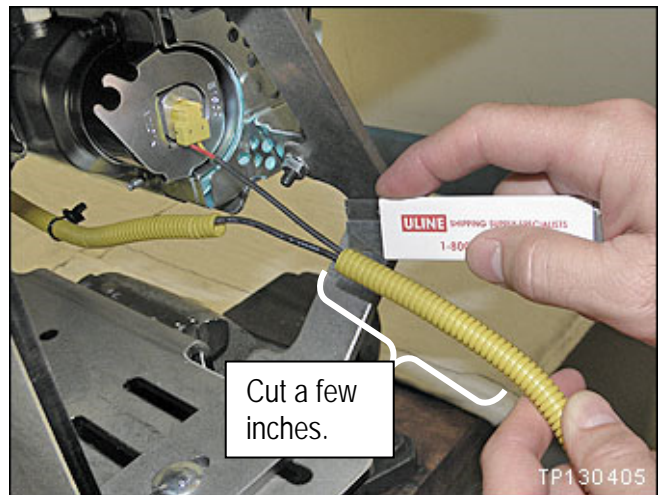


Figure F5

8. Attach 2 shorting pins to the inflator harness as shown.

- Make sure to pair the wires from each end of the inflator.

**Blue with White**

**Red with Yellow**

- Use an insulation displacement type wire connector as a shorting pin.
- Refer to the Parts Information for additional connector/shorting pin information.

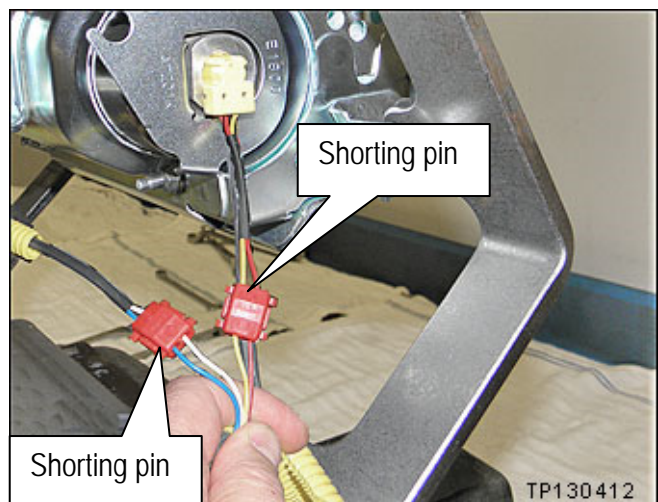


Figure F6

9. Cut off the connector end of the harness.



Figure F7

10. Remove the 4 nuts from the module that hold the inflator in place (see Figures F8 and F9).

- Use a ratchet and extension.



Figure F8

- Remove the 4 nuts.

NOTE: These nuts will not be reused.

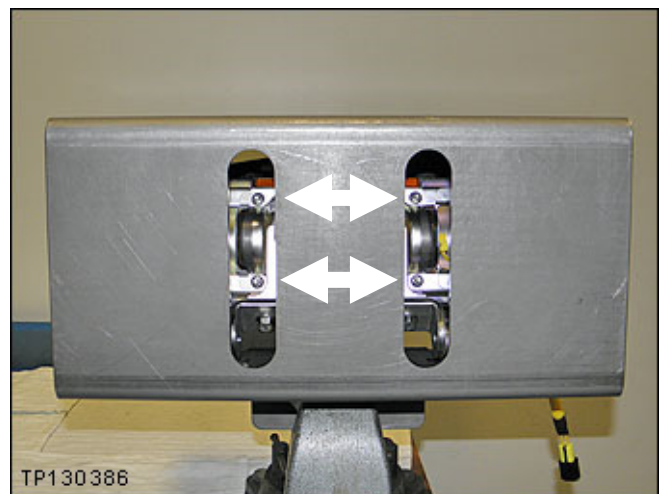


Figure F9

11. Remove the inflator stopper.

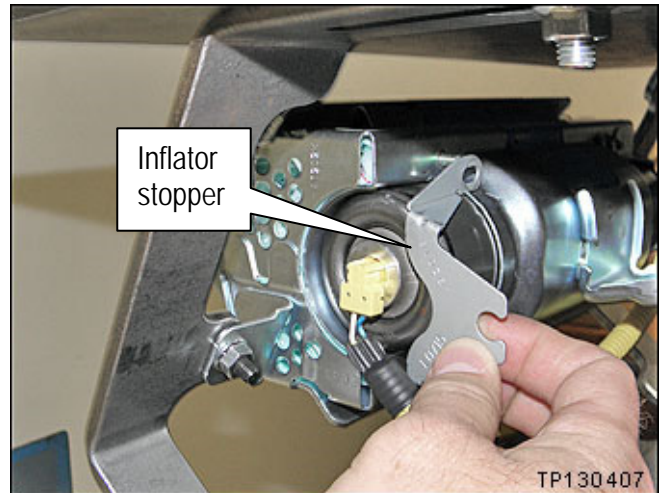


Figure F10

12. Push the right side of the inflator out of the module.

- Twist the inflator to a position that will allow the connector and harness to fit through the opening.

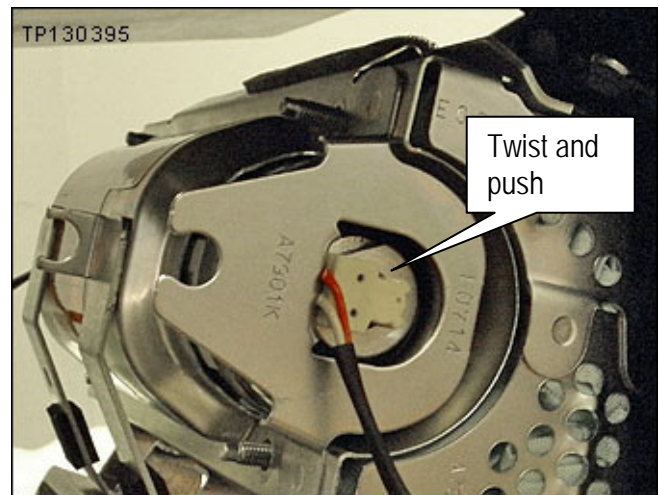


Figure F11

13. Pull the inflator completely out of the module from the left side.



Figure F12

14. Set the old inflator in the clean working area and make sure it does not roll and fall to the floor.

**NOTE:**

- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

15. Remove the new inflator from the box.

16. Slide the new inflator into the module from the left side.



Figure F13

17. Make sure the inflator is positioned / oriented correctly as shown.

- The flat side of the inflator end (on the right side) must align with the flat side of the inflator housing.

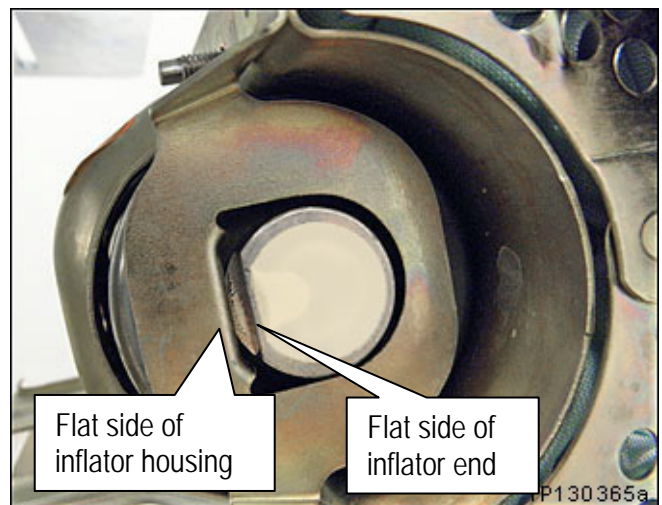


Figure F14

18. Install the inflator stopper and 4 inflator securing nuts finger tight (see Figure F15).

- Make sure to use new nuts.
- New nuts are included with the new inflator.

19. Make sure the inflator is pushed all the way into its housing – no gap on the right side (see Figure F15).

20. Make sure there is no gap between the inflator stopper and the inflator on the left side (see Figure F15).

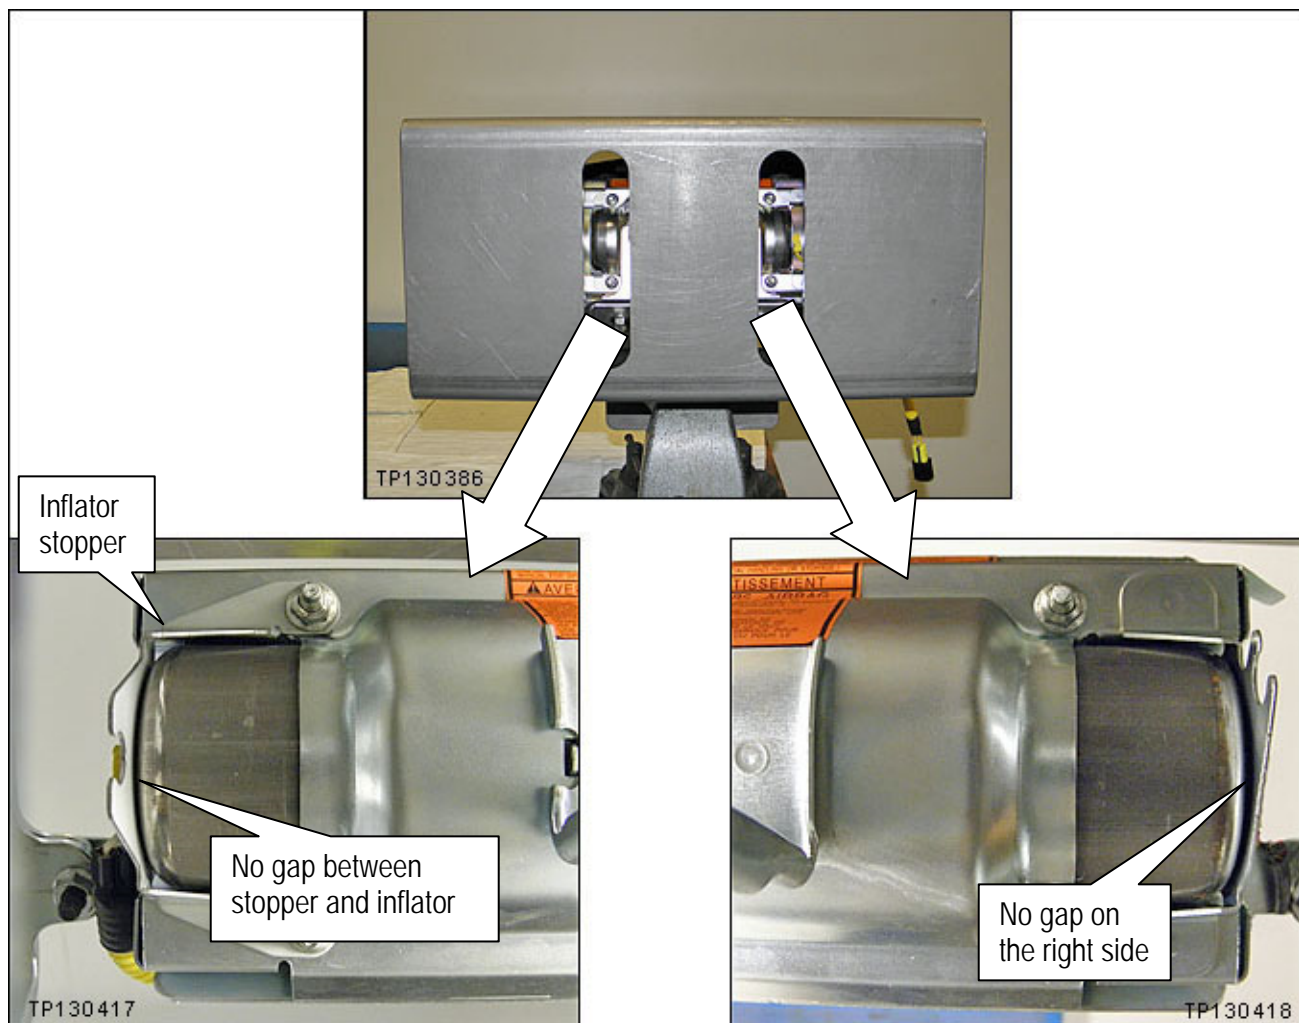


Figure F15

21. Torque the 4 inflator securing nuts.

- Torque nuts to:  
3.9 N·m (0.39 kg·m, 34 in·lb).
- Torque in the order shown.

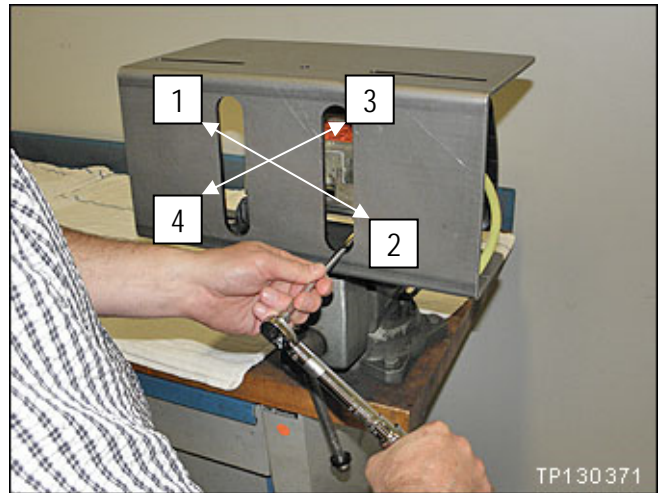


Figure F16

**IMPORTANT:**

- In the next step you will be attaching the new harness to the new inflator.
- Once the inflator connector is attached to the inflator, it cannot be disconnected.
- Make sure to attach the connectors to the correct ends of the inflator (see F17).
  - Left / Right orientation is as shown in Figure F17.

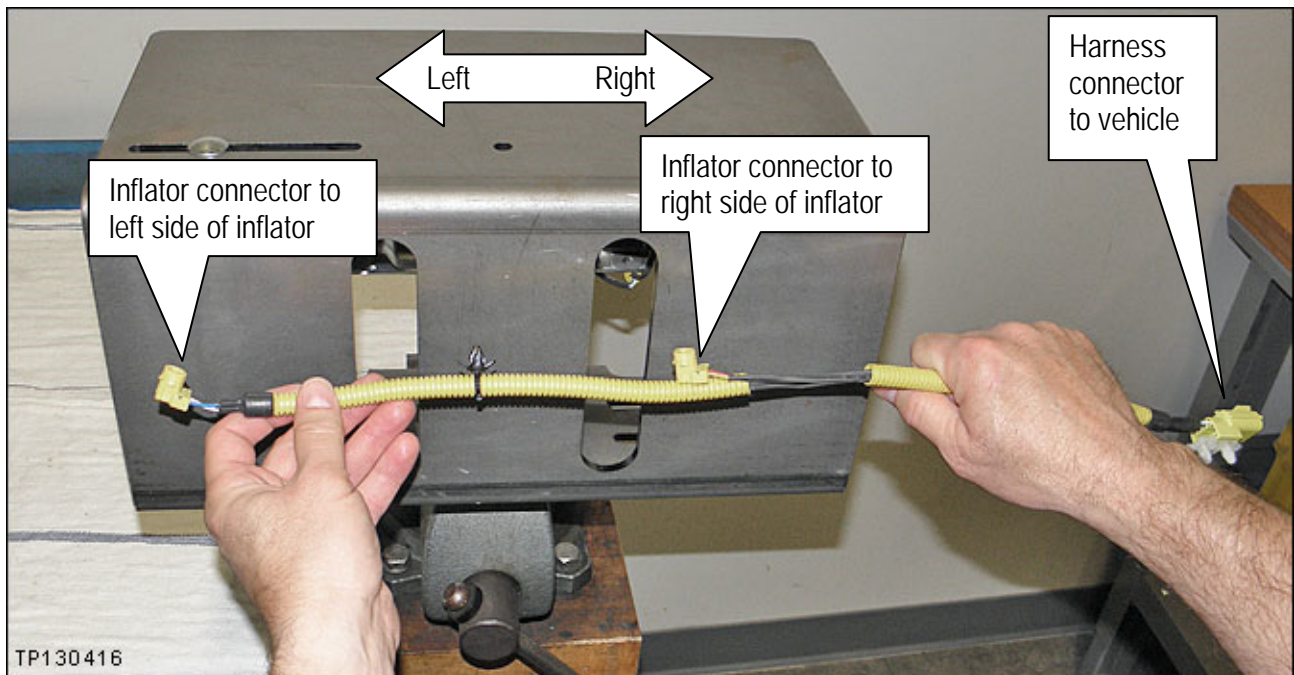


Figure F17

22. Attach the new harness to each end of the inflator.

- Remove the dust proof stickers covering the ends of the inflator.
- A new harness is included with the new inflator.
- Make sure to attach the correct ends (see Figure F17 on the previous page).
- Refer to Figures F17, F18, F19, and F20.

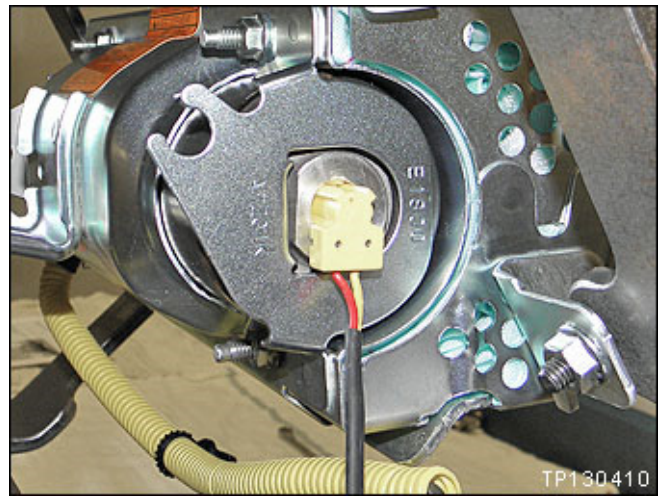


Figure F18

- Make sure the T shape at the inflator end aligns with the T shape of the connector.

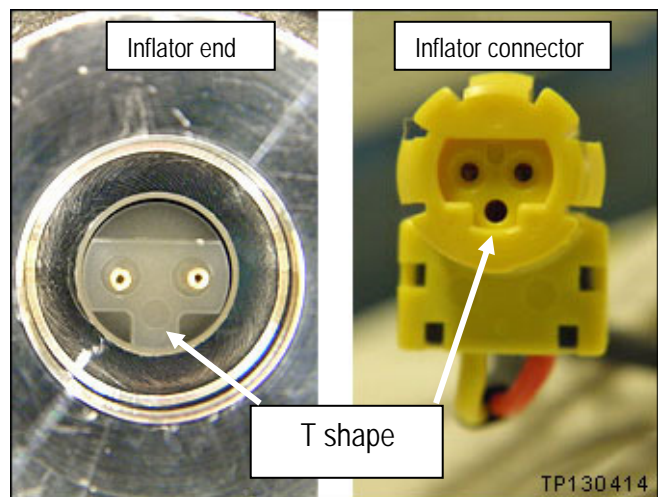


Figure F19

- Make sure harness connector is fully engaged / seated (see Figure F20).

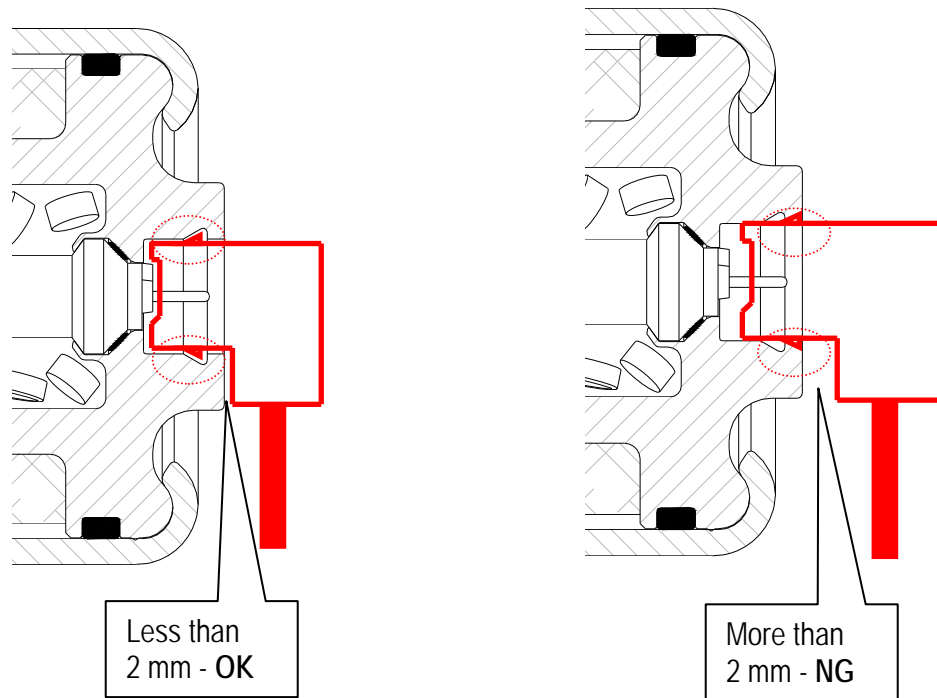


Figure F20

23. Remove the module from the support and set it on the clean working area.

24. Attach the harness clip to the module frame.

25. Clip the harness into the harness guides.

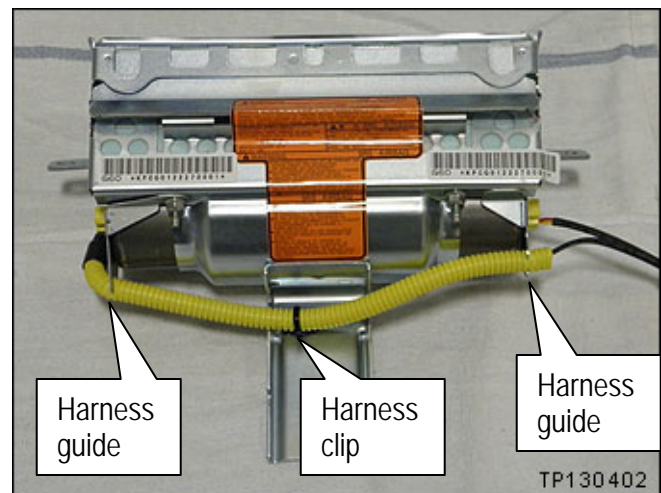


Figure F21

**NOTE:**

- Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.
- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

## M Inflator replacement

**IMPORTANT:** Connection of the new harness for the M is different than the I35 or FX. Make sure to read the harness connection instructions.

**WARNING:** Wear safety glasses while performing inflator replacement.

1. Set the module on a clean working area.
2. Unclip the harness from the harness guides.

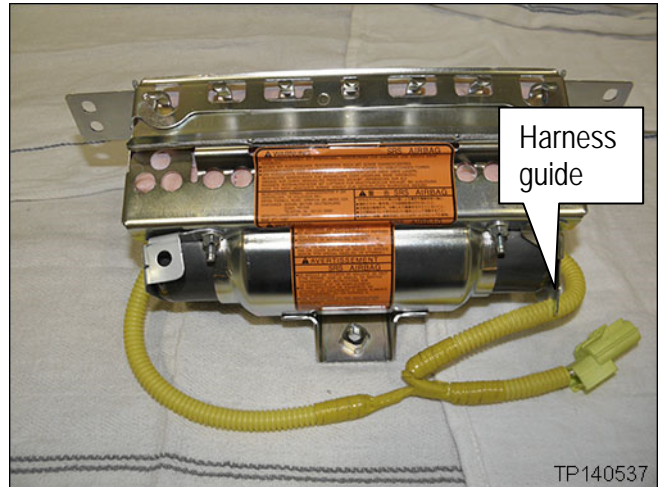


Figure Y1

3. Attach the FX brackets to the support as shown.
  - Make sure the convex parts of the brackets are in the UP position.
  - Use bolts and nuts supplied with the support.
  - Leave the bolts/nuts slightly loose to allow for positioning of the module.

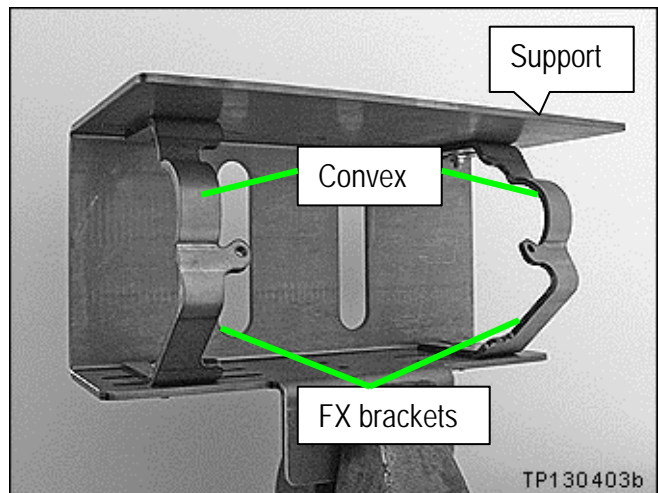


Figure Y2

4. Attach the module to the FX brackets in the support as shown.
  - Use bolts and nuts supplied with the support.
  - Make sure the arrow on the bag is pointing down.

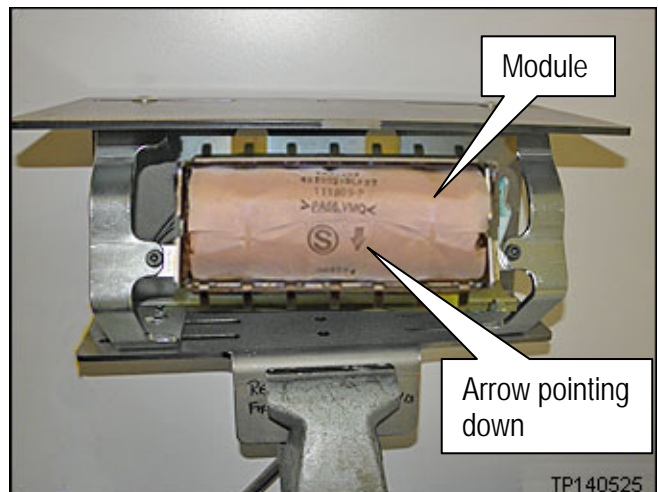


Figure Y3

5. Make sure the module is centered in the support.

**NOTE:** Centering the module in the support will allow access to the inflator securing nuts through the slots in the support.

6. Tighten all of the mounting bolts and nuts that hold the module and brackets to the support.

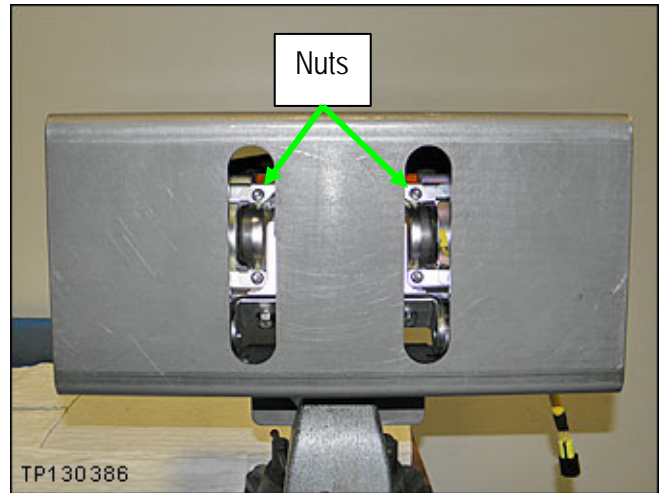


Figure Y4

**WARNING:** Work from behind and to the sides of the support.

7. Carefully cut a few inches of the yellow corrugated harness cover in the area shown.

- Do not cut the wires inside the corrugated cover.

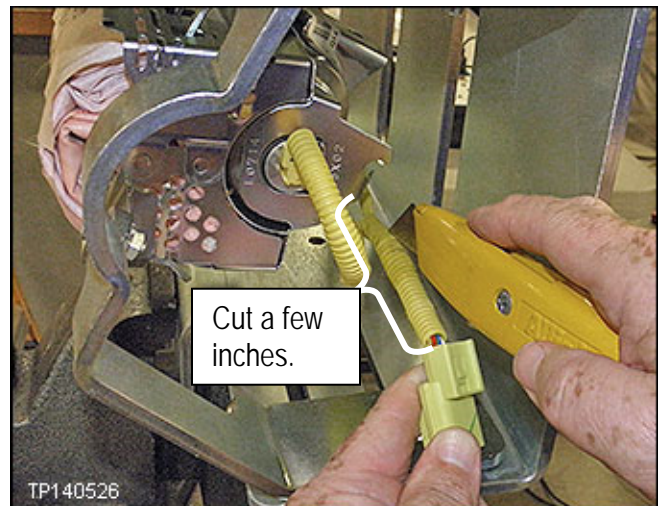


Figure Y5

8. Attach 2 shorting pins to the inflator harness as shown.

- Make sure to pair the wires from each end of the inflator.

**Blue with White**

**Red with Yellow**

- Use an insulation displacement type wire connector as a shorting pin.
- Refer to the Parts Information for additional connector/shorting pin information.

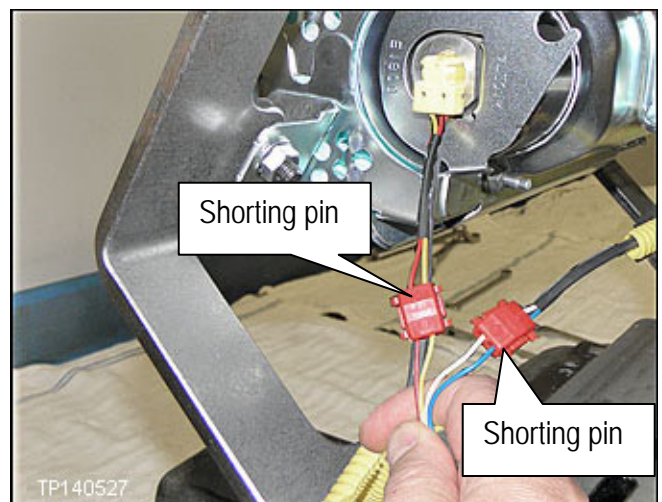


Figure Y6

9. Cut off the connector end of the harness.



Figure Y7

10. Remove the 4 nuts from the module that hold the inflator in place (see Figures Y8 and Y9).

- Use a ratchet and extension.



Figure Y8

- Remove the 4 nuts.

NOTE: These nuts will not be reused.

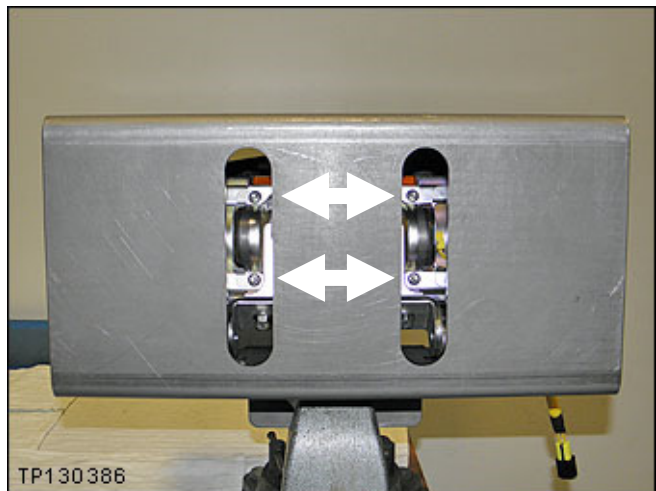


Figure Y9

11. Remove the inflator stopper.

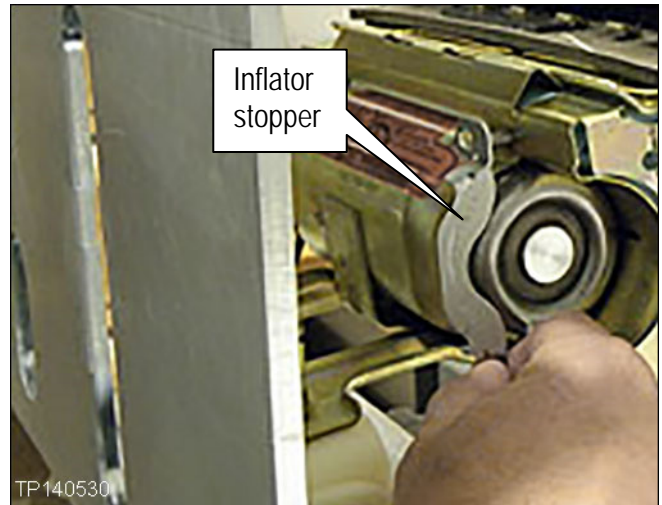


Figure Y10

12. Push the left side of the inflator out of the module.

- Twist the inflator to a position that will allow the connector and harness to fit through the opening.

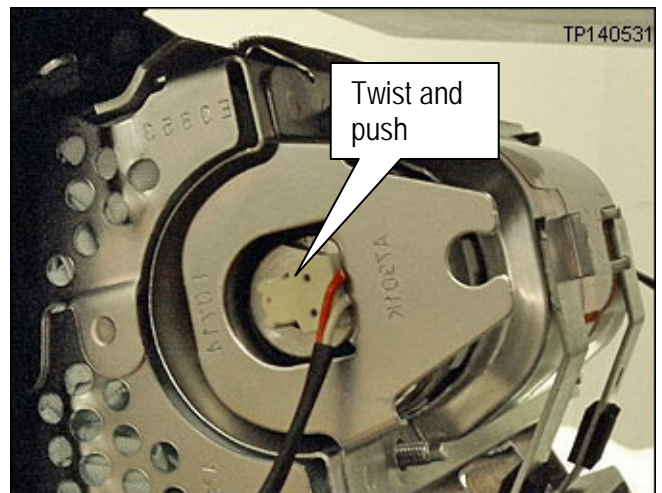


Figure Y11

13. Pull the inflator completely out of the module from the right side.



Figure Y12

14. Set the old inflator in the clean working area and make sure it does not roll and fall to the floor.

**NOTE:**

- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

15. Remove the new inflator from the box.

16. Slide the new inflator into the module from the right side.



Figure Y13

17. Make sure the inflator is positioned / oriented correctly as shown.

- The flat side of the inflator end (on the left side) must align with the flat side of the inflator housing.

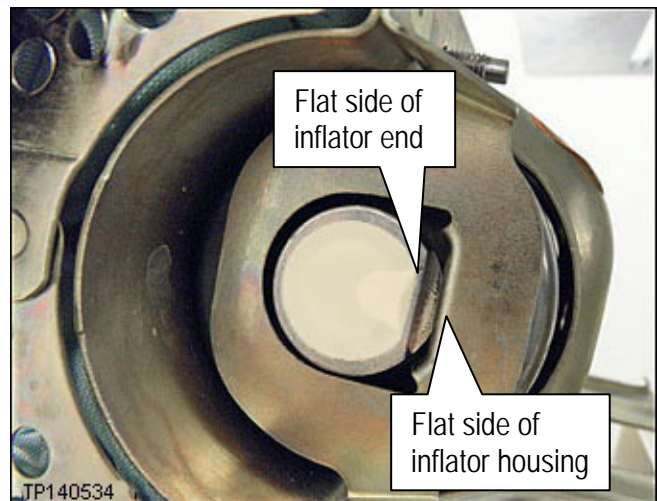


Figure Y14

18. Install the inflator stopper and 4 inflator securing nuts finger tight (see Figure Y15).

- Make sure to **use new nuts**.
- New nuts are included with the new inflator.

19. Make sure the inflator is pushed all the way into its housing – no gap on the left side (see Figure Y15).

20. Make sure there is no gap between the inflator stopper and the inflator on the right side (see Figure Y15).

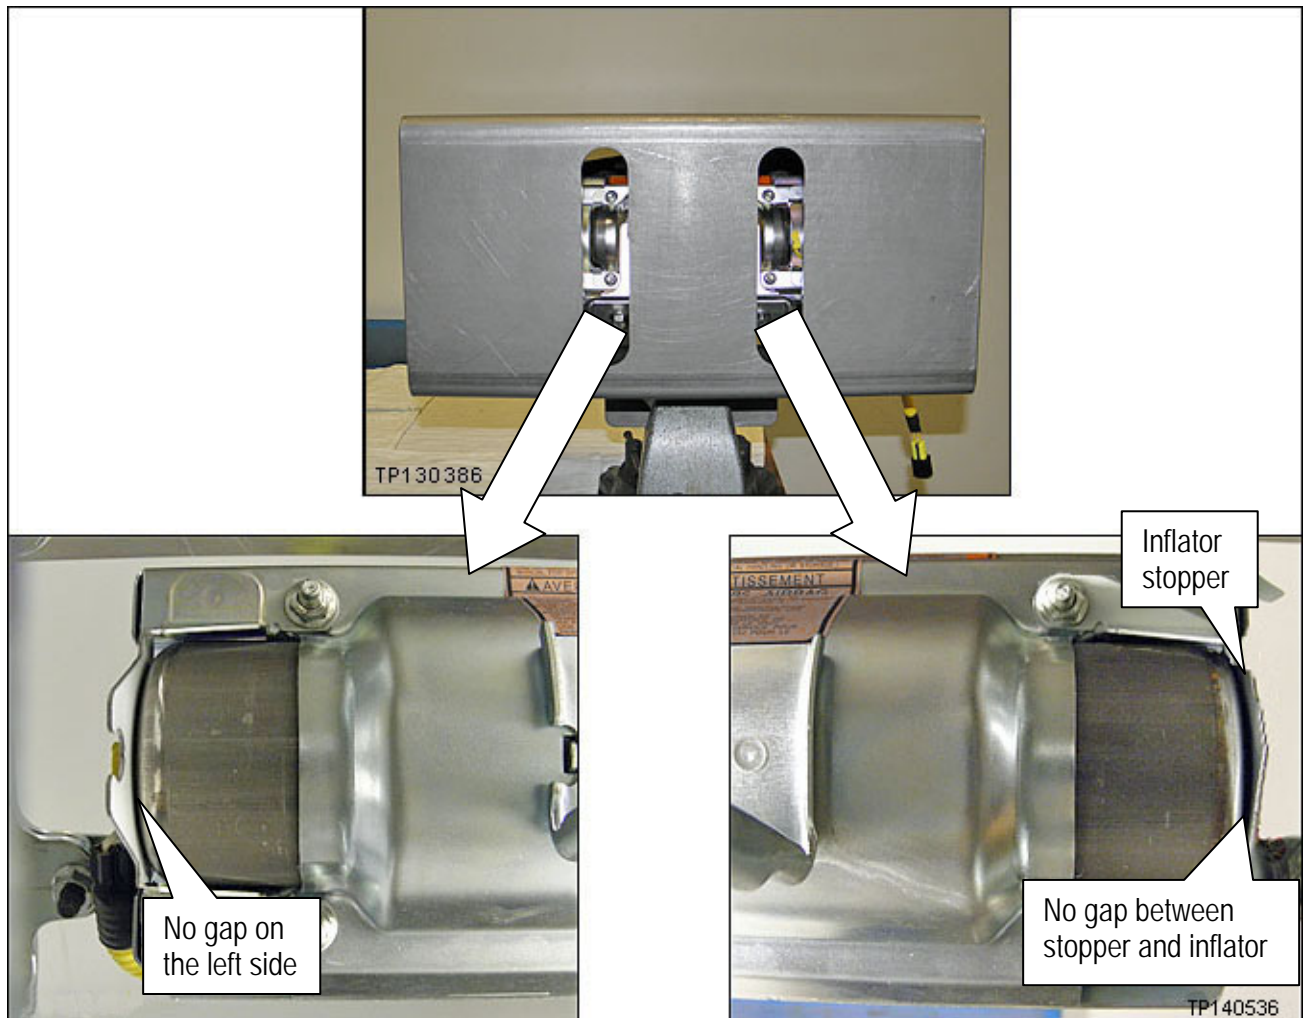


Figure Y15

21. Torque the 4 inflator securing nuts.

- Torque nuts to:  
3.9 N·m (0.39 kg-m, 34 in-lb).
- Torque in the order shown.

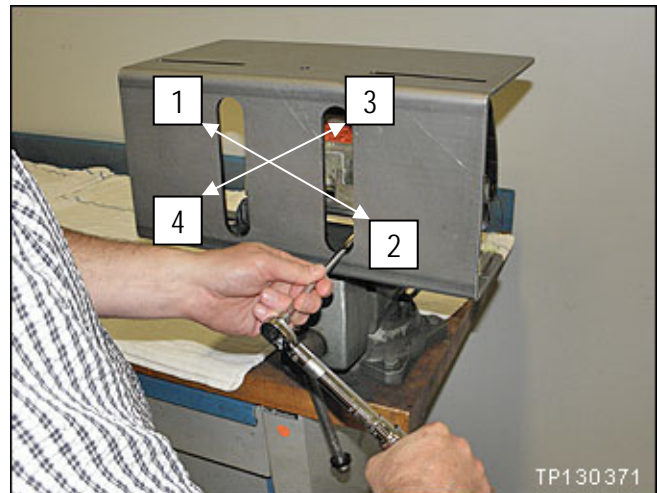


Figure Y16

**IMPORTANT:**

- In the next step, on the next page, you will be attaching the new harness to the new inflator.
- Once the inflator connector is attached to the inflator, it cannot be disconnected.
- Make sure to attach the connectors to the correct ends of the inflator (see Figure Y17).

22. Attach the new harness to each end of the inflator.

- Remove the dust proof stickers covering the ends of the inflator.
- Refer to Figures Y17, Y18, and Y19.

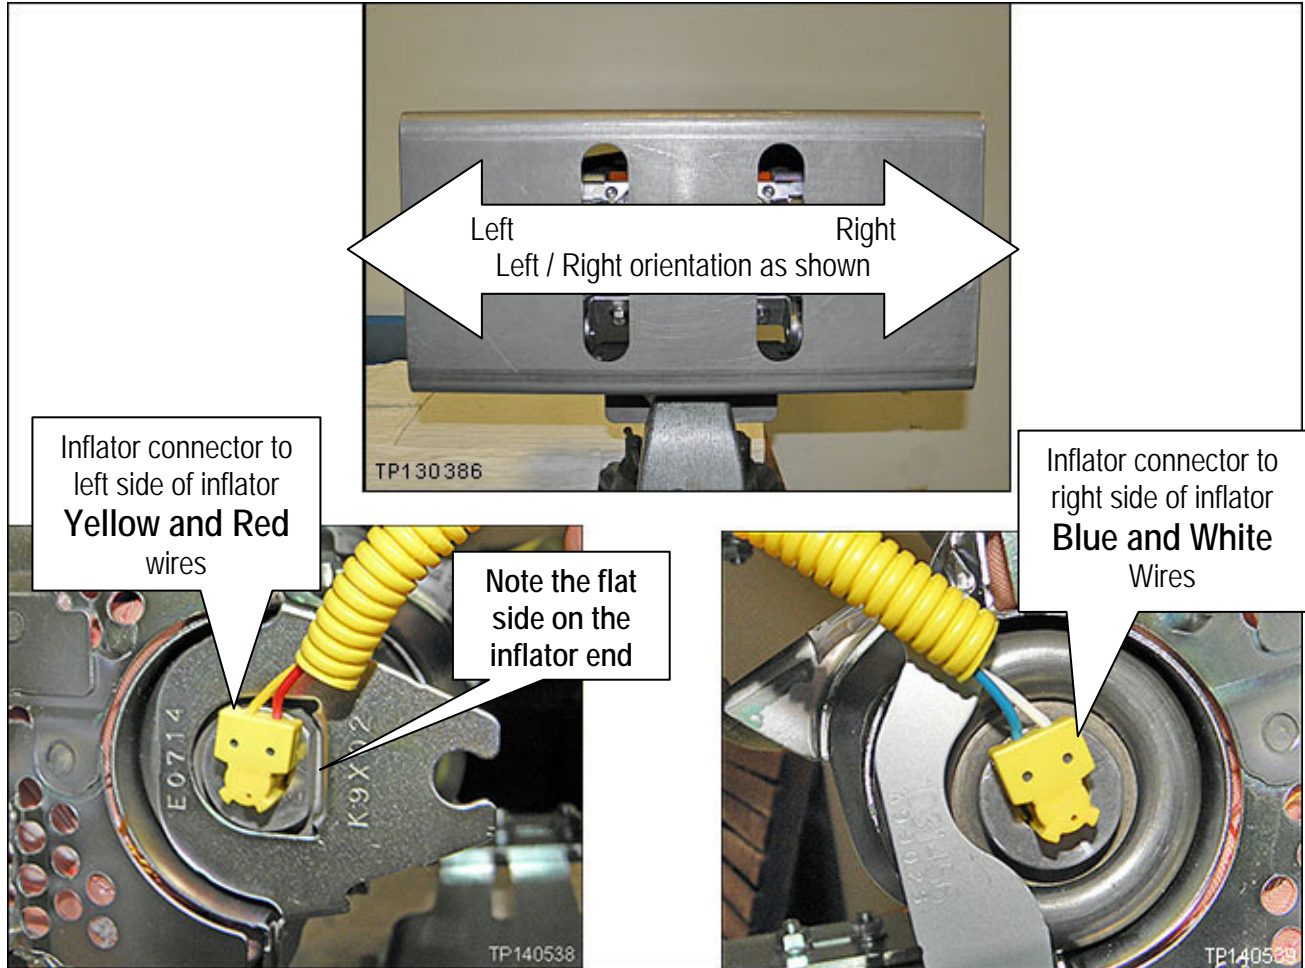


Figure Y17

- Make sure the T shape at the inflator end aligns with the T shape of the connector.

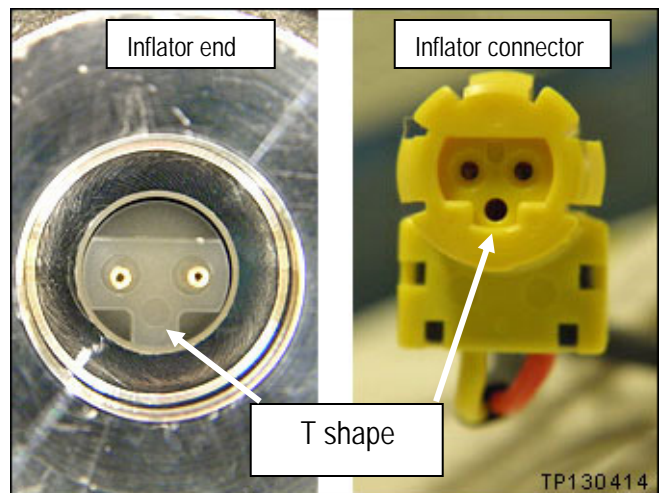


Figure Y19

- Make sure harness connector is fully engaged / seated (see Figure Y19).

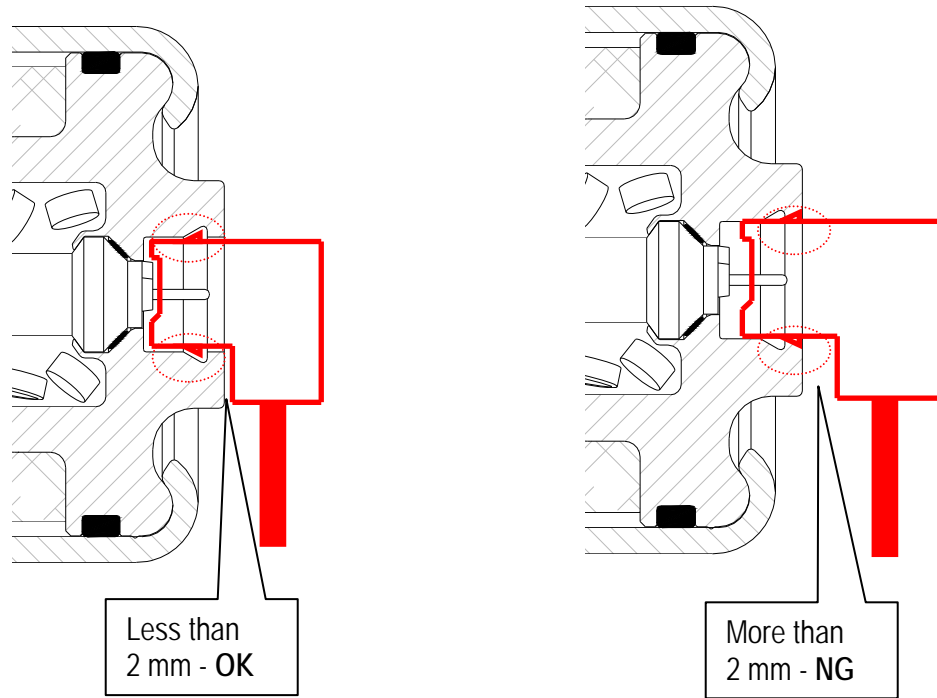


Figure Y19

23. Remove the module from the support and set it on the clean working area.

24. Clip the harness into the harness guides.

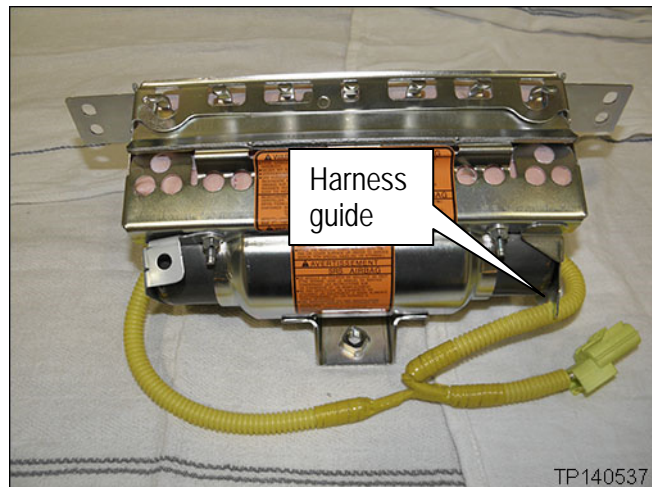



Figure Y20

**NOTE:**

- Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.
- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

## PARTS INFORMATION

Description	MODEL	PART #	Quantity
<b>Inflator</b> (Includes inflator, harness, module mounting bolts, and inflator securing nuts)	I35	K8E61-7994D (kit)	1
	FX	K8561-7994D (kit)	
	M	K85FA-7994D (kit)	
<b>Shorting Pin</b> (Insulation Displacement Connector for 22-18 gauge wire)  	N/A	NAPA item # 784566  Grainger Item # 4YT50  or equivalent available from local auto supply	2

### NOTE:

- Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.
- Follow the return instructions provided by Takata, which are included in the box with the new inflator.
- Return instructions provided by Takata are also attached to this bulletin on page 35.

**CLAIMS INFORMATION**

Submit a "CM" line claim using the following claims coding:

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
P4235	I35 - Remove and replace front passenger air bag inflator	P42350	0.8 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
P4235	FX - Remove and replace front passenger air bag inflator	P42352	1.1 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
P4235	M - Remove and replace front passenger air bag inflator	P42353	2.7 hrs.

**EXPENSE CODE**

CODE	DESCRIPTION	MAXIMUM AMOUNT
041	Shorting Pin (Insulation Displacement Connector for 22-18 gauge wire)	\$0.50

## INFLATOR RETURN INSTRUCTIONS

1. Print this page.
2. Fill in the information below.

VIN:	
Odometer Reading:	
Dealer Code:	
Dealership Address:	Street
	City
	State

**3. Put this page in the box with the old inflator.**

4. Follow the [Air Bag Inflator Return Packing & Shipping Instructions](#) on the next page.

**NOTE:** The instructions below are included in the box with the new inflator. These instructions also apply to 2004 I35, 2006 M and 2004-2005 FX.

## AIR BAG INFLATOR RETURN PACKING & SHIPPING INSTRUCTIONS

### 48 State FedEx Ground Shipment Preparation

Alaska and Hawaii dealers must contact the following for Packing, Shipping, and Documentation instructions.  
Miguel Prigadaa: By phone - 210-250-5078; 8:30 am to 5:00 pm EST, Monday through Friday. By email - [MLGTakataRestrains\\_International@menlowworldwide.com](mailto:MLGTakataRestrains_International@menlowworldwide.com)

These instructions support the mandatory return of the front passenger air bag inflator removed from 2001 to 2003 Model Year Sentra, Maxima, Pathfinder, QX4 and I35 vehicles and 2003 Model Year FX vehicles.

**NOTE:** Do not deploy the inflators. Return the removed inflators promptly.

1. Ensure that a shorting pin has been connected to the inflator harness(s).

Refer to NTB13-062 or ITB13-018.

2. Place the un-deployed inflator in the "cradle" of the shipping box (the box the new inflator came in). Do not include any other hardware in the box that may rattle and cause rejection of the shipment.

3. Close the box flap per the box instructions.

4. Firmly tape the box flap as follows (see images of box included with these instructions):

Use 2-inch wide clear packing tape.

Tape strip must be a minimum of 4 inches long.

There must be at least 2 inches of the 4-inch tape strip on the flap of the box and at least 2 inches on the bottom of the box.

5. Complete and affix the FedEx Ground paperwork as follows:

Hazardous Materials Certification form (OP-900PRP) included with these instructions.

**NOTE:** As needed, refer to images of the box included with these instructions.

a. Separate the bottom 4 labels and place them in the re-closeable pouch. Affix the re-closeable pouch to the bottom of the box. (A re-closeable pouch is included with these instructions).

b. Fill in the pick-up location, company name and address (Nissan/Infiniti Dealer) and the Chemtrec Contact Number (CCN) on the two removable label strips titled; FedEx Copy, and Customers Copy. Each dealer will have their own specific CCN number, which can be found on NNANET.

c. Put the shipping date on the "FedEx copy" and the "Customer copy" labels.

d. Peel off the "Apply to box" label and firmly apply it to the box flap.

e. On the "FedEx copy" and the "Customer copy labels", fill in the 15 digit Tracking ID.

The 15-digit tracking ID is found beneath the large barcode on the FedEx PRP label included with these instructions.

The 15-digit tracking ID is also on the peel off "Shipper Receipt" and "Receipt" labels at the top of the FedEx PRP label.

f. Keep the "Customer copy" label for dealer records and retain it for a minimum of 2 years.

g. Give the "FedEx copy" label to the FedEx Ground Driver.

FedEx Ground Package Returns Program (PRP) shipping label (included with these instructions)

a. Fill in the "From" information; (Nissan/Infiniti dealer name and address). The RMA# is not needed.

b. Peel off the label and affix it to the top of the box to the left of the Class 9 label. Use the scribe marks on the box as a guide so the PRP label does not touch any portion of the Class 9 label or its border.

c. When the shipment is ready, call for a FedEx Ground pick-up using the number listed for business locations (888-777-6040), or, if you receive regular pick-ups, give the package to your FedEx Ground Driver.

6. Cautions:


a. Remove or black-out any old shipping labels or barcodes (not "hazard" marks or labeling).

b. Take care not to cover any portion of the Class 9 label, proper shipping name, UN number, or UN box specifications.

c. Prior to shipment, ensure all steps have been properly completed. All packages must be prepared in accordance with all DOT and FedEx Ground requirements. Incomplete or missing information will result in return to sender and delay of return credit.

Self adhesive re-closeable pouch:

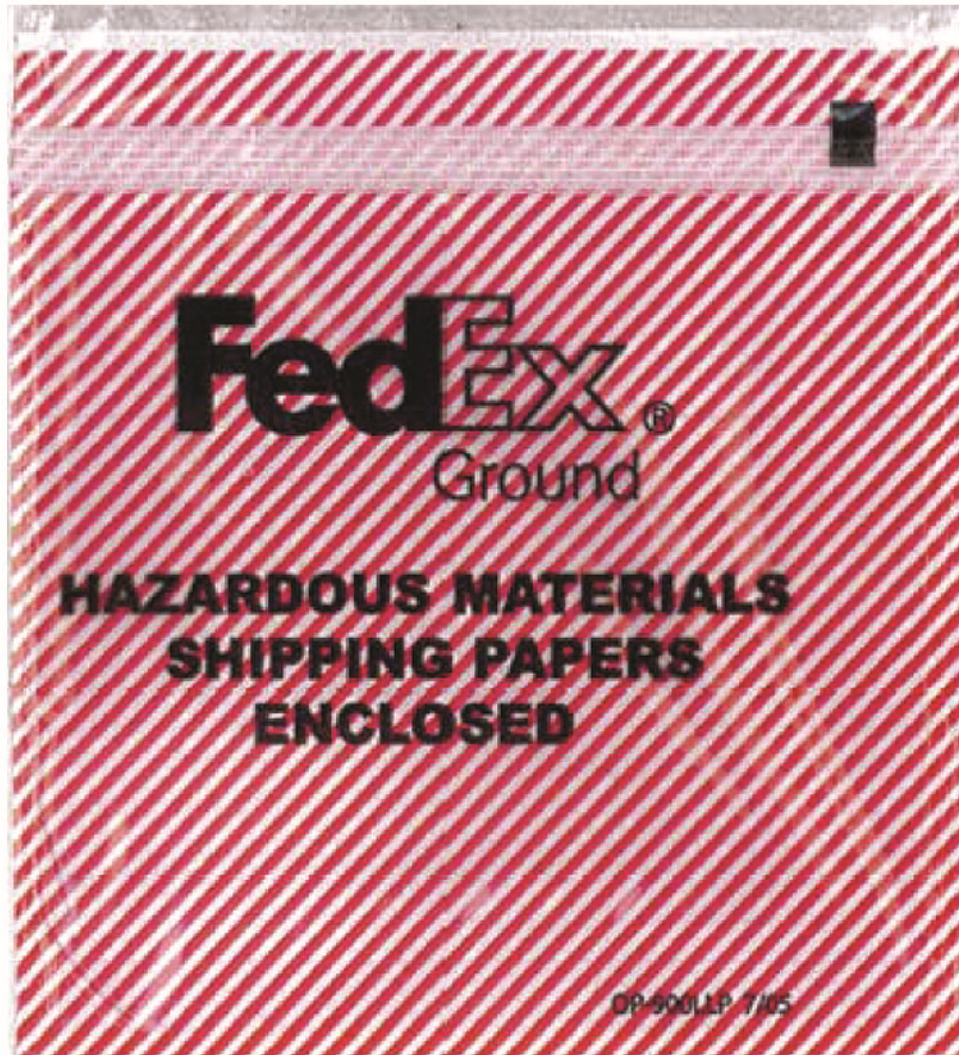


- Insert 4 labels from the bottom of the Hazardous Materials Certification Form.
- Attach the pouch to the bottom to the inflator return box.



TP130387

## FedEx Ground Package Return Program (PRP) Label.

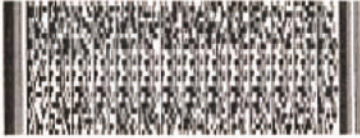- Fill in the "From" information; (Nissan/Infiniti dealer name and address). The RMA# is not needed.
- Peel off the label and affix it to the top of the box to the left of the Class 9 label. Use the scribe marks on the box as a guide so the PRP label does not touch any portion of the Class 9 label or its border.

<p><b>FedEx® Ground Package Returns Program (PRP)</b></p> <p><u>Preparing PRP Packages</u></p> <ul style="list-style-type: none"> <li>• Pack items in a sturdy box using cushioning materials to keep them secure. Refer to packaging instructions if provided.</li> <li>• Remove or black out any old shipping labels, including the original shipping barcode.</li> <li>• Seal the box with shipping tape.</li> <li>• Complete the FROM section.</li> <li>• Affix one PRP label to each box. (If you do not have enough labels, you must obtain additional labels from the company that provided them.)</li> <li>• Keep the back of the label as your receipt. You may have your FedEx Ground driver sign below.</li> <li>• Affix the completed Hazardous Material Shipping Paper to the top of the package.</li> <li>• Provide the completed and signed Hazardous Material Certification Form to your FedEx Ground driver.</li> </ul> <p><u>Options To Return PRP Packages</u></p> <p><b>Pick Up*</b></p> <ul style="list-style-type: none"> <li>• Log on to FedEx.com and select the "Pickup" tab. Then choose "FedEx Ground Package Returns Program." (Bookmark this page if you have frequent returns.)</li> <li>• Call (888)777-6040 to schedule a commercial pickup from your business location.</li> <li>• If you receive regular pickups, give the package to your FedEx® Ground Driver.</li> </ul> <p><small>* If you did not receive all of the proper paperwork (packaging, shipping instructions, shipping papers, and certification forms), please contact the company that provided the label. The FedEx Ground driver cannot pickup any hazardous materials that are not properly prepared for transportation.</small></p> <hr/> <p style="text-align: center;"><b>PICKUP RECEIPT</b></p> <p>Package returning to: _____</p> <p>Driver Signature: _____ Date: _____</p>	<table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"><small>Shipper Receipt</small></td> <td style="text-align: center;"><small>Receipt</small></td> <td style="text-align: center;"><small>Shipper Number</small></td> </tr> <tr> <td style="text-align: center;">7154379 09051744</td> <td style="text-align: center;">7154379 09051744</td> <td style="text-align: center;">7154379</td> </tr> </table> <div style="border: 1px solid black; padding: 5px; margin-top: 5px;"> <p style="text-align: center; background-color: #c00; color: white; margin: 0;"><b>FedEx Ground® Package Returns Program</b></p> <p style="margin: 0;">From: _____</p> <p style="margin: 0;">Address: _____</p> <p style="margin: 0;">City: _____ State/Prov: _____</p> <p style="margin: 0;">ZIP/Postal: _____ RMA# _____</p> </div> <div style="background-color: #c00; color: white; text-align: center; padding: 5px; margin-top: 5px;"> <p style="margin: 0;"><b>Turn Over for Instructions</b></p> <p style="margin: 0; font-size: 1.2em;"><b>HAZMAT</b></p> </div> <p style="margin-top: 10px;"><b>Ship To:</b> TK HOLDINGS INC 2025 HARMON ROAD AUBURN HILLS MI 48326</p> <div style="text-align: center; margin-top: 10px;">   </div> <div style="text-align: center; margin-top: 20px;">  <p style="margin: 5px 0;">(9612300) 7154379 09051744</p> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin-top: 5px;"> <p style="margin: 0;">15 digit tracking ID</p> </div> </div>	<small>Shipper Receipt</small>	<small>Receipt</small>	<small>Shipper Number</small>	7154379 09051744	7154379 09051744	7154379
<small>Shipper Receipt</small>	<small>Receipt</small>	<small>Shipper Number</small>					
7154379 09051744	7154379 09051744	7154379					

TP130390

# Hazardous Materials Certification / OP-900PRP Form (Labels)

Fill in the pick-up location (Nissan/Infiniti dealer name and address) and Chemtrec Contact Number (CCN) on the FedEx Copy and Customer Copy. Each dealer's specific CCN number can be found on NNAnet.com under My Documents in three locations: 1) Sales > Campaigns, 2) Parts > Campaigns, 3) Service > Campaigns.

## EXAMPLE

TP130388

Apply to box

FedEx

Customer

Put these 4 labels in the pouch

Package Return Program – Hazardous Materials Certification					
Number and Type Packaging			UNID	DOT Shipping Name of Material	Haz Class/Packing Group
1 Fiberboard Box			UN3268	Air bag inflator	Class 9 III
Weight			Label Type/Other information		
5 lbs.			Class 9 EX#2001030034		

Package Return Program – Hazardous Materials Certification					
Pick Up Location Company Address City, State ZIP CCN#			Approved PRP Shipper Name Account # Emergency Contact Number Tracking ID		
TK Holdings 7154379 1-800-424-9300			TK Holdings CCN21726 7154379 1-800-424-9300		
Number and Type Packaging			UNID	DOT Shipping Name of Material	Haz Class/Packing Group
1 Fiberboard Box			UN3268	Air bag inflator	Class 9 III
Weight			Label Type/Other information		
5 lbs.			Class 9 EX#2001030034		
This is to certify that the above-named materials are properly classified described, packaged, marked and labeled and are in proper condition for transportation according to the applicable regulations of the Department of Transportation. Signature: <u>Harry Glen Pardon</u> Date: _____					

Package Return Program – Hazardous Materials Certification					
Pick Up Location Company Address City, State ZIP CCN#			Approved PRP Shipper Name Account # Emergency Contact Number Tracking ID		
TK Holdings 7154379 1-800-424-9300			TK Holdings CCN21726 7154379 1-800-424-9300		
Number and Type Packaging			UNID	DOT Shipping Name of Material	Haz Class/Packing Group
1 Fiberboard Box			UN3268	Air bag inflator	Class 9 III
Weight			Label Type/Other information		
5 lbs.			Class 9 EX#2001030034		
This is to certify that the above-named materials are properly classified described, packaged, marked and labeled and are in proper condition for transportation according to the applicable regulations of the Department of Transportation. Signature: <u>Harry Glen Pardon</u> Date: _____					

Account Number	Emergency Contact Number	Shipper Name
7154379	1-800-424-9300	TK Holdings CCN21726
Hazardous Materials Description and Quantity		
1 Fiberboard Box UN3268, Air bag inflator, Class 9, III, 5 lbs. Class 9 EX#2001030034		


  

Account Number	Emergency Contact Number	Shipper Name
7154379	1-800-424-9300	TK Holdings CCN21726
Hazardous Materials Description and Quantity		
1 Fiberboard Box UN3268, Air bag inflator, Class 9, III, 5 lbs. Class 9 EX#2001030034		

## Top of Inflator Shipping Box and Form



## Bottom of Inflator Shipping Box

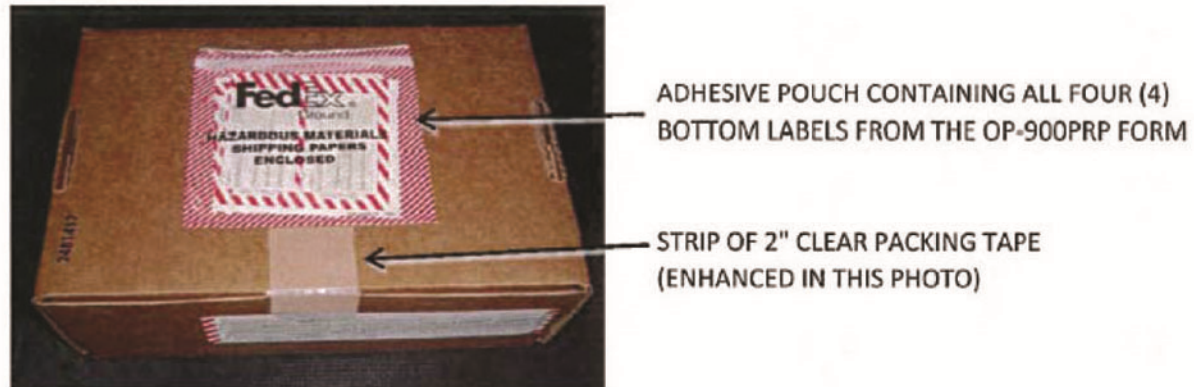

If any of the packaging is damaged, or if you have any questions, please contact Miguel Prigadaa:

By phone at 210-250-5078; 8:30 am to 5:00 pm EST, Monday through Friday.

or

By email: [MLGTakataRestraints\\_International@menlowworldwide.com](mailto:MLGTakataRestraints_International@menlowworldwide.com)

TP130391

## **OWNER'S LETTER (typical owner's letter)**

Dear Infiniti I35 Owner:

This notice is sent to you in accordance with the requirements of the National Traffic and Motor Vehicle Safety Act. Infiniti has decided that a defect which relates to motor vehicle safety exists in certain 2004 Model year Infiniti I35. Our records, which are based primarily on state registration and title data, indicate that you own or lease the Infiniti vehicle identified by the VIN on the inside of this notice that was previously or is currently registered in Florida and adjacent counties in Southern Georgia; Hawaii; Guam; Puerto Rico; Saipan; American Samoa; U.S. Virgin Islands; as well as coastal areas of Alabama, Louisiana, Mississippi, and Texas.

### **Reason for Recall**

In certain vehicles equipped with a front passenger air bag assembly, continued exposure to areas with high levels of absolute humidity may cause the front passenger air bag inflator housing to rupture and deploy abnormally if the vehicle is involved in a crash where the front passenger air bag is designed to deploy. If this occurs, it may increase the risk of an injury to the front seat occupants.

### **What Infiniti Will Do**

Your Infiniti retailer will replace the potentially affected front passenger air bag inflator with a new one. This free service should take less than 2 hours to complete, but your Infiniti retailer may require your vehicle for a longer period of time based upon their work schedule. Infiniti believes that sufficient parts are available for the repair. However, in the event that parts are not available, Infiniti will provide a loaner vehicle at no cost until the repair can be completed.

### **What You Should Do**

Infiniti strongly recommends that you have this safety recall repair performed immediately. Please contact your Infiniti retailer to schedule an appointment. In the interim do not allow passengers to ride in the passenger seat. Please bring this notice with you when you keep your service appointment. Instructions have been sent to your Infiniti retailer.

If you have questions or concerns about this recall, you may contact the National Consumer Affairs Department, Infiniti Division, Nissan North America, Inc., P.O. Box 685003, Franklin, TN 37068-5003. The toll free number is 1-800-662-6200.

If you are still unsatisfied after contacting your retailer and the Infiniti Consumer Affairs Department, you may submit a complaint to the Administrator, National Highway Traffic Safety Administration, 1200 New Jersey Avenue, SE., Washington, DC 20590; or call the toll-free Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153); or go to <http://www.safercar.gov>.

Federal law requires that any vehicle lessor receiving this recall notice must forward a copy of this notice to the lessee within ten days.

Thank you for your cooperation. We are indeed sorry for any inconvenience this may cause you.