



RECALL CAMPAIGN BULLETIN

Reference:

NTB18-022

Date:

March 8, 2018

VOLUNTARY SAFETY RECALL CAMPAIGN 2011 - 2012 JUKE FUEL PRESSURE SENSOR

CAMPAIGN ID #: PC618

APPLIED VEHICLES: 2011 – 2012 Juke (F15)

Check Service COMM or Dealer Business Systems (DBS) National Service History to confirm campaign eligibility.

- There are two bulletins with different campaign ID numbers for Juke Fuel Pressure Sensor.
- Each bulletin is applicable to specific vehicles.
- Make sure the correct bulletin (Campaign ID #) is being used.

INTRODUCTION

Nissan is conducting a Voluntary Safety Recall Campaign on certain specific Model Year 2011 - 2012 Juke vehicles to re-torque the fuel rail pressure sensor. This service will be performed at no charge for parts or labor.

IDENTIFICATION NUMBER

Nissan has assigned identification number PC618 to this campaign. This number must appear on all communications and documentation of any nature dealing with this campaign.

DEALER RESPONSIBILITY

It is the dealer's responsibility to check Service COMM or Dealer Business Systems (DBS) National Service History for the campaign status on each vehicle. This includes vehicles purchased from private parties or presented by transient (tourist) owners and vehicles in a dealer's inventory. **Federal law requires that new vehicles in dealer inventory which are the subject of a safety recall must be corrected prior to sale. Failure to do so can result in civil penalties by the National Highway Traffic Safety Administration.** While federal law applies only to new vehicles, Nissan strongly encourages dealers to correct any used vehicles in their inventory before they are retailed.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

REQUIRED SPECIAL TOOL J-51813

- Additional tools can be ordered from TECH-MATE at 1-800-662-2001.



Figure A

SERVICE PROCEDURE

WARNING: Some steps in this Service Procedure require touching engine parts that may be hot. The engine and related components should be cool enough to prevent a burn before performing steps that require contact with hot parts.

1. Raise the vehicle.

2. Remove 3 bolts or clips, shown in Figure 1, from the lower front fascia.

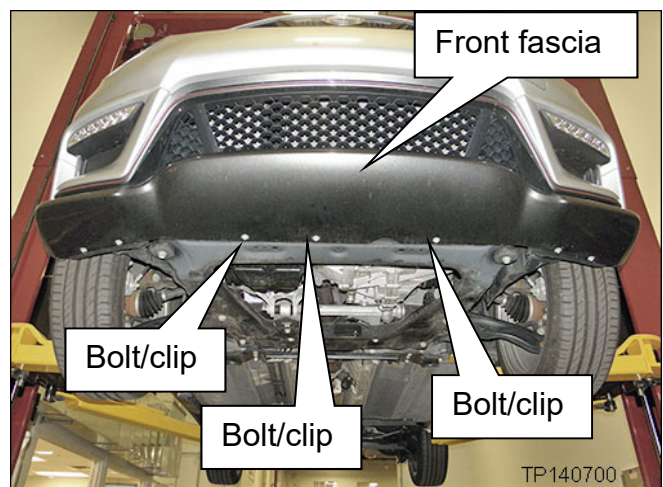


Figure 1

3. Disconnect the lower radiator hose/tube from the mounting bracket shown in Figure 2.
 - Use a small flat blade screwdriver to push down and release the tab at the top of the bracket.

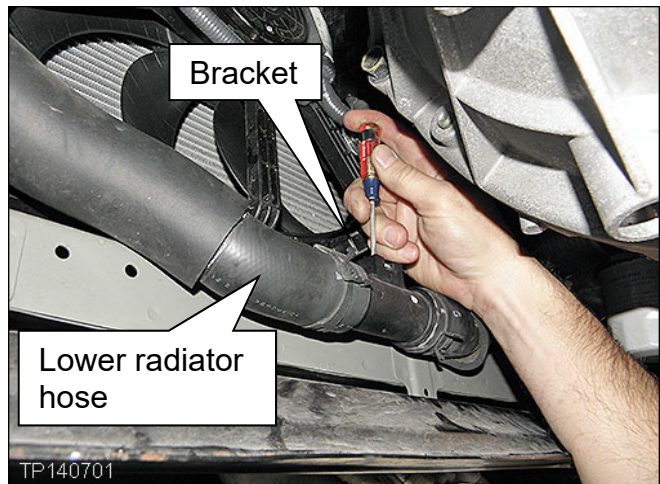


Figure 2

4. Position rolled up rags between the lower radiator hose and the lower radiator core support as shown in Figure 3.
 - This will hold the radiator hose a few inches away from the lower core support giving a line-of-sight to the fuel rail pressure sensor.
5. Position rolled up rags between the lower front fascia and the sub-frame as shown in Figure 3.
 - This will hold the fascia a few inches away from the sub-frame giving a line-of-sight to the fuel rail pressure sensor.

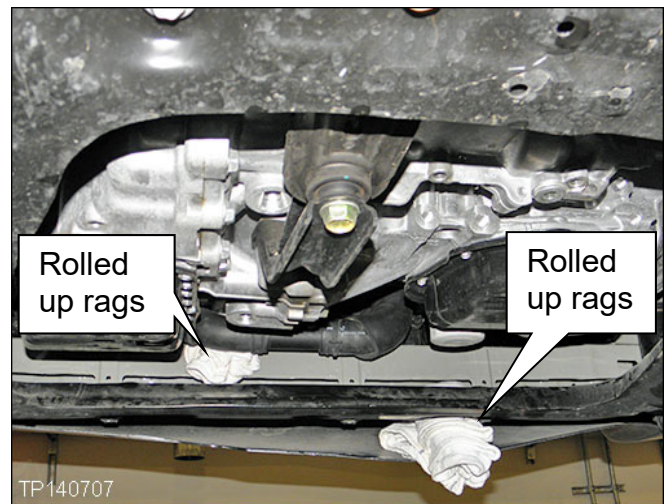


Figure 3

6. Look up between the lower core support and the sub-frame.
 - As you look up toward the intake manifold you will see the fuel rail pressure sensor as shown in Figure 5 on the next page.
 - Use lighting as needed.



Figure 4

7. Locate the fuel rail pressure sensor shown in Figure 5.

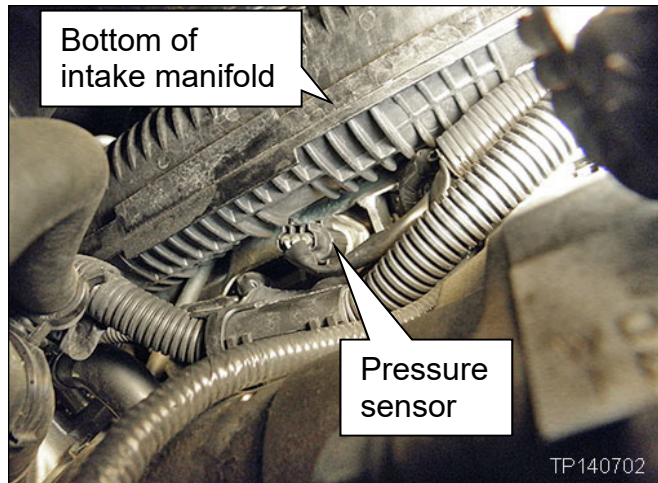


Figure 5

8. Prepare special tool J-51813 as shown in Figure 6:

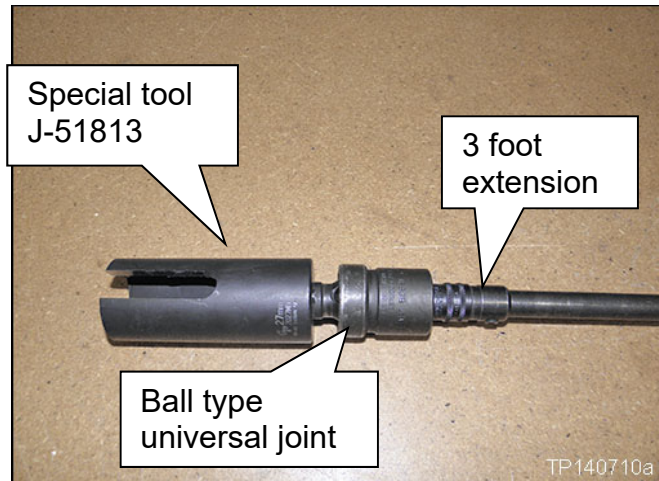


Figure 6

9. Position special tool J-51813 on the fuel rail pressure sensor as follows:
 - a. Look up between the core support and the sub-frame.
 - b. Slide the extension with special tool J-51813 between the engine and the radiator.
 - c. Using the extension; guide special tool J-51813 onto the sensor.

NOTE: The slot in the side of special tool J-51813 must be positioned to accommodate the sensor harness.



Figure 7

10. Attach a torque wrench to the end of the extension.

11. Torque the pressure sensor as follows:

- a. Make sure special tool J-51813 is completely fitted onto the sensor.
- b. Keep light pressure (push lightly) to keep special tool J-51813 fitted on the sensor while performing the torque.

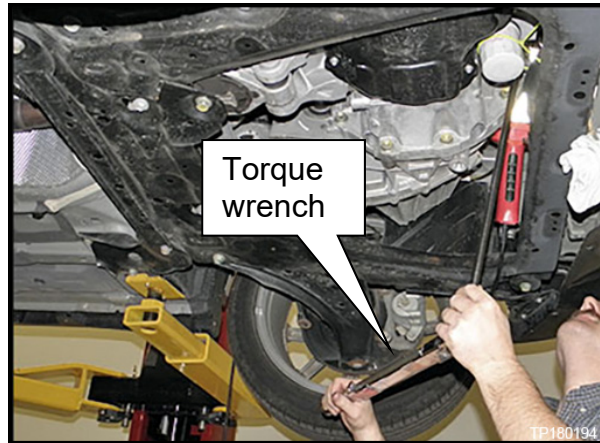


Figure 8

- If special tool J-51813 is not completely fitted on the sensor, the correct torque may not be applied.
- Use steady constant pressure when torquing the sensor. Pushing too hard may cause excessive angle of the universal joint, creating a poor fit of special tool J-51813 on the sensor.

c. Torque to 50 N•m (5.1 kg-m, 37 ft-lb).

12. Remove the rolled up rags:

- Remove rags from between the lower front fascia and the sub-frame.
- Remove rags from between lower radiator hose and the lower radiator core support.

13. Reinstall the lower radiator hose/tube onto the mounting bracket.

END

CLAIMS INFORMATION

Submit a Campaign (CM) line claim using the following claims coding:

CAMPAIGN (CM) ID #	DESCRIPTION	OP CODE	FRT
PC618	Re-torque fuel pressure sensor	PC6180	0.4 Hrs.