

Safety Recall: 2016–20 MDX Connecting Rod Bearing

Supersedes 24-001, dated February 21, 2024, to revise the information.

AFFECTED VEHICLES

Year	Model	Trim	VIN Range
2016–20	MDX	ALL	Check iN VIN status inquiry for eligibility

REVISION SUMMARY

This service bulletin has been revised extensively; American Honda recommends reading this bulletin in its entirety.

BACKGROUND

On November 9th, 2023, Acura announced a **STOP SALE** and **safety recall** for a certain number of 2016–20 MDX units. These vehicles may have engines containing internal damage at the connecting rod bearings, possibly leading to engine failure. If an engine fails, the vehicle may lose motive power, increasing the risk of crash, fire and resulting injury.

During engine manufacturing, some crankshafts may have been built with improper connecting rod journal dimensions, resulting in increased friction between the journals and their bearings. This increased friction could lead to accelerated engine deterioration and possible failure due to a lack of lubrication and excessive heat.

If this bulletin appears during an iN VIN status inquiry, the vehicle is subject to a **safety recall**. Any affected vehicles in your dealer inventory are on **STOP SALE** until further notice. Refrain from calling Tech Line for updates.

CLIENT INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by “do-it-yourselfers,” and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Acura automobile dealer.

CLIENT NOTIFICATION

Owners of the affected vehicles have been sent a notification of this campaign. They were informed that due to a limited supply of parts (at this time) Acura is prioritizing the repair of client vehicles experiencing symptoms related to this recall.

When **adequate replacement parts** become available, Acura will send a follow-up letter to clients instructing them to schedule an appointment for all vehicles affected by this recall. If a client experiences the known symptoms associated with this **safety recall** (see CORRECTIVE ACTION), they are instructed to contact their local Acura dealer for the repair.

For any questions or concerns clients may have, you may have them contact American Honda's Customer Support & Campaign Center at **1-888-234-2138**.

The following suggested text should be included on any repair order for an already sold affected vehicle that comes in for service. This information should be printed out completely any time service is conducted on an affected vehicle, and the recall repair has not yet been completed. Depending on parts availability, the normal procedures under the *Dealer Operations Manual* (DOM) 7.2.1 will apply for this recall.

Suggested Verbiage to be Included on the Repair Order

Client was advised that:

The vehicle is subject to a recall affecting the connecting rod bearings. The parts necessary to complete the recall repair are currently limited. Vehicles with eligible VINs and the following symptom: an abnormal engine knocking noise or an abnormal engine knocking noise followed by a loss of power are eligible for immediate inspection. Once parts repair kits are available, if the vehicle has not been repaired, the registered owner of the vehicle will receive a notice to bring the vehicle in for a repair, regardless of symptom.

IMPORTANT NOTICE

Due to a limited parts inventory to complete the necessary repairs, dealers must prioritize which vehicles are inspected and repaired. A client experiencing a symptom of an engine rod knock or a vehicle stall when driving should be inspected. Otherwise, advise the client that parts are limited as described in the CLIENT NOTIFICATION section.

The self-study training module, *ENC65 Multiple Connecting Rod Repair with V-SMART*, is available on the Online University. Make sure to complete the module before starting the inspection procedure.

CORRECTIVE ACTION

Do an iN **VIN** status inquiry to make sure the vehicle is shown as eligible for an inspection. Removal of the connecting rod bearings and taking/sending photos via V-SMART for inspection by the Bearing Inspection Inquiry Team.

The technician will then create a Bearing Inspection Inquiry through iN and will receive a (reference case number). This number must be used when contacting the Bearing Inspection Inquiry Team. This team will conduct a judgment and recommend the appropriate repair for the technician to complete.

In the event that parts are not available, the **STOP SALE** remains in effect for that vehicle. To see if a vehicle in inventory is affected by this safety recall, do a **VIN** status inquiry before selling it. Some vehicles affected by this campaign may be in your new or used vehicle inventory.

PARTS INFORMATION

Repair parts will be automatically allocated based on repair direction. Carefully review the **Repair Type** instructions emailed *after* submission of the inspection results to the Bearing Inspection Inquiry team.

REQUIRED MATERIALS

Part Name	Part Number	Quantity
0-20 Full Synthetic Motor Oil	-	5.4 US qt
Hondabond HT Silicone Gasket	08718-0004	1

TOOL INFORMATION

Tool Name	Part Number	Quantity
V-SMART Phone	CDW5001003PK	1
Crank Angle Gauge, [GAUGE, CRANK ANGLE]	07AAJ-5G0A100	1
M8 Rod Holder, [HOLDER, M8 ROD]	07AAB-5G0A100	1
Piston Stopper, [STOPPER, PISTON]	07AAB-5G0A200	4 per vehicle
Bearing Photo Box, [BOX, BEARING PHOTO]	07AAK-5J2A200	1
Large Zip Tie	Commercially Available	2
9AT Protecting Cap	07AAK-5J4A100	1
Lift Table	KLS6227500	1
Load Leveler	NR178115H	1
Engine Hanger	VSB02C00041	1

NOTE: These tools have been auto-shipped to your dealer. There is no need to order at this time as quantities are limited. Contact the Special Tools Hotline **(833) 949-4672** and/or email special_tools@ahm.honda.com for information.

WARRANTY CLAIM INFORMATION

Important Notice: Warranty claim information extends across multiple pages; please select the correct table.

Connecting Rod Bearing Repair

INSPECTION A, plus repair

NOTE:

- For inspections that resulted in a repair, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Both repair lines must be done for completion of **this claim**.
- Enter the bearing part number(s) (provided by the Bearing Inquiry Team) under templates D.

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
1115G5	Inspection A- connecting rod bearings (includes photos)	1.7 hr	6JA00	THS00	A24001A	13010-R9P-A00
1111ER	Replace connecting rod bearings (includes photos)	2.3 hr	6KC00	OH600	A24001D	13321-5J6-A01

INSPECTION B, plus repair

NOTE:

- For inspections that resulted in a repair, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Both repair lines must be done for completion of **this claim**.
- Enter the bearing part number(s) (provided by the Bearing Inquiry Team) under templates E.

1115G6	Inspection B – connecting rod bearings and main cap bearing (includes photos)	2.7 hr	6JA00	THS00	A24001B	13050-R9P-A00
1111FM	Replace connecting rod bearings (includes photos)	2.3 hr	6KC00	OH600	A24001E	13341-R9P-A01

VIN and Engine Number Identification Query through V-SMART–No Repair

NOTE:

- No further warranty claim required; vehicle is considered fixed by engine number verification.
- Use only this labor operation if the engine number identification query through V-SMART was done and resulted in “*Engine Not Affected.*”
- Do not use this warranty table for either Inspection A or Inspection B.
- The Bearing Inspection Inquiry Team **must still** be contacted to complete a claim; See step 13 of the V- SMART ENGINE NUMBER VERIFICATION section for more details.

1115G2	Inspect VIN/EIN Engine not affected (Includes contacting the Bearing Inspection Inquiry Team)	0.3 hr	6KC00	OH600	B24001C	11200-5J6-A11
--------	---	--------	-------	-------	---------	---------------

For repair method other than Connecting Rod Bearing replacement, the repair must be matched with the appropriate inspection and repair template to process the warranty claim.

INSPECTION A or B

NOTE:

- For inspections that resulted in a repair, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Both repair lines must be done for completion of **this claim**.

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
1115G5	Inspection A- connecting rod bearings (includes photos)	1.7 hr	6JA00	THS00	B24001A	13010-R9P-A00
1115G6	Inspection B – connecting rod bearings and main cap bearing (includes photos)	2.7 hr	6JA00	THS00	B24001B	13050-R9P-A00

Crankshaft Replacement

NOTE:

- For inspections that resulted in other than a connecting rod replacement, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Based on the Bearing Inquiry Team’s recommended repair, select the appropriate repair template below.
- Both repair lines must be done for completion of **this claim**.

FWD

1111EY	Replace crankshaft (includes alignment)	8.2 hr	6KC00	OH600	B24001F	13322-5J6-A01
--------	---	--------	-------	-------	---------	---------------

AWD

1111EY	Replace crankshaft (includes alignment)	8.3 hr	6KC00	OH600	B24001G	13322-5J6-A01
--------	---	--------	-------	-------	---------	---------------

AWD with ATF Cooler

1111FC	Replace crankshaft with ATF Cooler (includes alignment)	8.7 hr	6KC00	OH600	B24001H	13212-R70-D01
--------	---	--------	-------	-------	---------	---------------

Crankshaft Replacement Including Oil Pump, Strainer, and Base

NOTE:

- For inspections that resulted in other than a connecting rod replacement, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Based on the Bearing Inquiry Team's recommended repair, select the appropriate repair template below.
- Both repair lines must be done for completion of **this claim**.

FWD

1111EZ	Replace crankshaft, pump, strainer, base (includes alignment)	8.2 hr	6KC00	OH600	B24001J	13323-5J6-A01
--------	---	--------	-------	-------	---------	---------------

AWD

1111EZ	Replace crankshaft, pump, strainer, base (includes alignment)	8.3 hr	6KC00	OH600	B24001K	13323-5J6-A01
--------	---	--------	-------	-------	---------	---------------

AWD with ATF Cooler

1111FD	Replace crankshaft, pump, strainer, base, with ATF Cooler (includes alignment)	8.7 hr	6KC00	OH600	B24001L	13213-R70-D01
--------	--	--------	-------	-------	---------	---------------

Long Block Replacement

NOTE:

- For inspections that resulted in other than a connecting rod replacement, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Based on the Bearing Inquiry Team's recommended repair, select the appropriate repair template below.
- Both repair lines must be done for completion of **this claim**.

FWD

1111FE	Replace long block (includes alignment)	10.1 hr	6KC00	OH600	B24001M	13324-5J6-A01
--------	---	---------	-------	-------	---------	---------------

AWD

1111FE	Replace long block (includes alignment)	10.2 hr	6KC00	OH600	B24001N	13324-5J6-A01
--------	---	---------	-------	-------	---------	---------------

AWD with ATF Cooler

1111FF	Replace long block, with ATF Cooler (includes alignment)	10.6 hr	6KC00	OH600	B24001P	13214-R70-D01
--------	--	---------	-------	-------	---------	---------------

Inspection Procedure for Complete Engine Failure

NOTE:

- For complete engine failure inspection, you will need to create **two repair lines** in the repair order- **one for inspection** and **one for repair**.
- Based on the Bearing Inquiry Team's recommended repair, **select inspection template Q** and appropriate repair template below.
- Both repair lines must be done for completion of **this claim**.

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
1115G7	Inspect for broken connecting rod only (includes photos)	0.5 hr	6JA00	THS00	B24001Q	11221-5G0-A00

FWD

1111FE	Replace long block (includes alignment)	10.1 hr	6KC00	OH600	B24001R	13324-5J6-A01
--------	---	---------	-------	-------	---------	---------------

AWD

1111FE	Replace long block (includes alignment)	10.2 hr	6KC00	OH600	B24001S	13324-5J6-A01
--------	---	---------	-------	-------	---------	---------------

AWD with ATF Cooler

1111FF	Replace long block, with ATF Cooler (includes alignment)	10.6 hr	6KC00	OH600	B24001T	13214-R70-D01
--------	--	---------	-------	-------	---------	---------------

Skill Level: Repair Technician

NOTE: Repair will require a special code that has been emailed by the Bearing Inspection Inquiry Team.

CONTENT REFERENCE

Important Notice

This information has been designed to work best when viewing through iN. It is strongly suggested (due to final page count and complexity) that the technician use iN to fully utilize this service bulletin's functions.

Furthermore, the technician is also advised to prepare their workstation for the tasks ahead. This includes: V-SMART phone fully charged, tools laid out, verify strong connection to Wi-Fi, and access to this service bulletin in its entirety via iN.

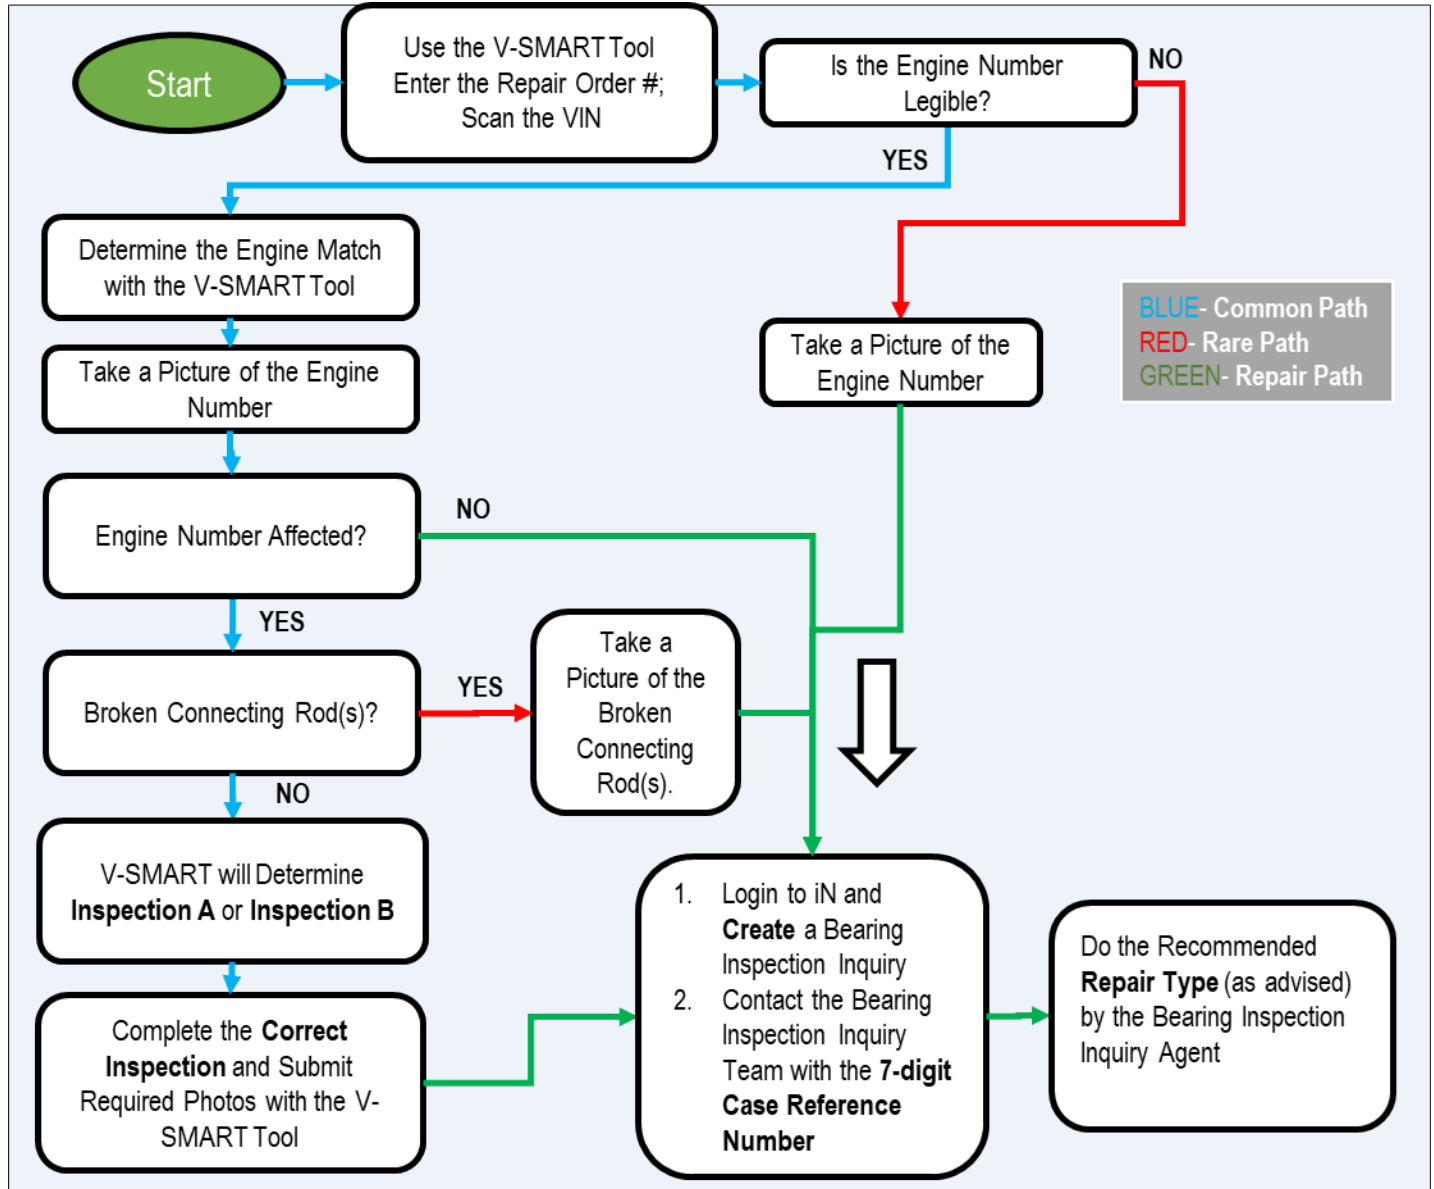



TABLE OF CONTENTS

V-SMART ENGINE NUMBER VERIFICATION	9
INSPECTION A	15
INSPECTION B	41
REPAIR #1 INSTALL RECOMMENDED BEARINGS	75
REPAIR #2 – LONG BLOCK REPLACEMENT	99
REPAIR #3 and #4 CRANKSHAFT REPLACEMENT	109
SUBFRAME INSTALLATION	122

V-SMART ENGINE NUMBER VERIFICATION

NOTE: DO NOT contact Tech Line for any inquiries to this safety recall. You must call the Bearing Inspection Inquiry Team at (800) 824-6632 (Select Option #9) for all inquiries and repair direction.

1. Remove the engine cover for better access to the engine number.

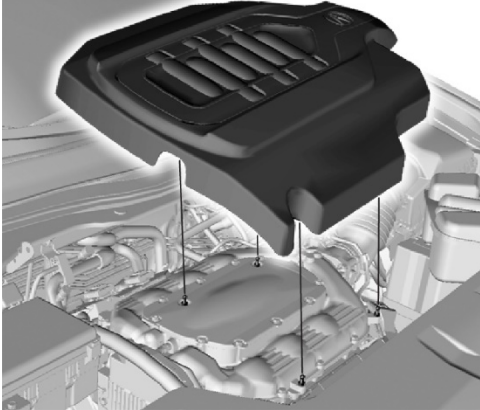

2. Log in to V-SMART application.

1. Dealer Number
2. User ID (iN login credentials)
3. Password (iN login credentials)



Dealer No

Username


Password

|||


○

<


3. Select **Engine Bearing** from the campaign selection.

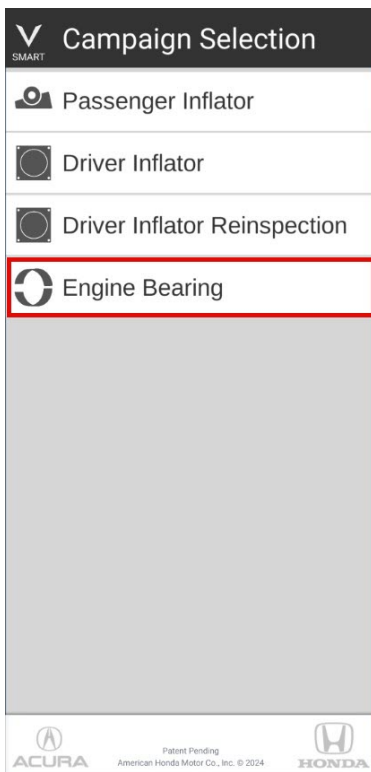

4. Enter the repair order number (RO#).

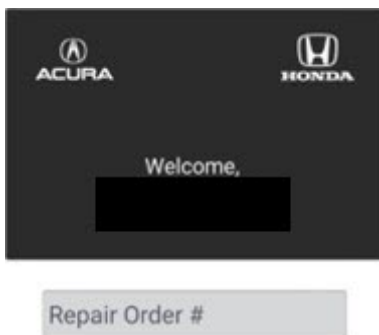


5. Scan the VIN on the driver's door jamb (the original engine identification number should appear).

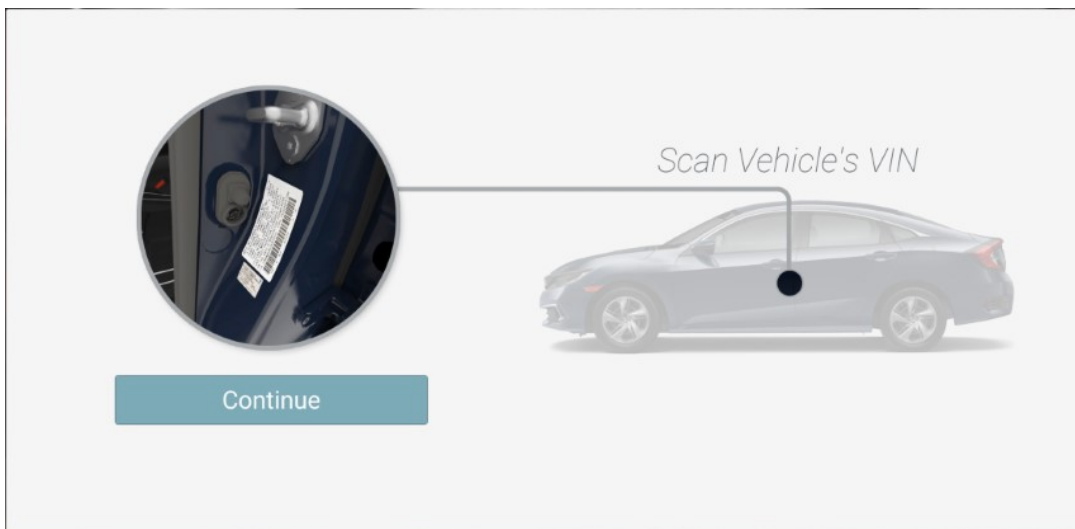

6. Locate the engine identification number.


NOTE: If the number is not legible, clean the surface.

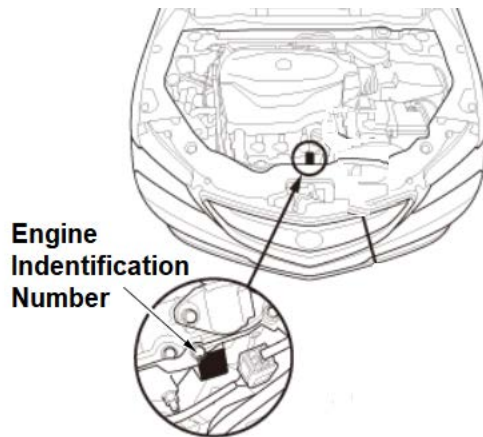

7. Verify that the engine number is legible.


- **Yes**—Press **YES** and continue to the next step.
- **No**—Press **NO** and you will be prompted to clean the area, then take a photo.

NOTE: If the engine number cannot be read after cleaning, proceed to step 13 as necessary for information on creating a Bearing Inspection Inquiry and contacting the Bearing Inspection Inquiry Team.

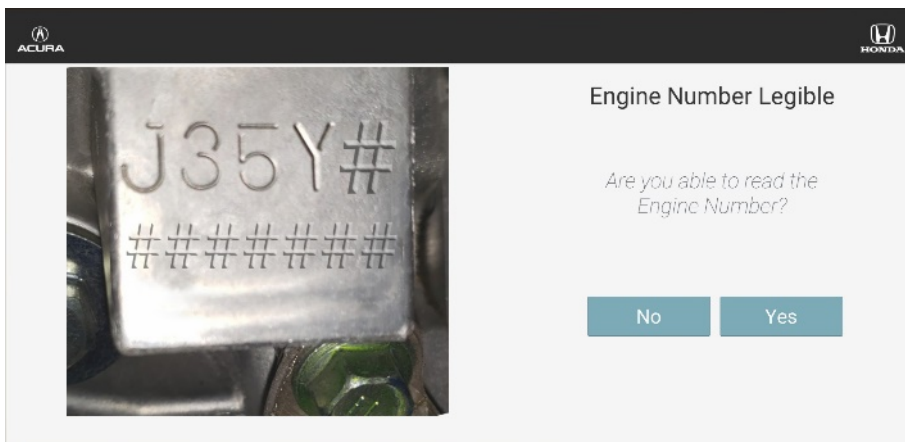

8. Does the engine number from the vehicle match the engine number on file?

- **Yes**-Press **YES**.

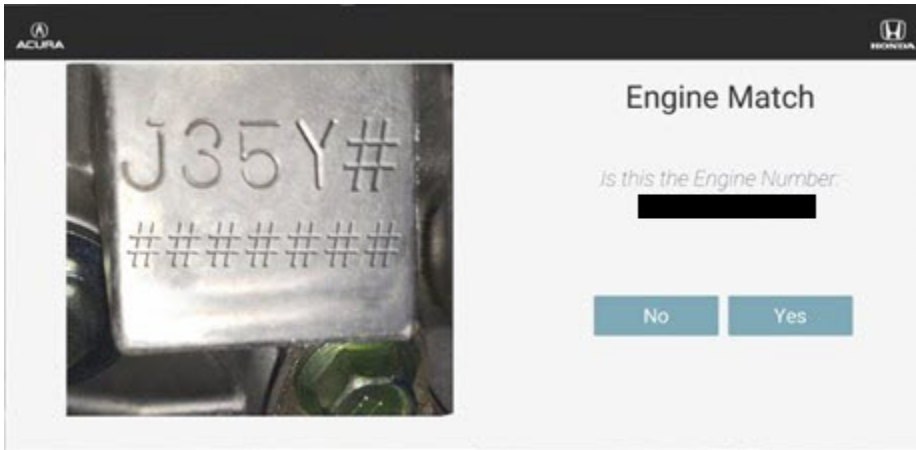

ACURA HONDA


Engine Match

Is this the Engine Number

██████████

No Yes

- **No**-Manually enter the 12-digit engine number into the application.
NOTE: Blank or incorrect numbers will not be accepted and rejected during the inquiry call.

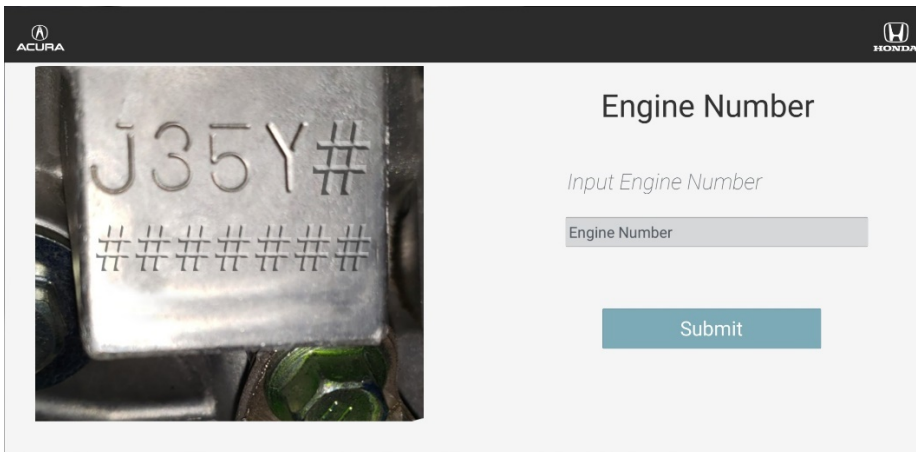

ACURA HONDA

Engine Number


Input Engine Number

Engine Number

Submit

9. Answer the V-SMART tool's question: *Are any connecting rods broken?*

- **Yes**-Follow the application's instructions.
NOTE: Proceed to step 13 as necessary for information on creating a Bearing Inspection Inquiry and contacting the Bearing Inspection Inquiry Team.
- **No**-Press **NO** and **continue** to the next step in this bulletin.

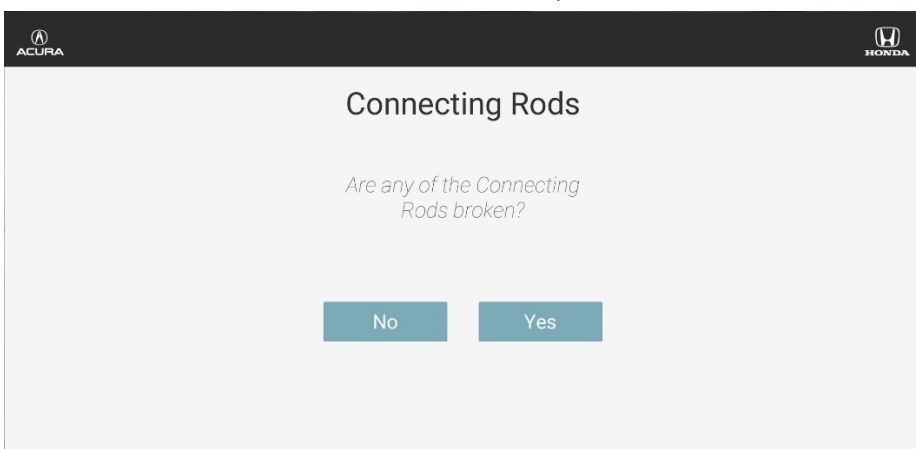

ACURA HONDA


Connecting Rods

Are any of the Connecting Rods broken?


No Yes

10. The V-SMART tool will direct you to either **INSPECTION A** or **INSPECTION B**. Follow the screen prompts and complete the correct inspection.

- **INSPECTION A:** V-SMART Database contains engine build information.

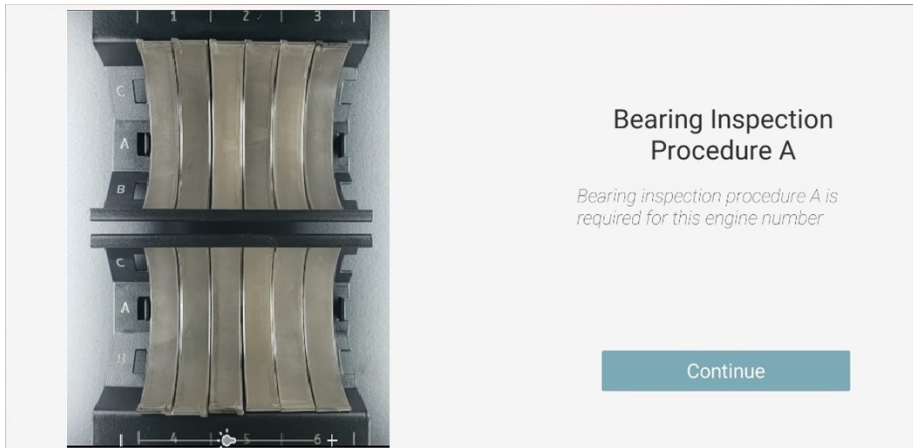

- **INSPECTION B:** V-SMART Database does not contain engine build information.

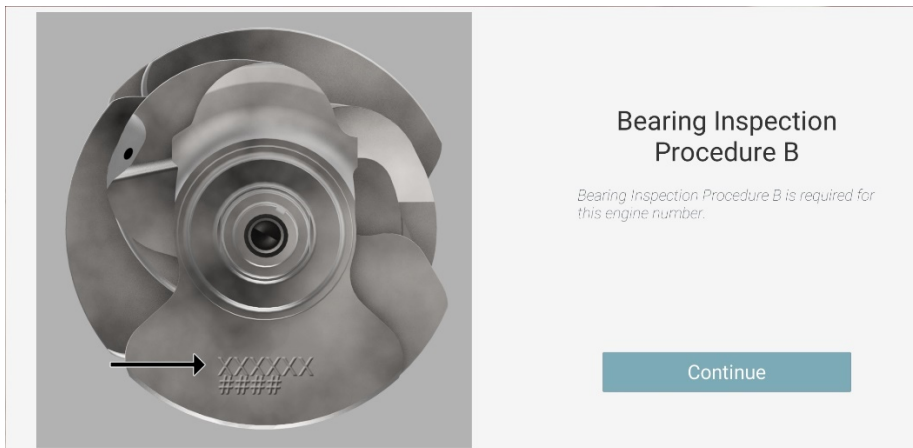

11. Sign out of the V-SMART application.

NOTE: DO NOT contact Tech Line for any inquires to this safety recall. You must call the Bearing Inspection Inquiry Team at (800) 824-6632 (Select Option #9) for all inquiries and repair direction.


12. Proceed to either **INSPECTION A** or **INSPECTION B**, as directed by the V-SMART application.

NOTE:


- Link to **INSPECTION A**, [\(Click HERE\)](#)
- Link to **INSPECTION B**, [\(Click HERE\)](#)
- Logging into the V-SMART application will always prompt the user to enter the RO# and scan/enter the VIN.
- V-SMART Troubleshooting Hotline Number: **800-346-6327**.

13. Create a Bearing Inspection Inquiry.

1. Log into iN.
2. Select **SERVICE > REMAN PARTS / SPECIAL ORDERS > BEARING INSPECTION INQUIRY**
3. Select the **BEARING INSPECTION INQUIRY**.
4. Input the correct **VIN**.

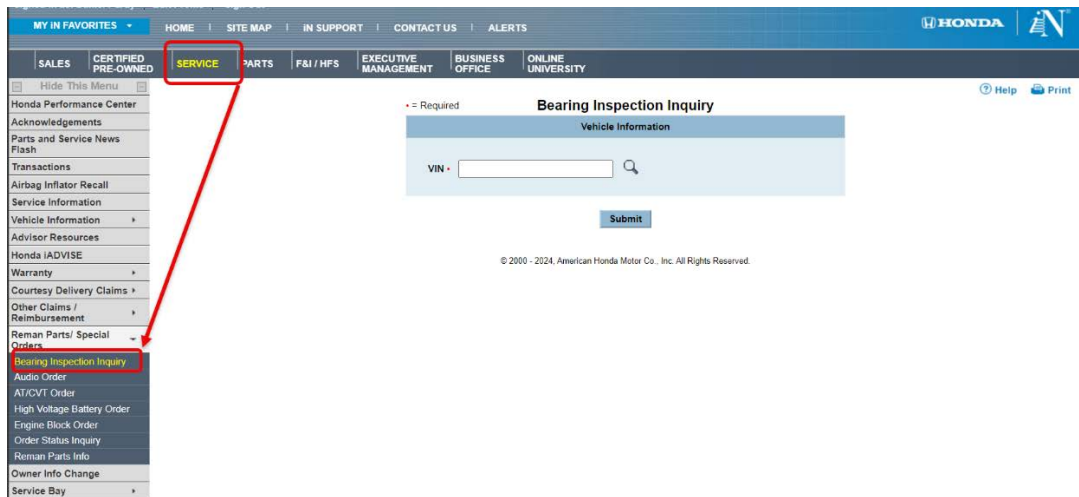

5. Input all vehicle information to create a case.

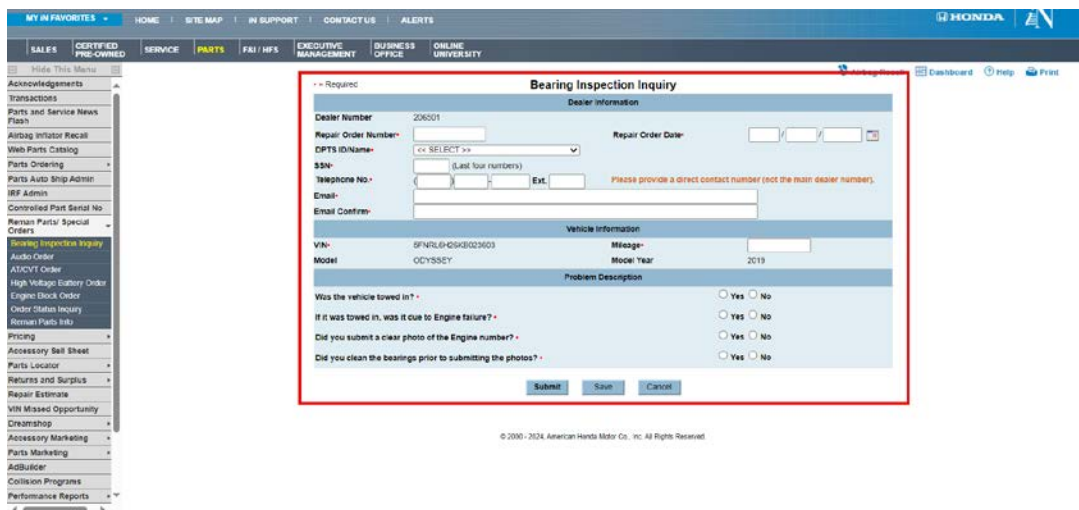

6. A 7-digit case reference number will be generated.

NOTE: Note this number on the RO for future reference.

7. Call the **Bearing Inspection Inquiry Team** at **(800) 824-6632**. Press **9** to be routed to the correct department (**do not contact TECH LINE for this**). Give the answering agent the **7-digit reference number** for a repair direction.

NOTE:

- MAKING THE INCORRECT SELECTION WILL RESULT IN INCREASED WAIT TIMES.
- **DO NOT** contact Tech Line for any inquires to this safety recall. You must call the **Bearing Inspection Inquiry Team** at **(800) 824-6632 (Select Option #9)** for all inquiries and repair direction.

8. The bearing inspection agent will give the **Repair Direction**. You will receive instructions via email on the repair method that includes the unique warranty code and the bearing sizes with their specific locations, if applicable. Parts will be shipped to your dealership. Make sure to advise the parts department with a copy of the RO.

NOTE: Link to CONTENT REFERENCE, ([Click HERE](#)).


INSPECTION A

NOTE: DO NOT contact Tech Line for any inquires to this safety recall. You must call the Bearing Inspection Inquiry Team at (800) 824-6632 (**Select Option #9**) for all inquiries and repair direction.

1. Turn the steering wheel all the way to the right.
2. Relieve the fuel pressure.

With the i-HDS:


- Connect an interface tool to the data link connector (DLC) located under the driver's side of the dashboard and launch i-HDS.

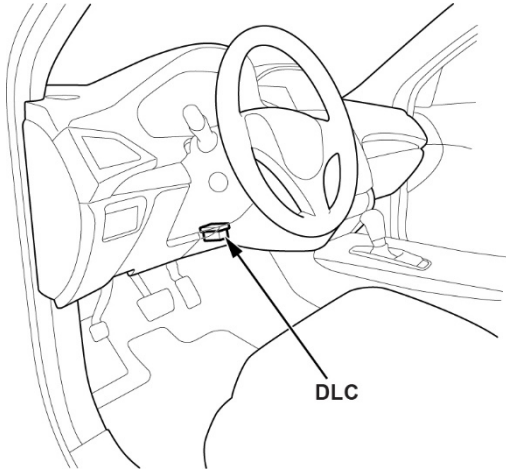

- Turn the vehicle to ON.
- Select the **PGM-FI** system on the i-HDS.
- Select **FUEL PUMP OFF** from the **Inspection Menu** and follow the on screen instructions.


Without the i-HDS:

1. Remove the PGM-FI main relay 2 from the under-dash fuse/relay box.

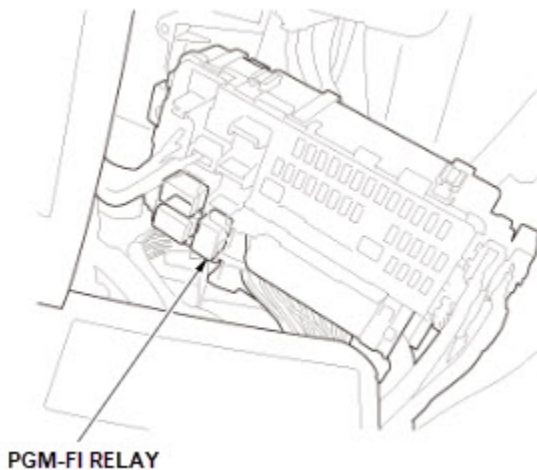


2. Start the engine and let it idle until it stalls.
3. Turn the vehicle to OFF.
4. Install the PGM-FI main relay 2.

3. Remove the front bulkhead cover.

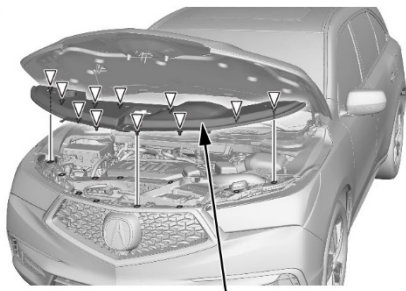


FRONT BULKHEAD COVER

4. Remove the air intake tube.

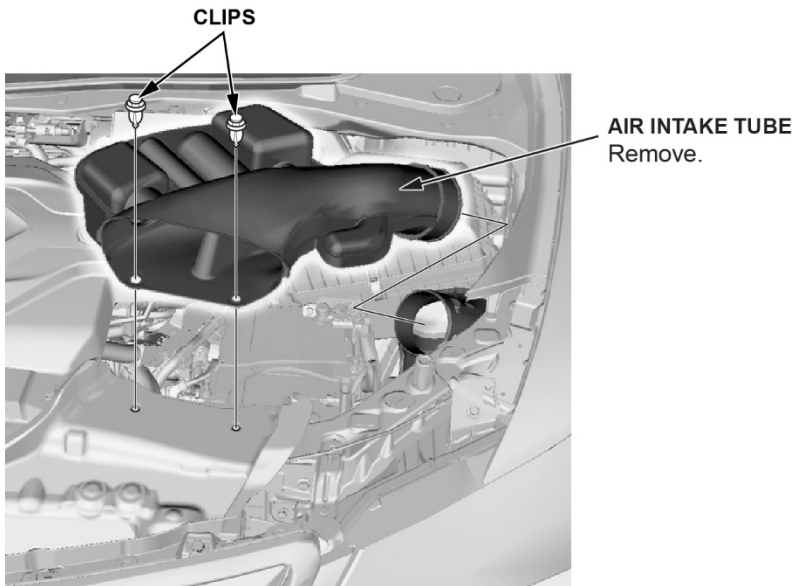


5. Disconnect the 12-volt battery.

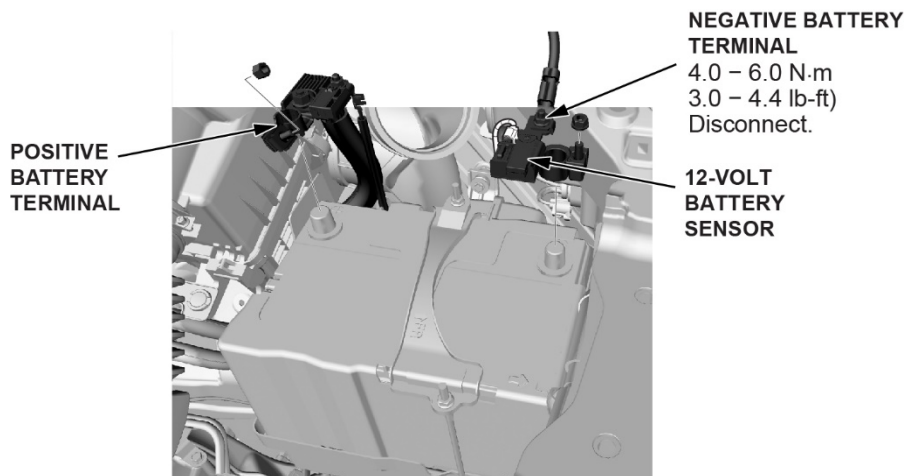

6. Remove the oil dipstick.


7. Set **cylinder #1** to top dead center (TDC). Align the pointer on the front upper cover with the No. 1 Piston TDC mark on the front camshaft pulley.

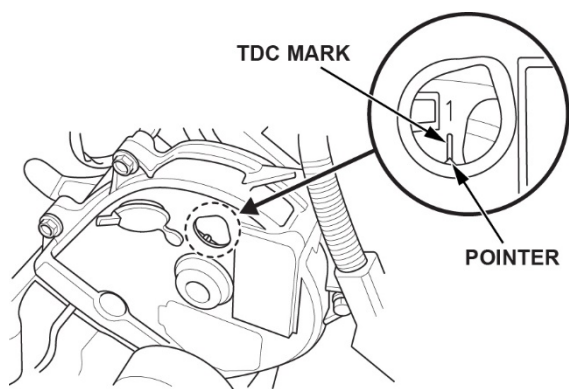

8. Disconnect and remove the coil packs.

FRONT


CONNECTOR

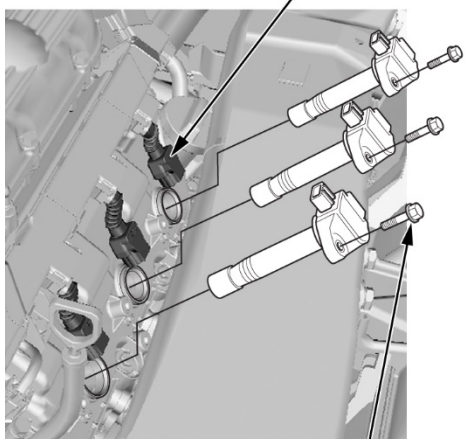

BOLTS
12 N.m
(9 lb-ft)

REAR


CONNECTOR

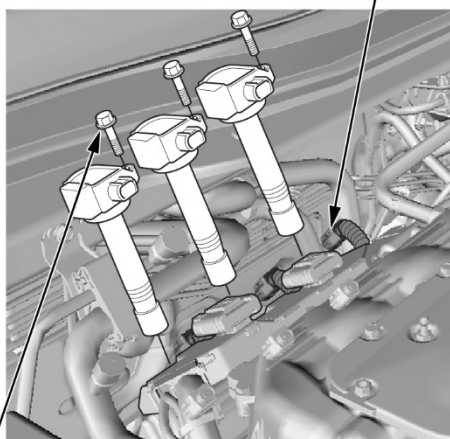

BOLTS
12 N.m
(9 lb-ft)


9. Remove the spark plugs.

FRONT

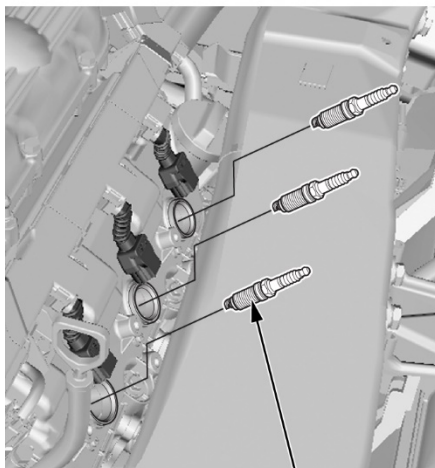

SPARK PLUGS
22 N.m (16 lb-ft)

REAR

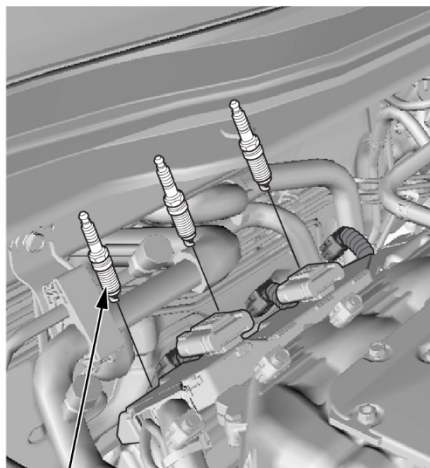


SPARK PLUGS
22 N.m (16 lb-ft)

10. Install the piston stoppers in **cylinders 2,3,4, & 6**.

NOTE: Hand tighten only.



Piston Stoppers
in cylinder #2 and #4.

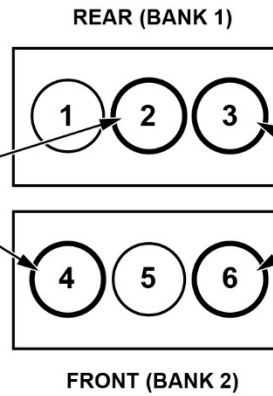


Piston Stoppers
in cylinder #3 and #6.

PISTON STOPPER
P/N 07AAB-5G0200




11. Raise the vehicle.

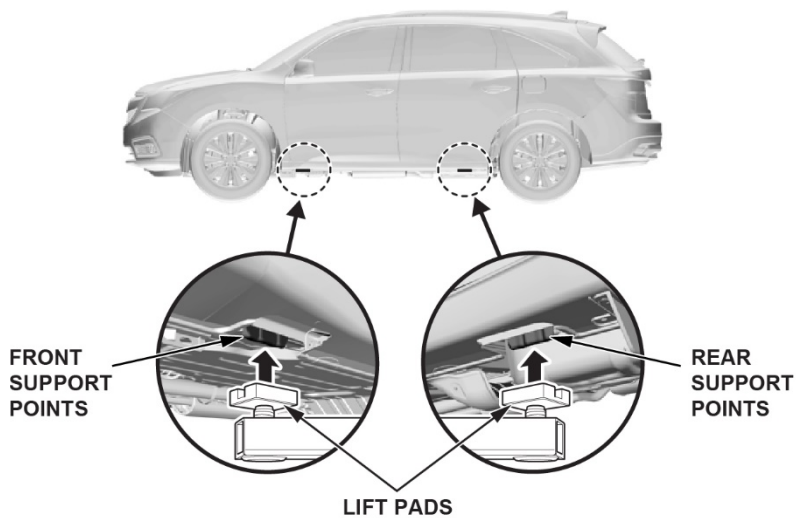


12. Remove the passenger side front wheel.


13. Pull back the passenger fender liner to gain access to the crankshaft pulley (the crankshaft pulley should be visible).

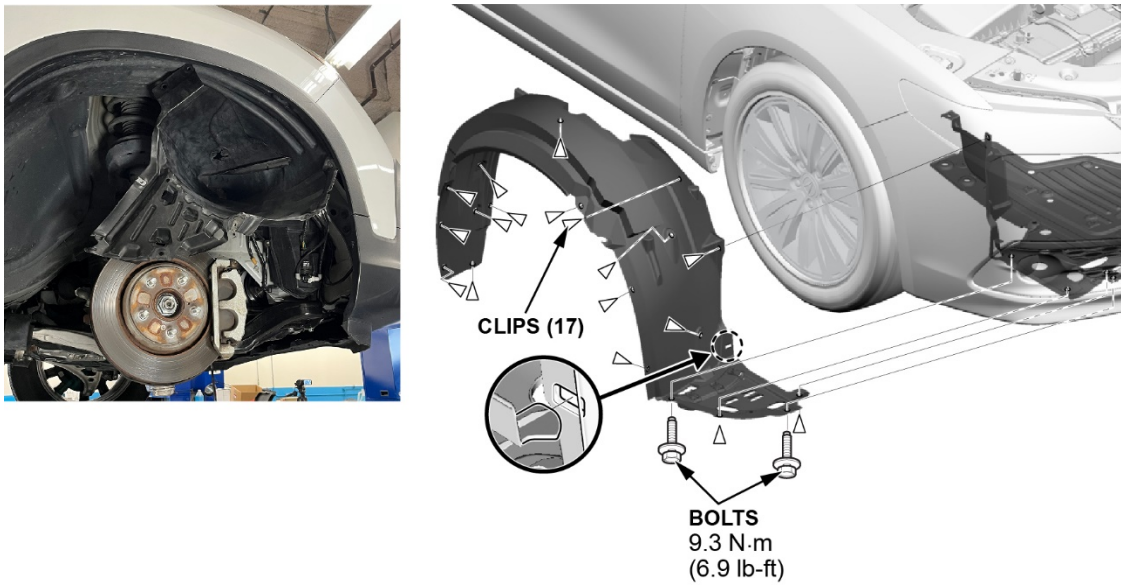


14. Drain the engine oil.

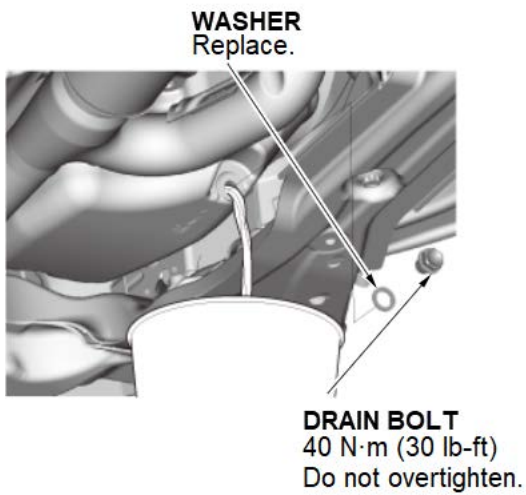


15. Remove the splash shield.

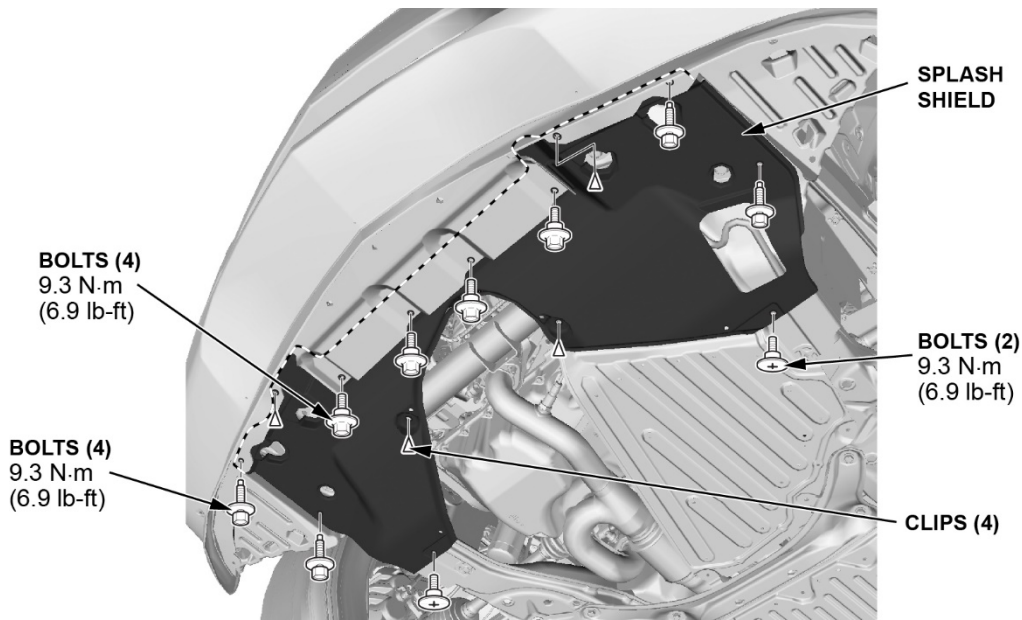


16. Remove the engine undercover.

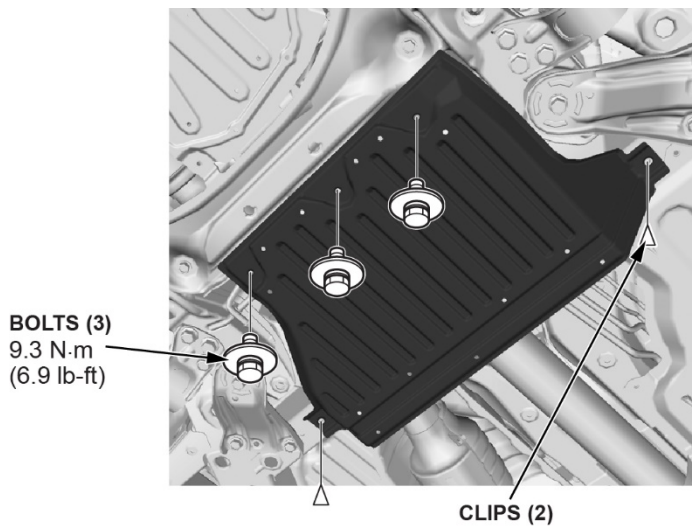

17. Remove the transmission undercover.

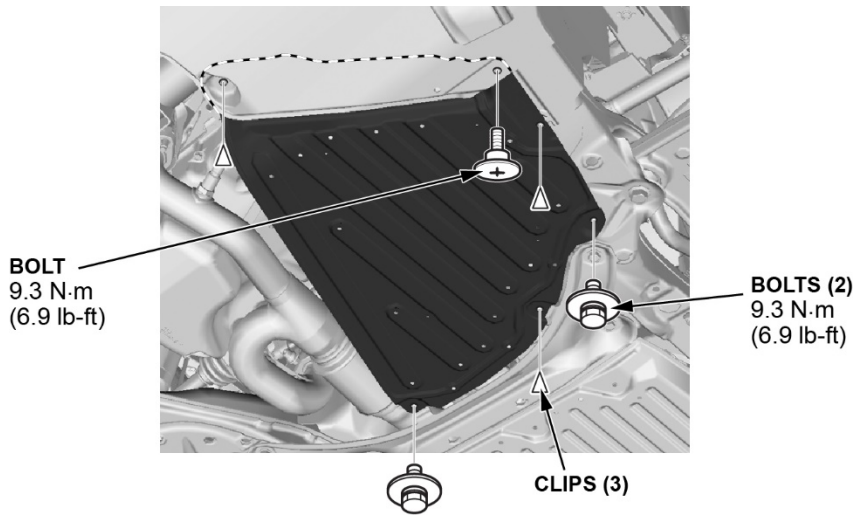

18. With cylinder 1 at TDC, mark the crankshaft pulley with a vertical line at the 6 o'clock position.

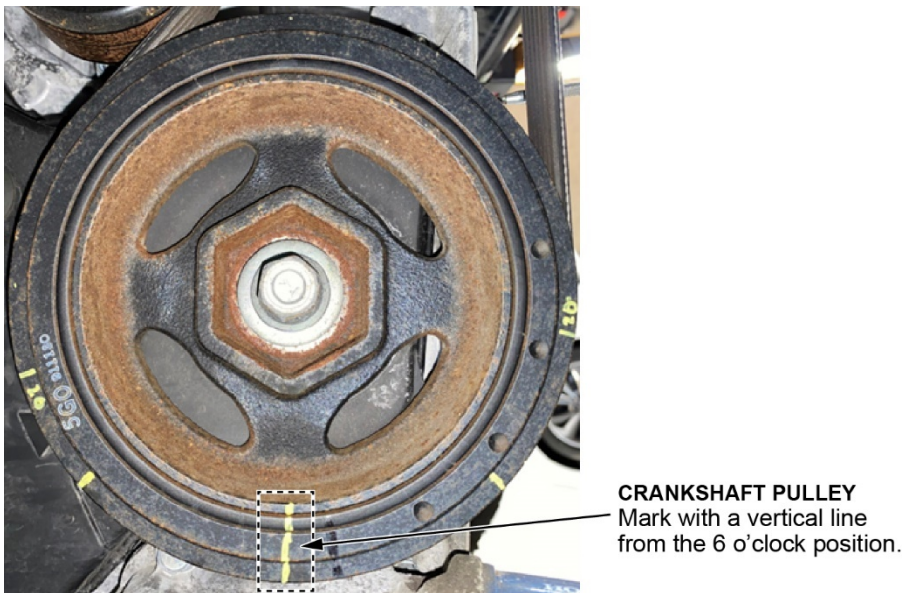

19. Attach the crank angle gauge to the crankshaft balancer pulley with **position #1** on the crank angle gauge aligned at the 6 o'clock position.

Click here to view video:

[▶ PLAY VIDEO](#)

NOTE: The back of the gauge is magnetic and will hold onto the pulley.



**CRANK ANGLE GAUGE
P/N 07AAJ-5G0A100**

20. Attach a large, commercially available zip tie to the subframe below the crankshaft pulley. The zip tie will be a **reference indicator** for a correct crank angle gauge position.


- Make sure it is pointing up at the 6 o'clock position on the pulley.
- The zip tie should extend roughly **8" to 12"** over the subframe.




ZIP TIE
Attach a zip tie to the frame
and line up as shown.

21. Unplug the bank 2 oxygen sensor, HO2S.


NOTE: Exhaust may be HOT.

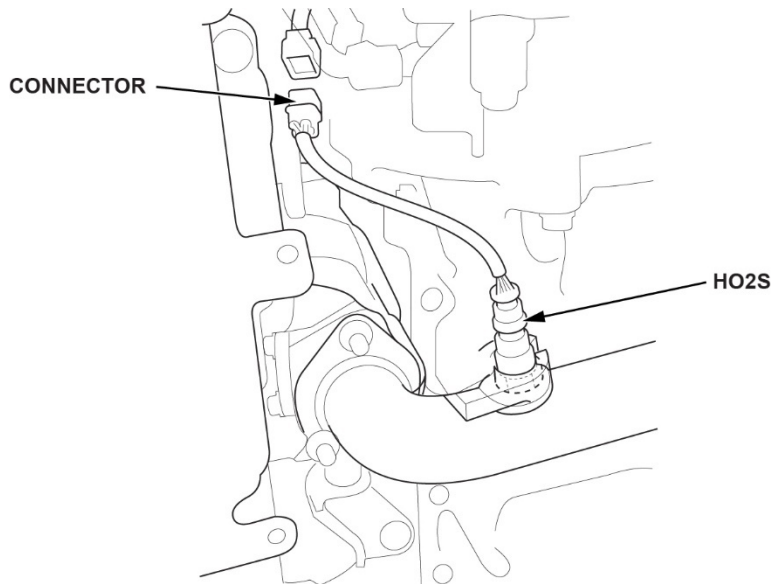


22. Remove the subframe stiffener plate.

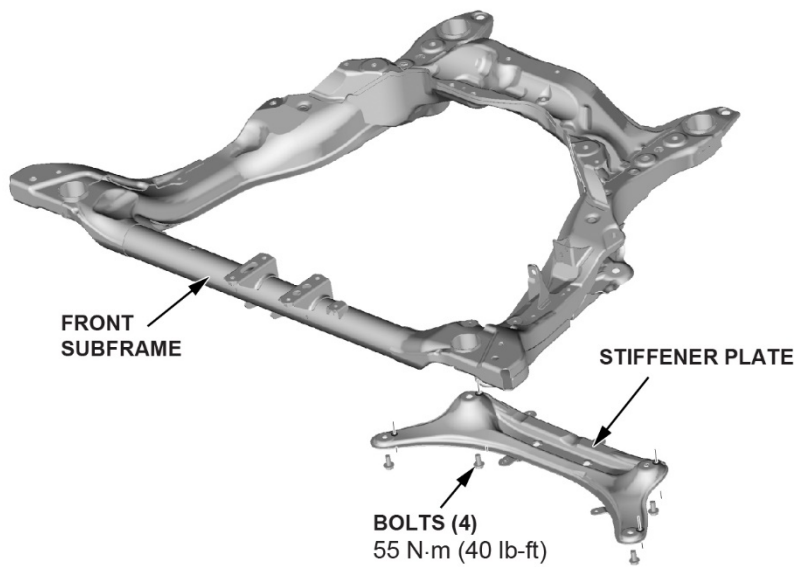


23. Remove the under-floor TWC (A-pipe).

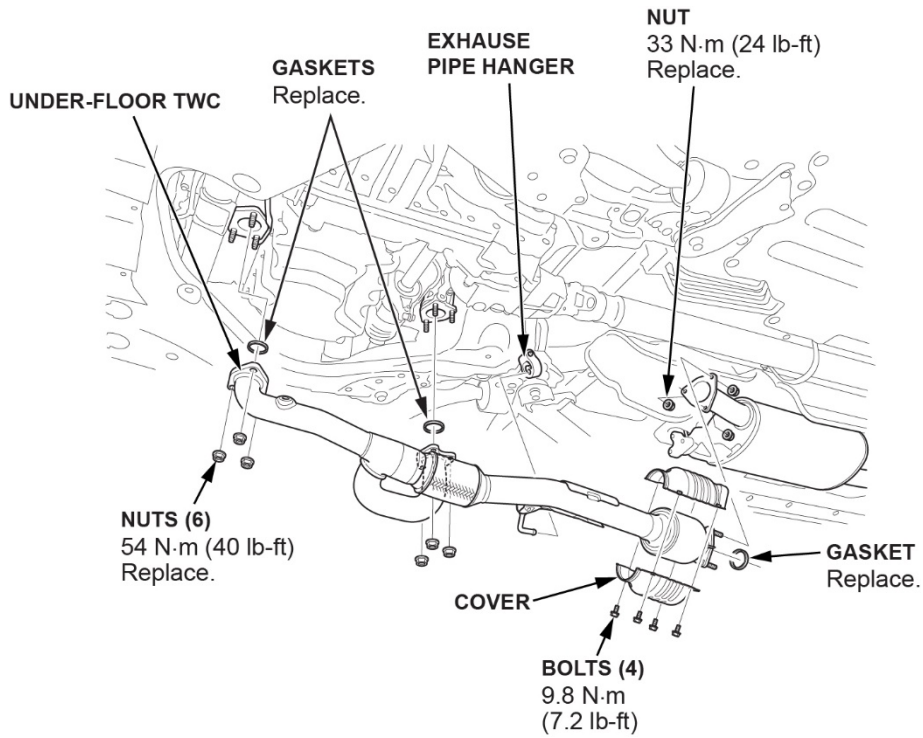

24. Remove the CKP sensor cover, then disconnect the CKP sensor.

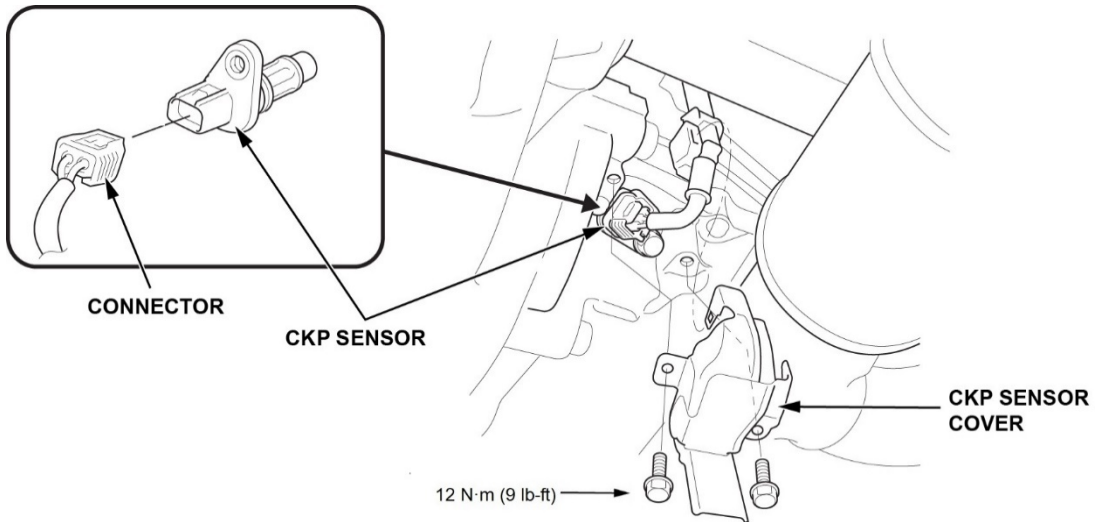

25. Remove the torque converter cover and the four lower transmission mounting bolts.

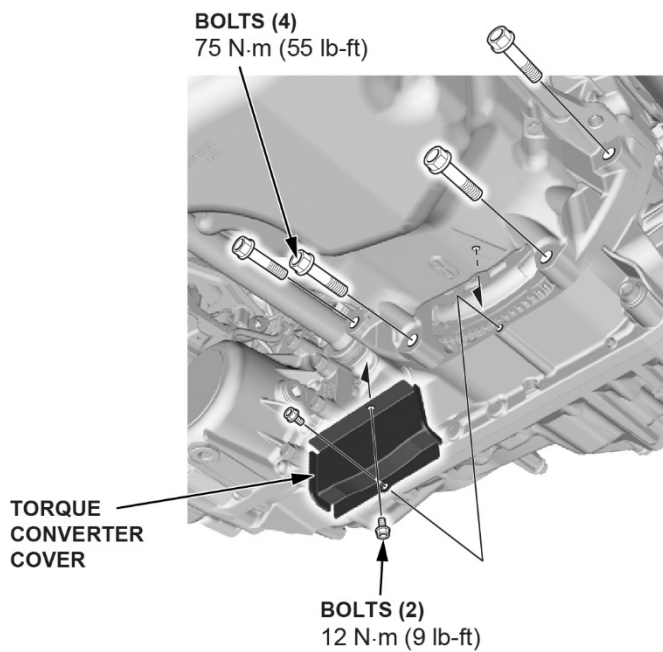


26. Remove the engine oil pan.

CAUTION


Hot engine oil may continue to drip from the engine which can cause burns or eye damage. Wear proper protective equipment and eyewear to avoid injury.

NOTE:

- Remove the bolts securing the oil pan.
- Use a flat blade screwdriver to separate the oil pan from the engine block.

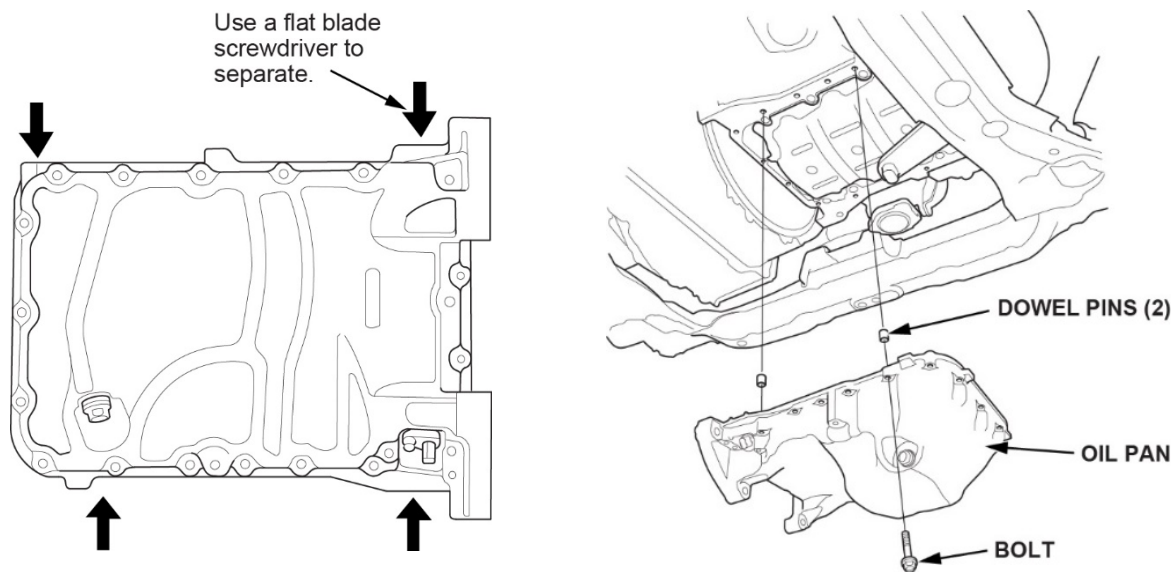


27. Remove the oil strainer and baffle plate.

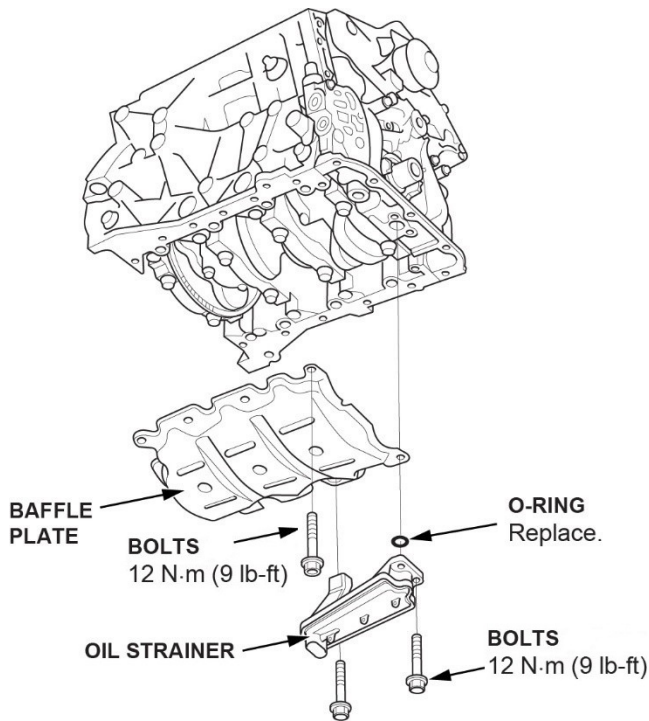


28. Clean and label each connecting rod cap with a paint marker (or otherwise suitable marking instrument) prior to removal. Make sure each rod cap has both the **cylinder #** and an **orientation arrow** pointing to the front of the vehicle.

NOTE:

- Do not confuse the existing marking on the side of the connecting rod and rod cap with the cylinder number. These are manufacturing marks referring to the size of the rod.
- Installing a rod cap incorrectly will result in engine knock and/or engine failure.

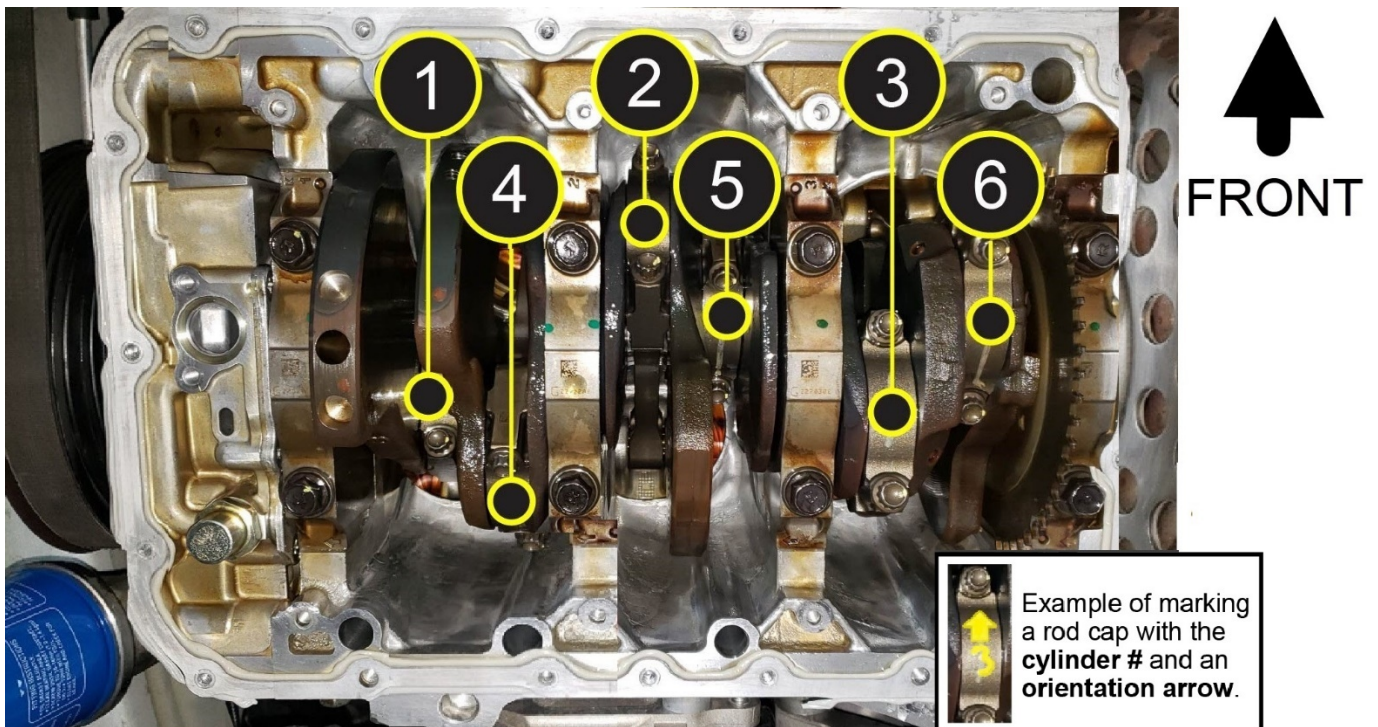

29. Make sure the Bearing Photo Box (Tool Number: 07AAK-5J2A200) and Inspection Trays are available for use.

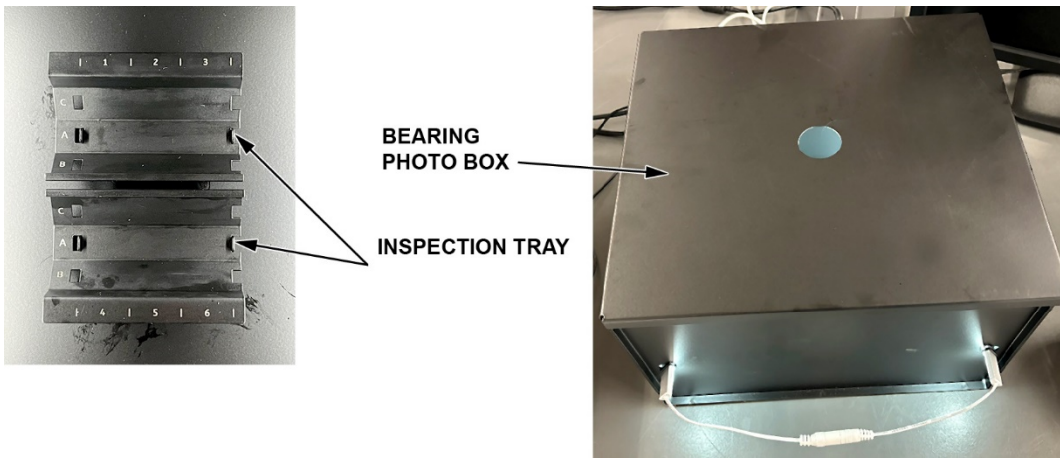

30. Make sure the **cylinder 1** is at TDC, (**position #1**).



31. Remove the **connecting rod bearing cap and lower bearing** for **cylinders 1,3,5, and 6**.

Step/Crankshaft Position	Cylinder 1 Bearing Cap and Lower Bearings	Cylinder 3 Bearing Cap and Lower Bearings	Cylinder 5 Bearing Cap and Lower Bearings	Cylinder 6 Bearing Cap and Lower Bearings
#1/At TDC	Remove	Remove	Remove	Remove

Click here to view video:




NOTE:

- Follow the removal of the connecting rod bearing steps precisely to prevent damage to the crankshaft journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearings with a clean shop towel after removal. There should be no oil residue remaining. **Do not use solvents.**


32. Place the removed lower bearings from **cylinders 1,3,5, and 6** into the inspection tray.

NOTE:

- Thoroughly clean the bearings with a clean shop towel prior to placing the bearing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

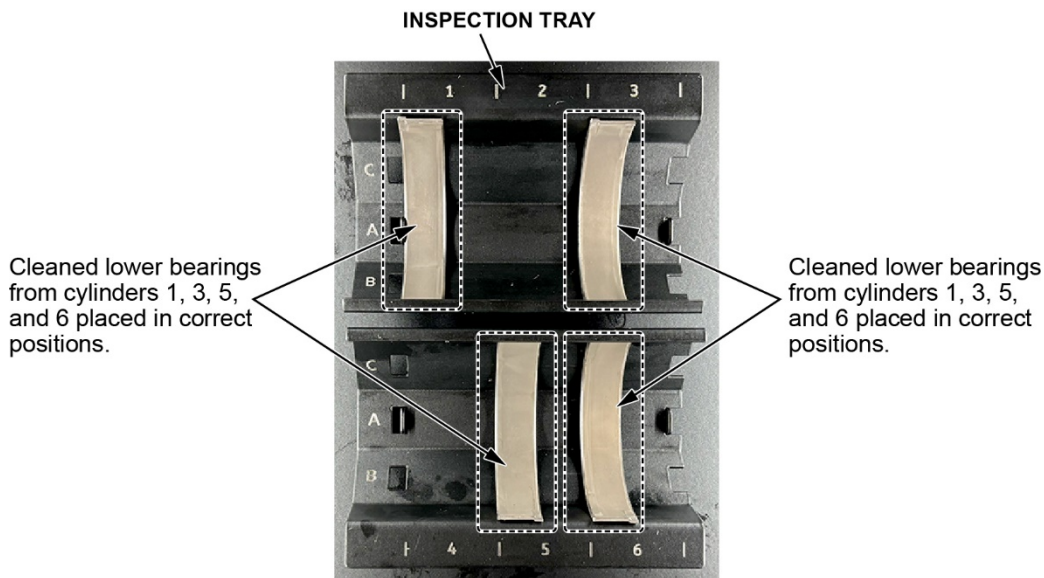

33. Rotate the crankshaft clockwise to the **#2 position** (TDC +45°).

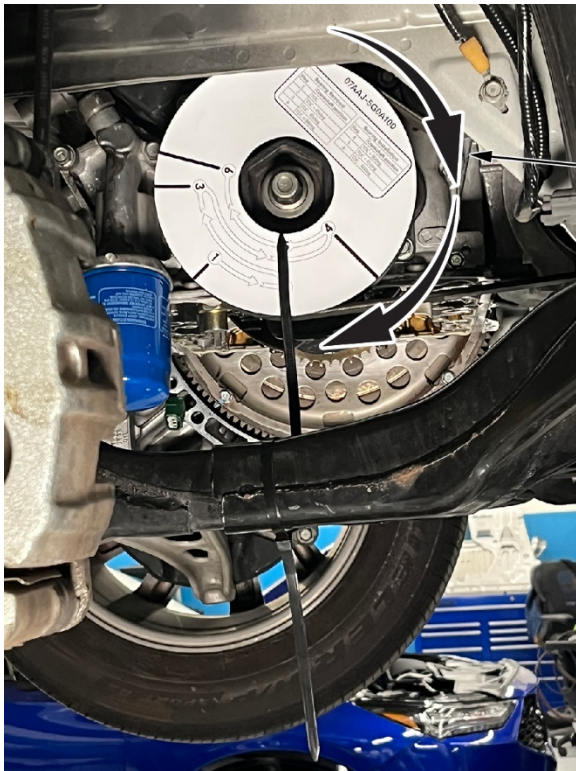

Rotate the crank clockwise to the #2 position.

34. Remove the **cylinder 2 connecting rod bearing cap and lower bearing**.

Step/Crankshaft Position	Cylinder 2 Bearing Cap and Lower Bearings
#2/TDC +45°	Remove


NOTE:

- Follow the removal of the connecting rod bearing steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**

35. Place the removed lower bearing from **cylinder 2** into the inspection tray.

NOTE:

- Follow the removal of the connecting rod bearing steps precisely to prevent damage to the crank journal and connecting rods.
- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing arrangement** in the tray **does not matter**.

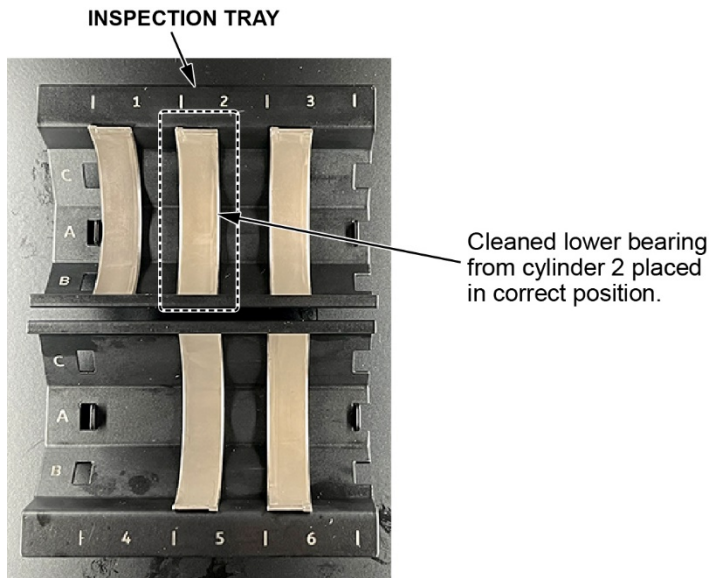

36. Remove the **cylinder 2 upper connecting rod bearing**.

Step/Crankshaft Position	Cylinder 2 Upper Bearing
#2/TDC +45°	Remove

NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**
- Use the rod holder tool as needed, hand tighten only.


Click here to view video:



M8 ROD HOLDER
P/N 07AAB-5G0A100



EXAMPLE OF USING THE M8 ROD HOLDER TOOL

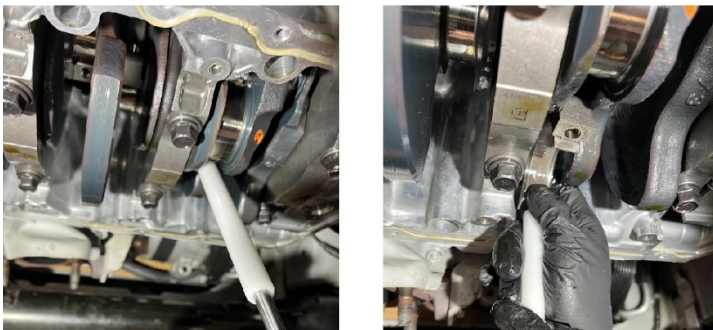


1. Thread the M8 rod holder tool into the connecting rod bolt hole.
2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
5. Using the M8 rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
6. Remove the M8 rod holder tool.
7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use any solvents.**

37. Place the removed **upper bearing** from **cylinder 2** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

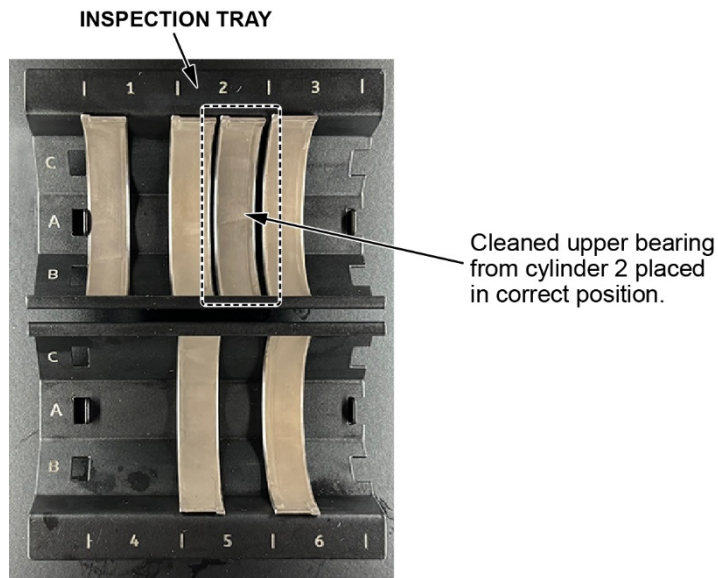

38. Rotate the crankshaft counterclockwise to the **#3 position** (TDC -45°).

Rotate the crank counterclockwise to the #3 position.



39. Remove the **cylinder 4 connecting rod bearing cap and lower bearing**.

Step/Crankshaft Position	Cylinder 4 Rod Cap and Lower Bearing
#3/TDC -45°	Remove


NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**

40. Place the removed **lower bearing** from **cylinder 4** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

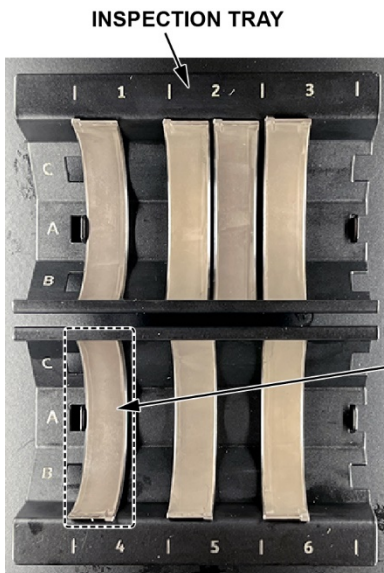

Cleaned lower bearing from cylinder 4 placed in correct position.

41. Remove the **cylinder 3 upper connecting rod bearing**.

Step/Crankshaft Position	Cylinder 3 Upper Bearing	Cylinder 4 Upper Bearing
#3/TDC -45°	Remove	Remove

NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
 - The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
 - Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**
 - Use the rod holder tool as needed, hand tighten only.
1. Thread the M8 rod holder tool into the connecting rod bolt hole.
 2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
 3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
 4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
 5. Using the M8 rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
 6. Remove the M8 rod holder tool.
 7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use solvent.**


42. Remove the **cylinder 4 upper connecting rod bearing**.

1. Thread the M8 rod holder tool into the connecting rod bolt hole.
2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
5. Leave the **cylinder 4** connecting rod in the lower position, **do not** push back up.
6. Remove the M8 rod holder tool.
7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use solvent.**


43. Place the removed **upper bearings** from **cylinder 3 and 4** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not** use any solvents.
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

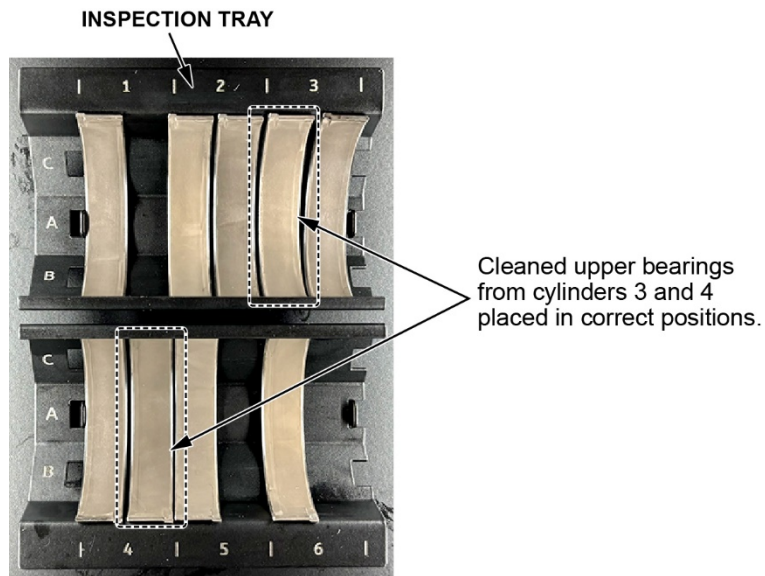

44. Rotate the crankshaft clockwise to the **#4 position** (TDC +90°).

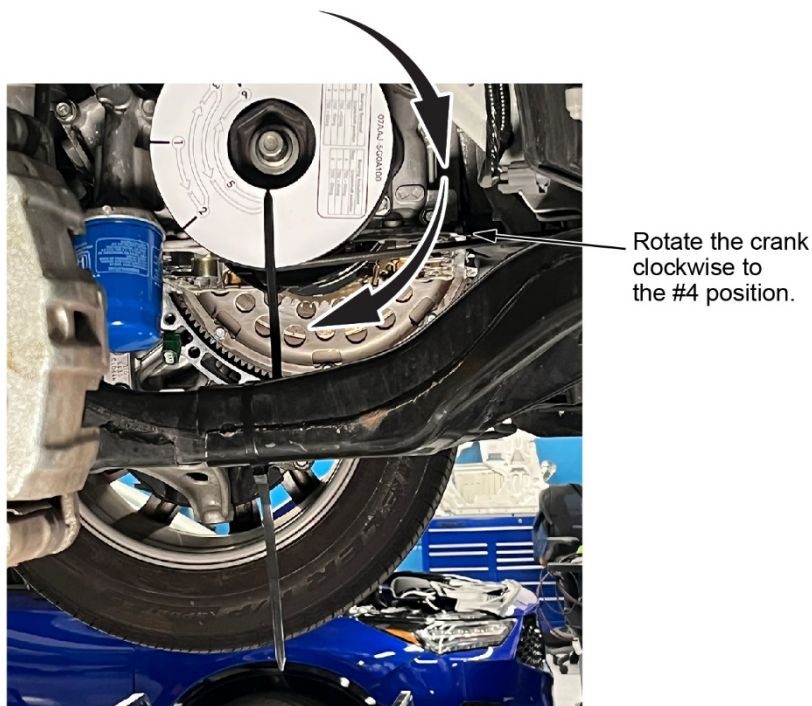

45. Remove the **upper bearing from cylinders 1, 5, and 6.**

Step/Crankshaft Position	Cylinder 1 Upper Bearing	Cylinder 5 Upper Bearing	Cylinder 6 Upper Bearing
#4/TDC +90°	Remove	Remove	Remove


NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
 - The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
 - Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**
 - Use the rod holder tool as needed, hand tighten only.
1. Thread the M8 rod holder tool into the connecting rod bolt hole.
 2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
 3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
 4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
 5. Using the M8 rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
 6. Remove the M8 rod holder tool.
 7. Thoroughly clean the bearings with a clean shop towel to remove all oil residue. **Do not use any solvents.**

46. Place the removed **upper bearings from cylinders 1, 5, and 6** into the inspection tray.


NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing arrangement in the tray does not matter.**

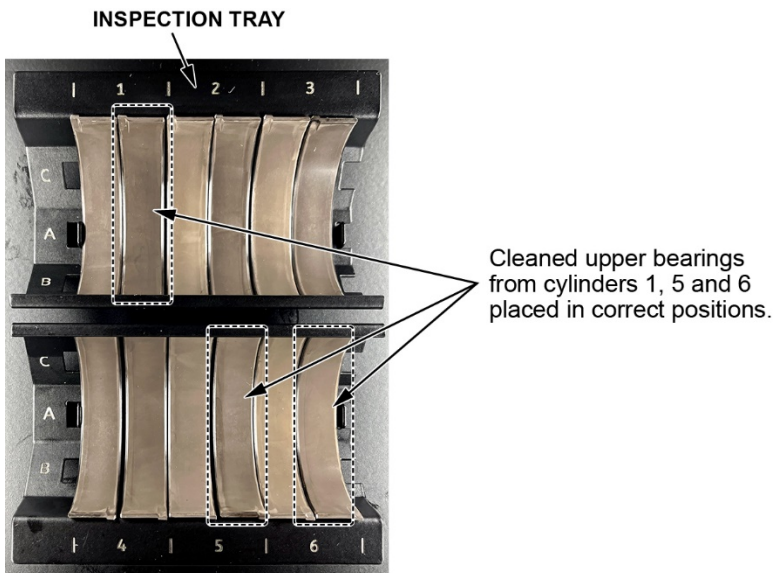


47. Make sure the bearings are fully seated and level with the edge of the inspection tray.

- The bearing's indexing tab should be lined up at the numbers.
- The flat edge of the bearing should be inside the lip.
- All bearings should be fully seated.

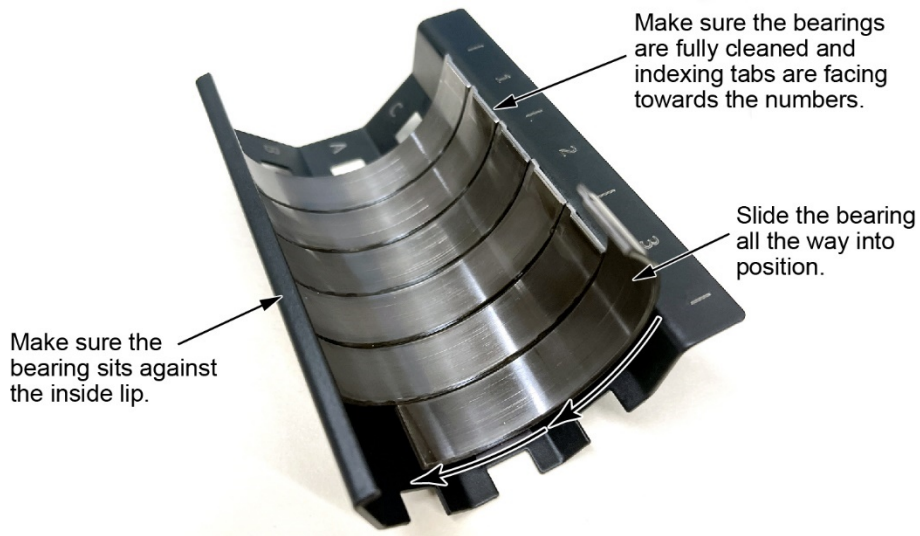

48. Remove the bearing photo box cover and place the bearing inspection trays in the bearing photo box.

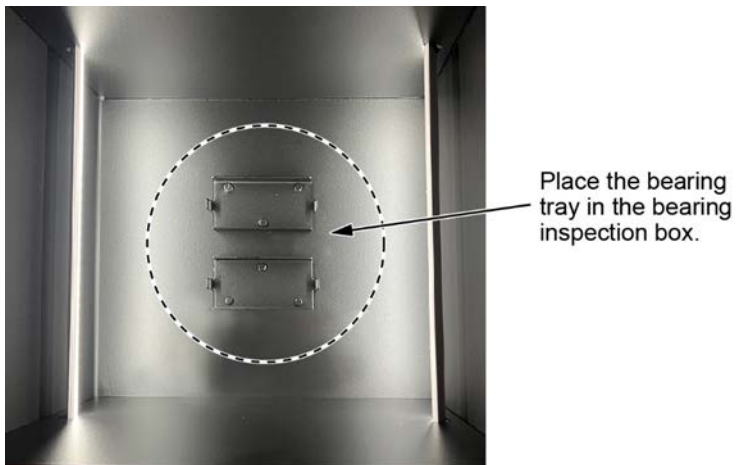


49. Confirm the following is ready on the bearing photo box:

8. Lights at the brightest setting.

NOTE: The lighting can be adjusted with a long hold on the button.

9. Both bearing trays in position A with non-numbered sides facing each other.

10. The O-rings are set on the lights to prevent an outside light source.

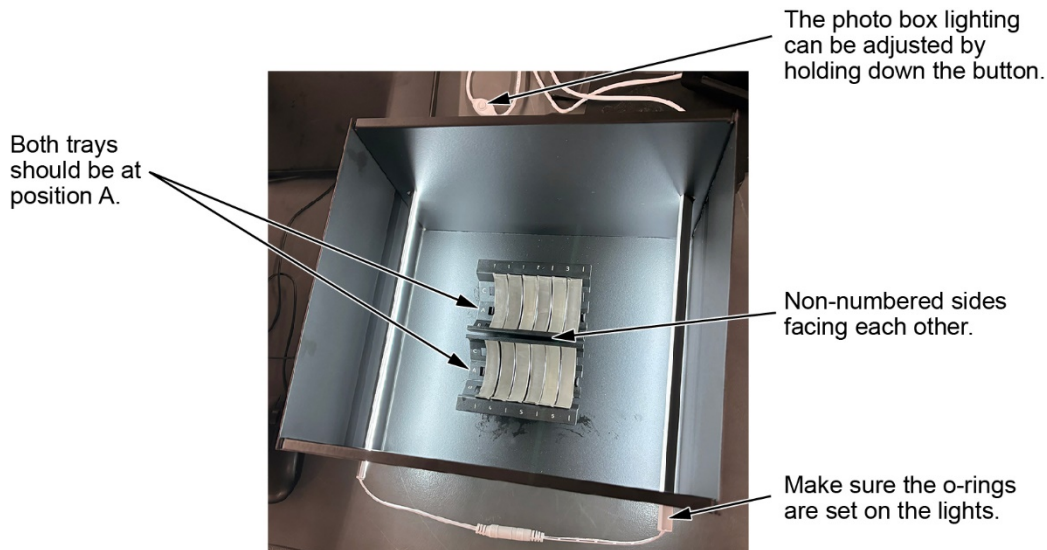


50. Login to the V-SMART application.

NOTE: Scanning the VIN will return to where you left off.

51. Using the V-SMART application, follow the instructions on the application to take bearing photos in positions A, B, and C. Follow the prompts when submitting the photos.

NOTE:

- Use the camera tap focus for a clear image.
- Any unclear images will not be accepted.
- Follow the V-SMART tool prompts after photo submission.

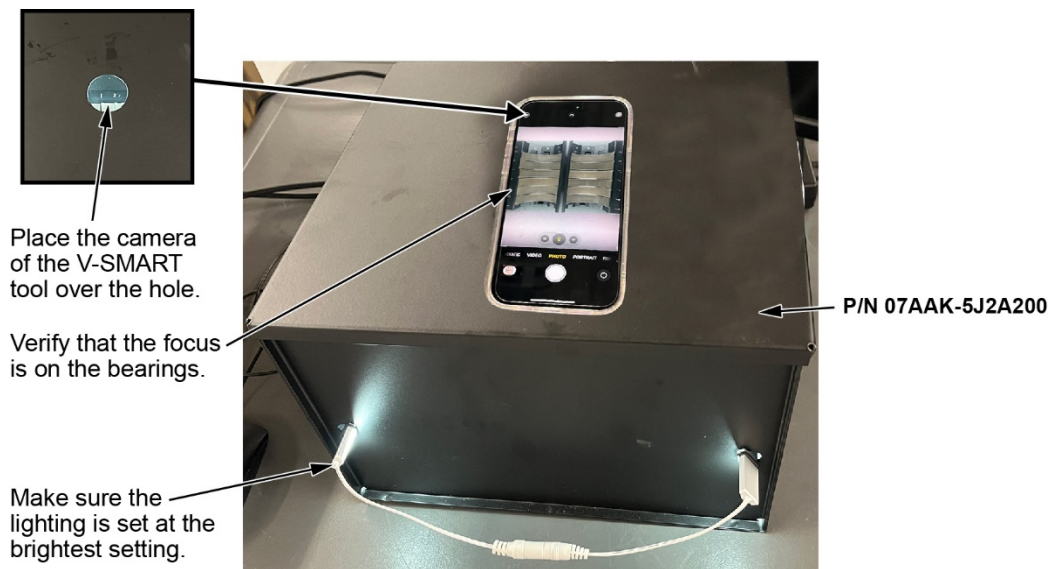


When taking the photos:

Tap here to focus camera.




52. Create a Bearing Inspection Inquiry.

1. Log into iN.
2. Select **SERVICE > REMAN PARTS / SPECIAL ORDERS > BEARING INSPECTION INQUIRY**
3. Select the **BEARING INSPECTION INQUIRY**.
4. Input the correct VIN.

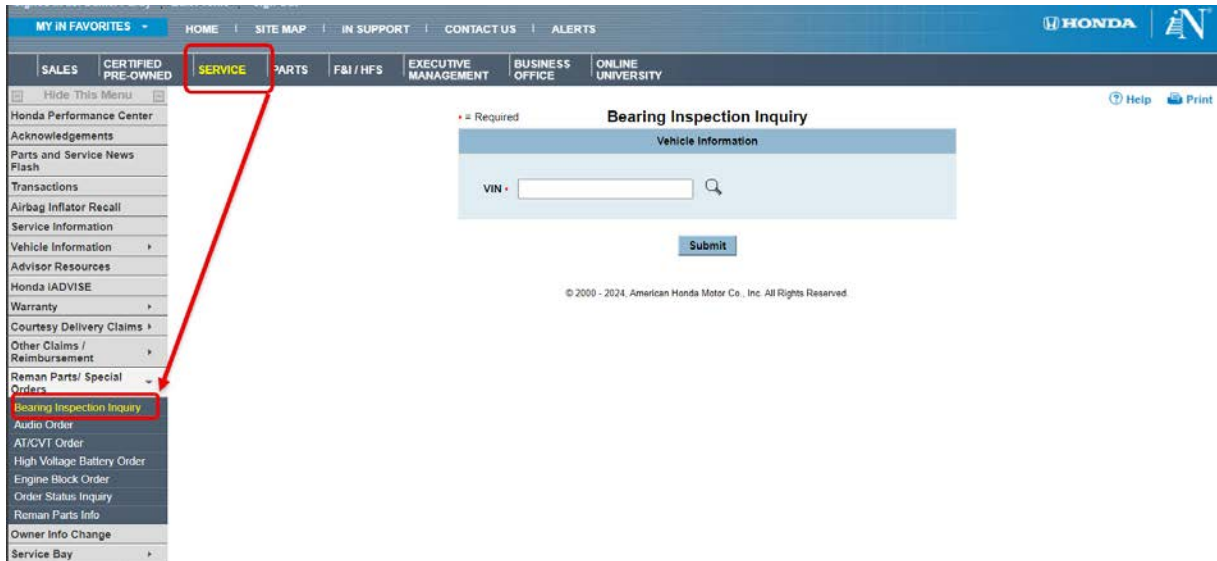

5. Input all vehicle information (including the correct VIN) to create a case.

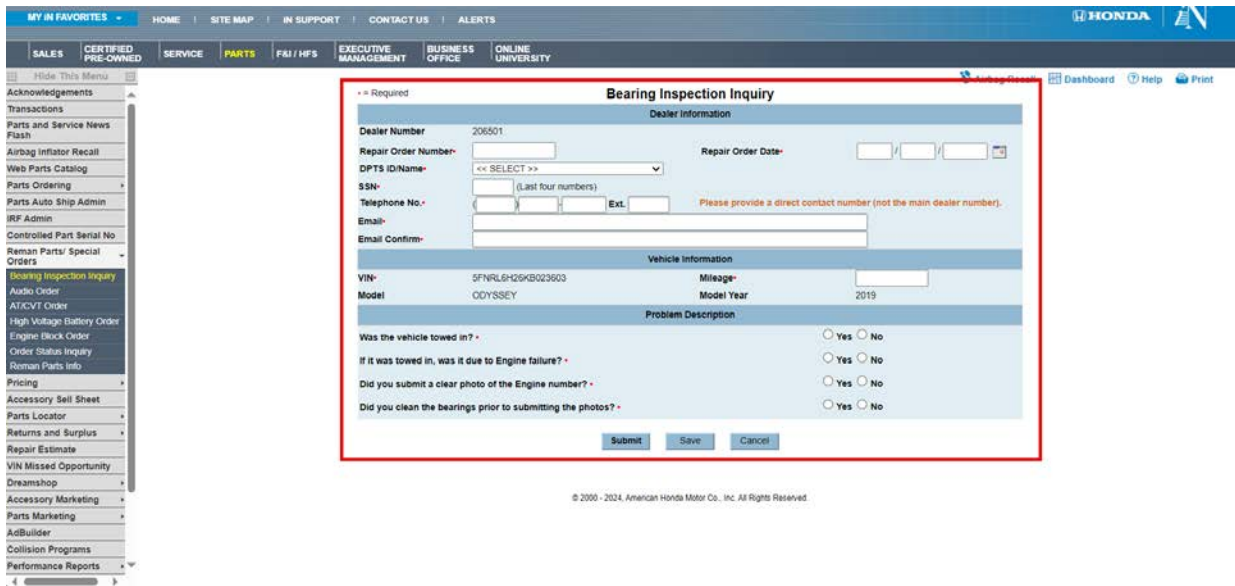

6. A **7-digit case reference number** will be generated.
7. Call the **Bearing Inspection Inquiry Team** at **(800) 824-6632**. Press **9** to be routed to the correct department (**do not contact TECH LINE for this**). Give the answering agent the **7-digit reference number** for repair direction.

NOTE: MAKING THE INCORRECT SELECTION WILL RESULT IN INCREASED WAIT TIMES.

53. The bearing inspection agent will give the **Repair Direction**. You will receive instructions via email on the repair method that includes the unique warranty code and the bearing sizes with their specific locations, if applicable. Parts will be AUTO shipped to your dealership. Make sure to advise the parts department with a copy of the RO.

NOTE: Link to CONTENT REFERENCE, ([Click HERE](#)).


INSPECTION B

NOTE: DO NOT contact Tech Line for any inquiries to this safety recall. You must call the Bearing Inspection Inquiry Team at (800) 824-6632 (**Select Option #9**) for all inquiries and repair direction.

1. Turn the steering wheel all the way to the right.
2. Relieve the fuel pressure.

With the i-HDS:


1. Connect an interface tool to the data link connector (DLC) located under the driver's side of the dashboard and launch i-HDS.

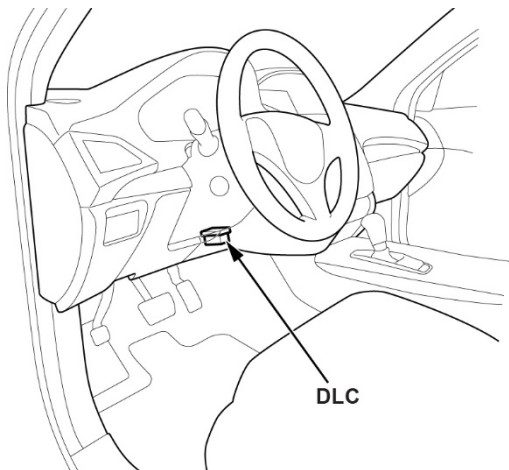

2. Turn the vehicle to ON.
3. Select the **PGM-FI** system on the i-HDS.
4. Select **FUEL PUMP OFF** from the **Inspection Menu** and follow the on-screen instructions.


Without the i-HDS:

1. Remove the PGM-FI main relay 2 from the under-dash fuse/relay box.
 2. Start the engine and let it idle until it stalls.
 3. Turn the vehicle to OFF.
 4. Install the PGM-FI main relay 2.
2. Remove the front bulkhead cover.

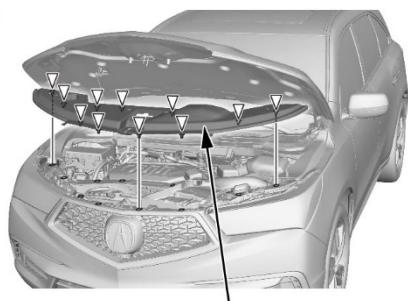


FRONT BULKHEAD COVER

3. Remove the air intake tube.

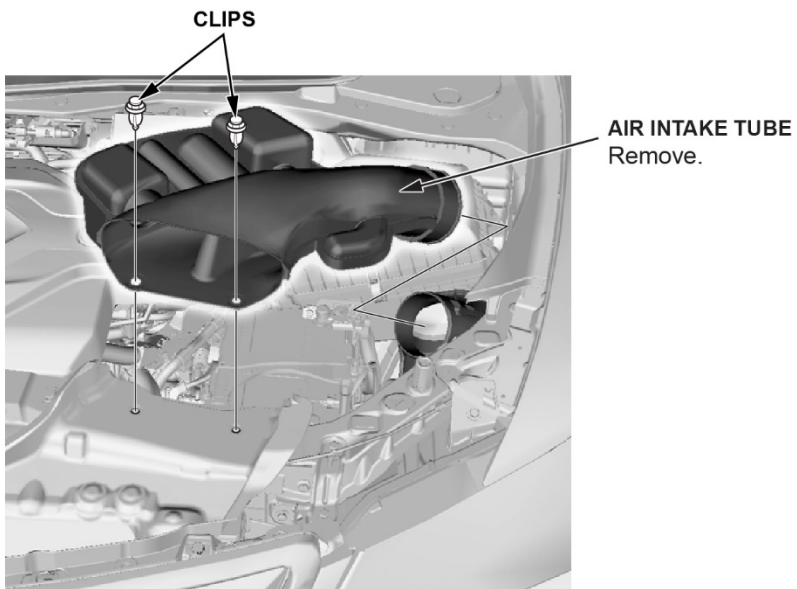


4. Disconnect the 12-volt battery.

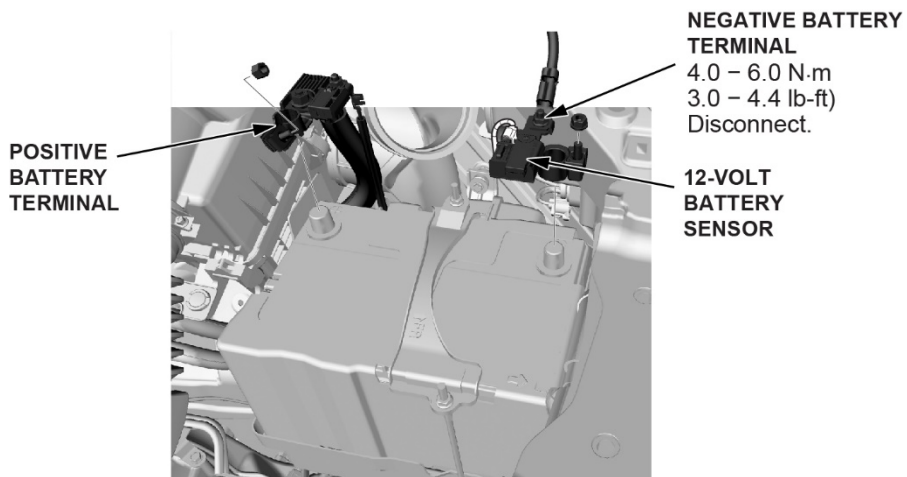

5. Remove the oil dipstick.

6. Disconnect and remove the coil packs.


FRONT

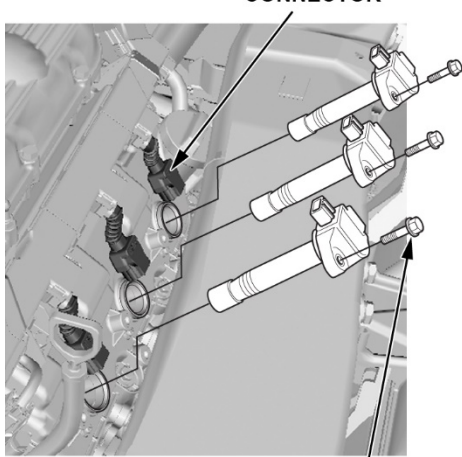

CONNECTOR

BOLTS
12 N·m
(9 lb-ft)

REAR

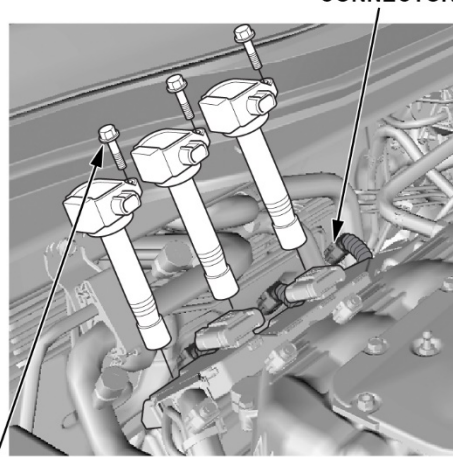


CONNECTOR

BOLTS
12 N·m
(9 lb-ft)


7. Remove the spark plugs.

FRONT

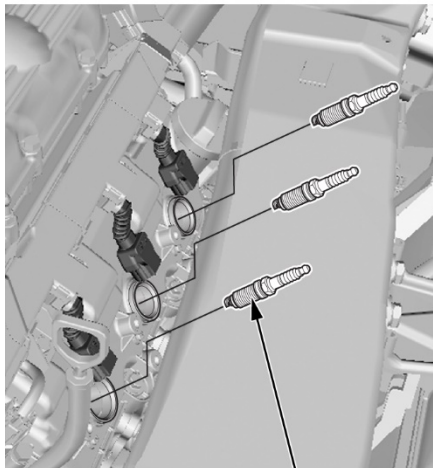


SPARK PLUGS
22 N·m (16 lb-ft)

REAR

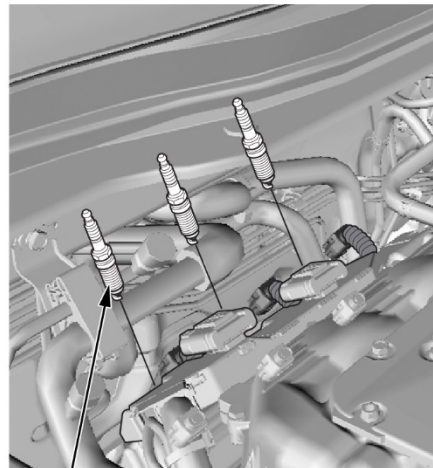


SPARK PLUGS
22 N·m (16 lb-ft)


8. Raise the vehicle.

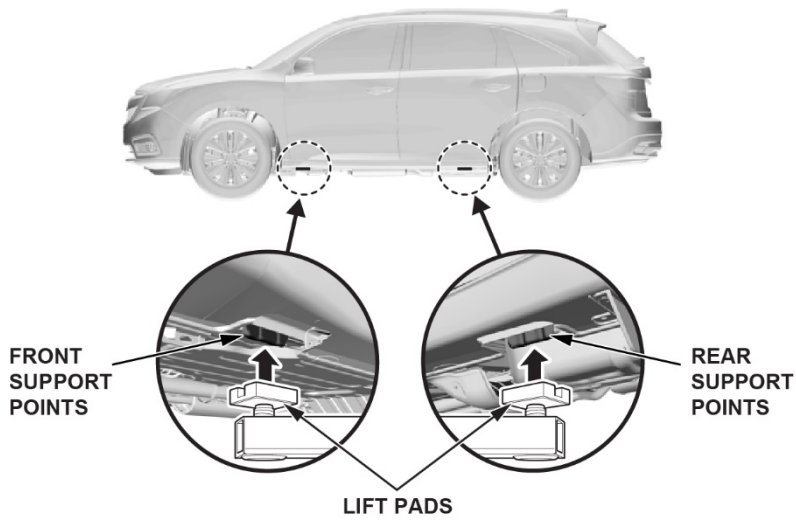


9. Remove the splash shield.

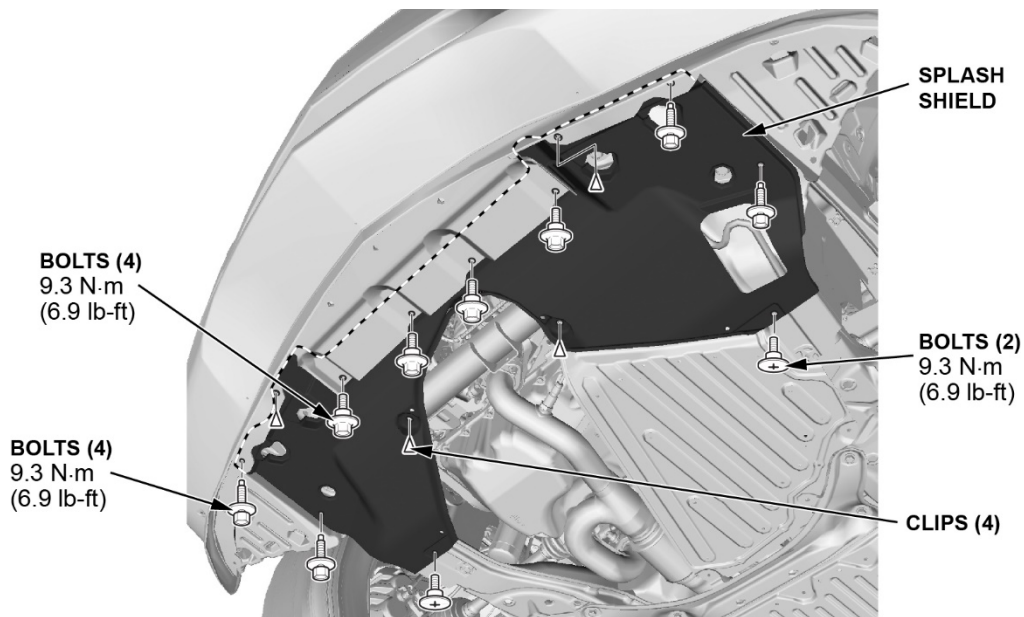

10. Remove the engine undercover.

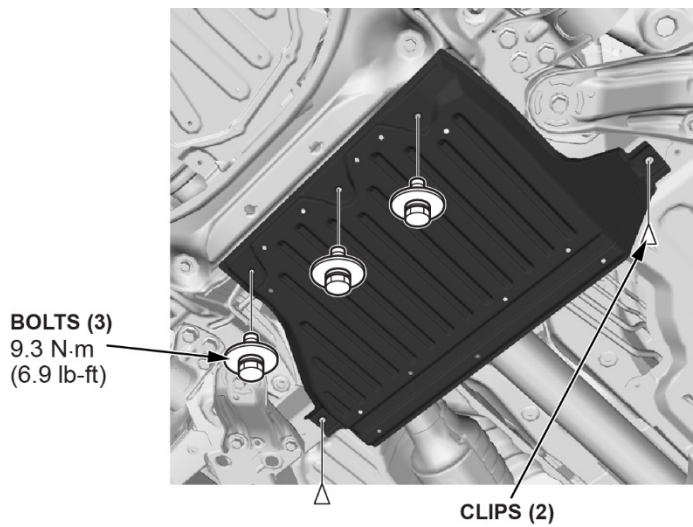


11. Remove the transmission undercover.

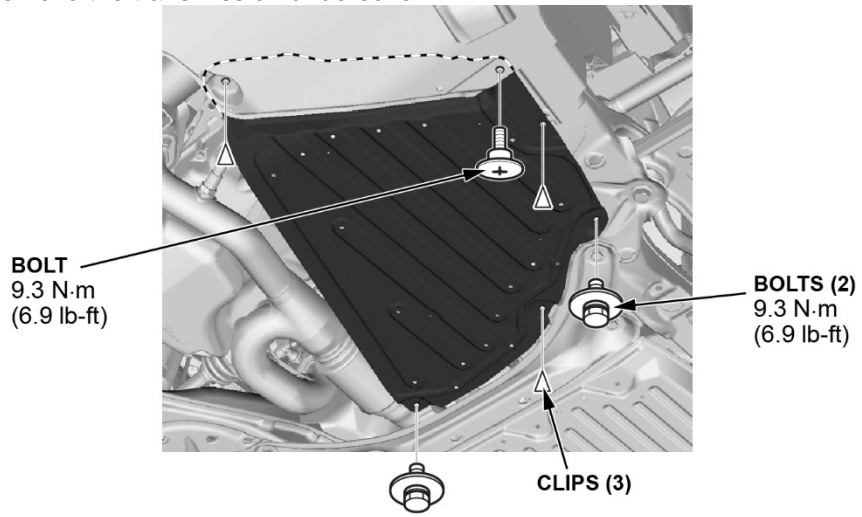

12. Remove the passenger side front wheel.


13. Remove the drive belt.

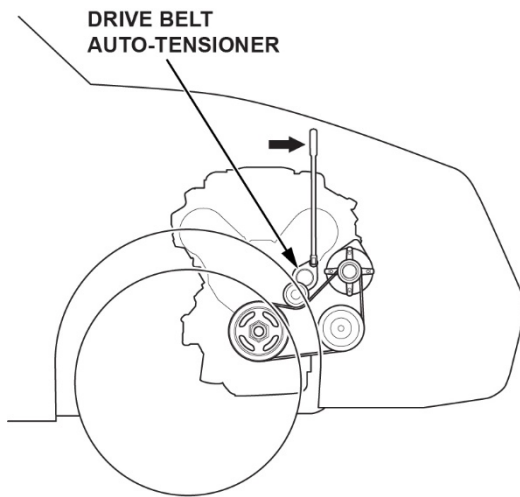

14. Separate the passenger's side tie rod ball joint.

1. Remove the cotter pin.
2. Remove the nut.
3. Disconnect the tie rod end ball joint from the knuckle using the ball joint thread protector and the ball joint remover.


NOTE: Be careful not to damage the ball joint boot when installing the ball joint remover.

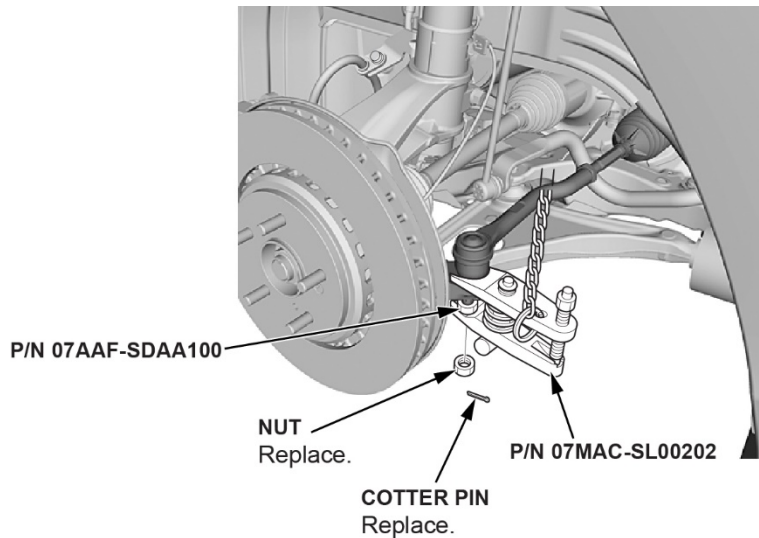

15. Separate the passenger's side lower knuckle ball joint.


1. Remove the lock pin.
2. Remove the castle nut.
3. Disconnect the lower arm ball joint from the knuckle using the ball joint thread protector and the ball joint remover.

NOTE: Be careful not to damage the ball joint boot when installing the ball joint remover.

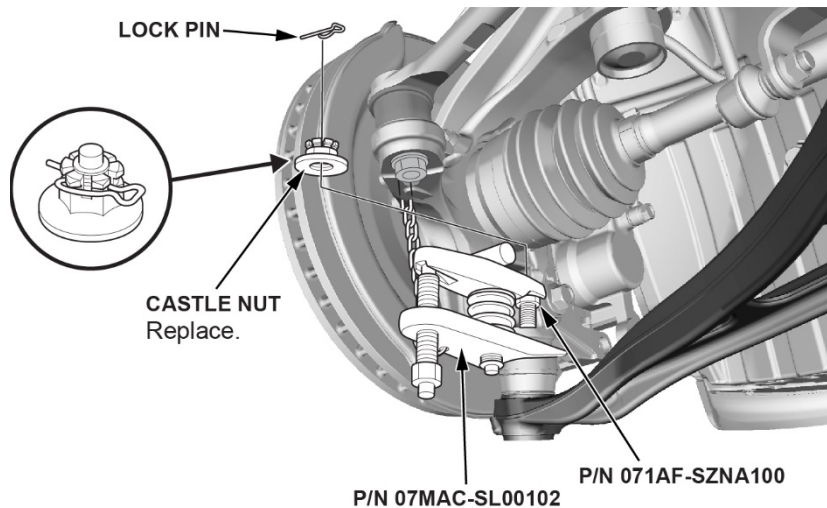


16. Remove the passenger's side driveshaft:


1. Remove the front spindle nut.
2. Pull the knuckle outward and separate the outboard joint from the front hub using a soft face hammer.

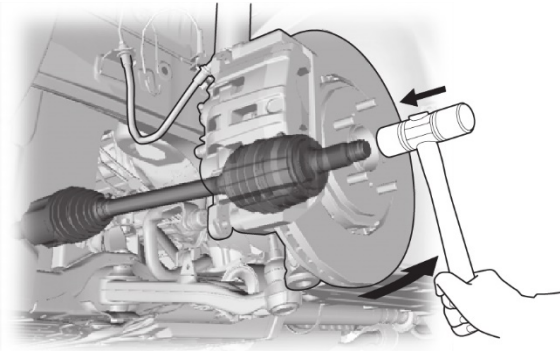

3. Drive the inboard joint off of the intermediate shaft using a drift punch and a hammer.

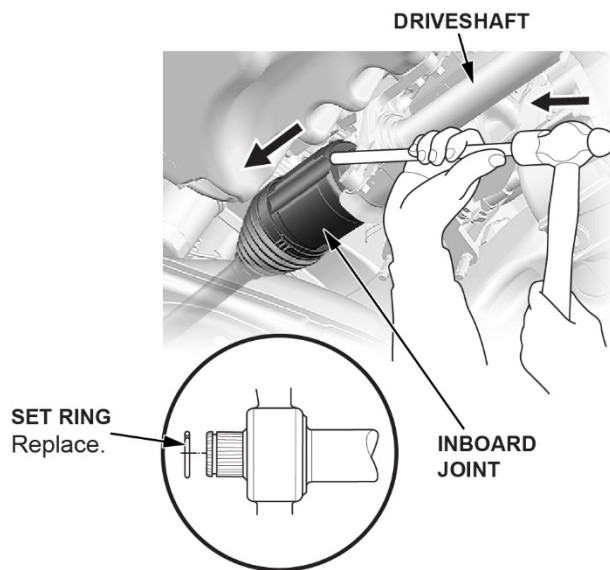


4. Remove the driveshaft as an assembly.
 5. Remove and replace the set ring.
17. Remove the lower mounting bolts of the A/C compressor.

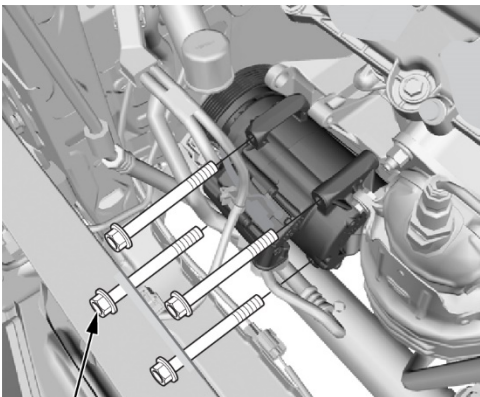


BOLTS (4)
22 N·m (16 lb-ft)


18. Remove the lower bolt of the bulkhead brace.

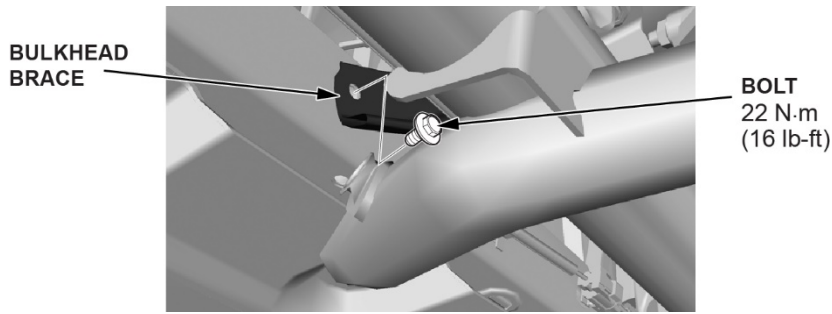

19. Pull back the passenger fender liner to gain access to the crankshaft pulley (the crank angle gauge should be visible).

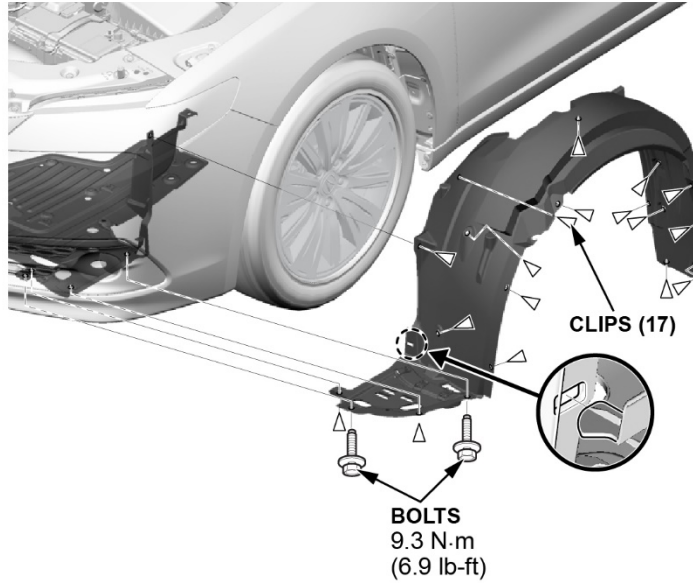


20. Drain the engine oil.

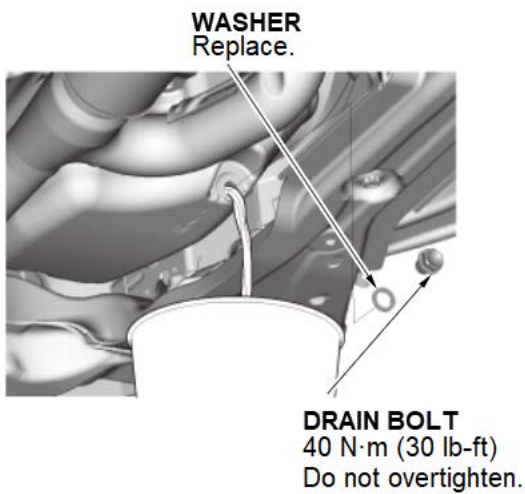


21. Unplug the bank 2 oxygen sensor.


NOTE: Exhaust may be HOT.

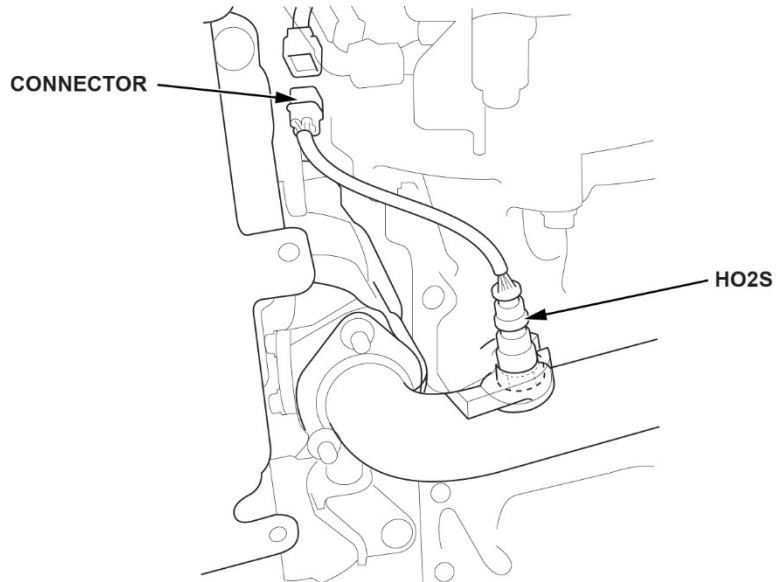


22. Remove the subframe stiffener plate.

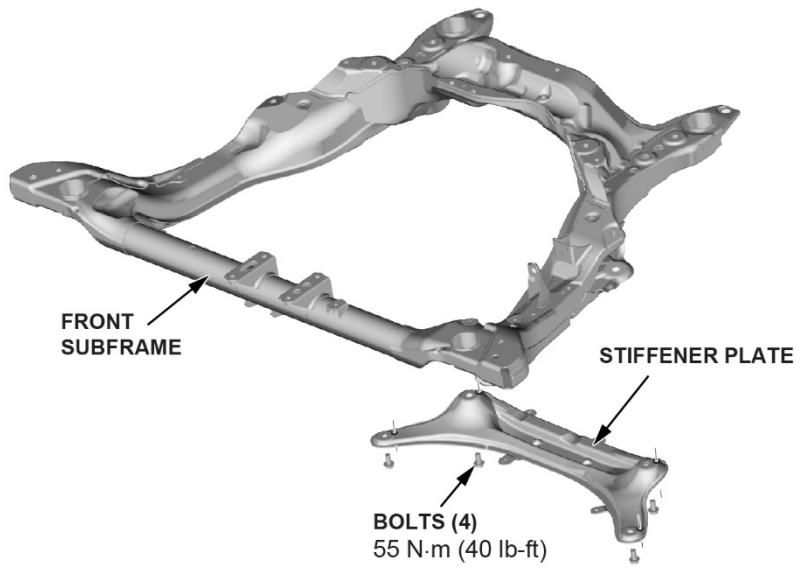


23. Remove the under-floor TWC (A-pipe).

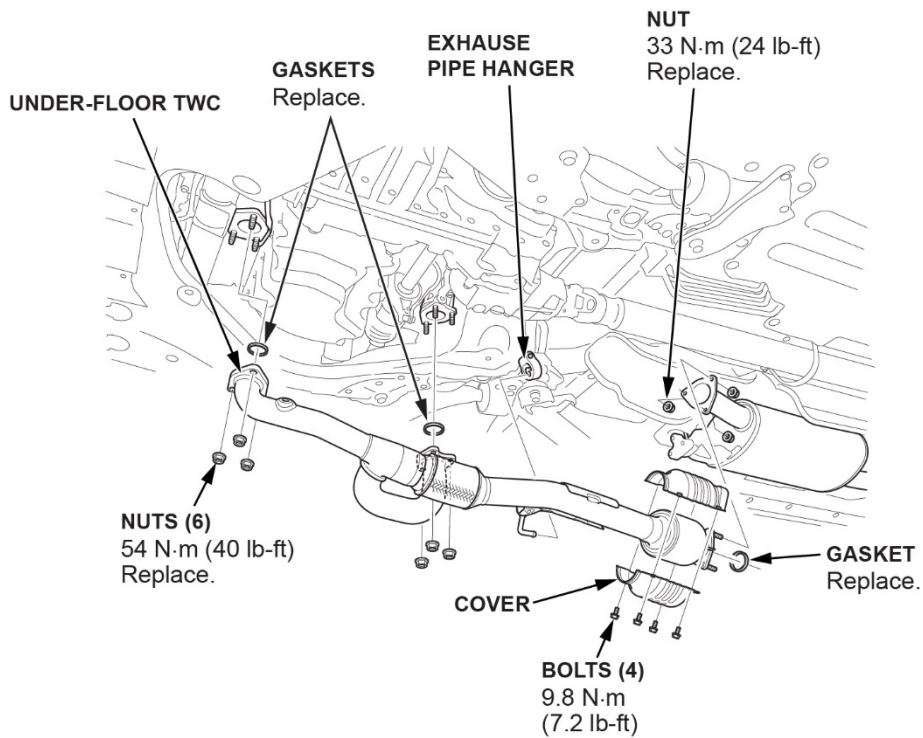

24. Remove the CKP sensor cover, then disconnect the CKP sensor.

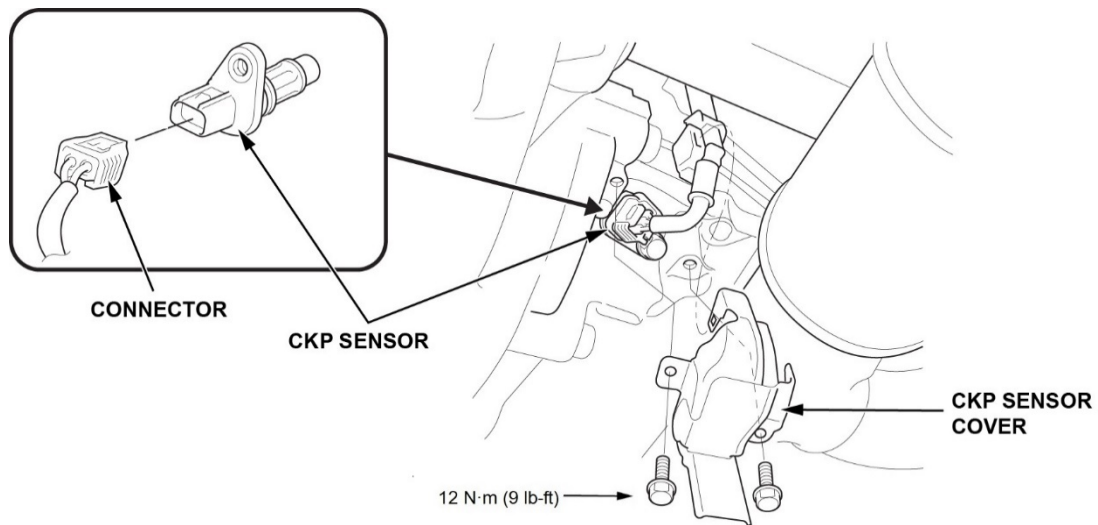


25. Remove the torque converter cover and the four lower transmission mounting bolts.

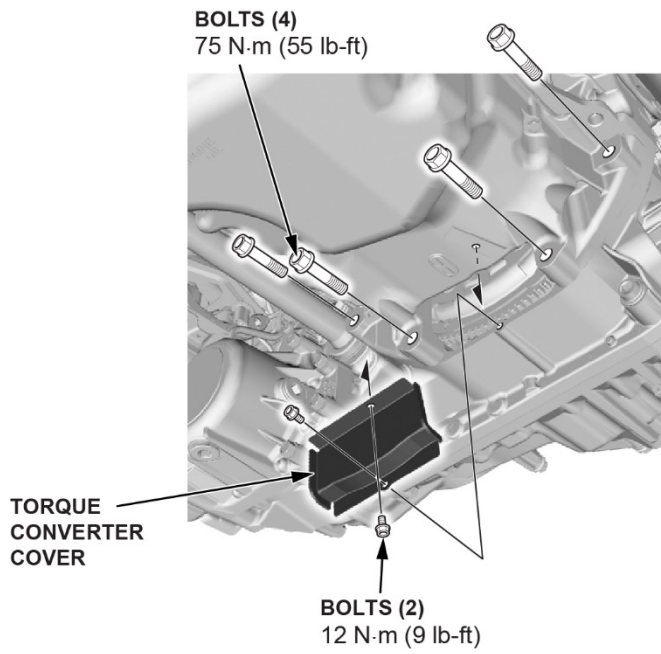

26. Lower the vehicle.


27. Remove the bulkhead.

14 – 16 MY SHOWN

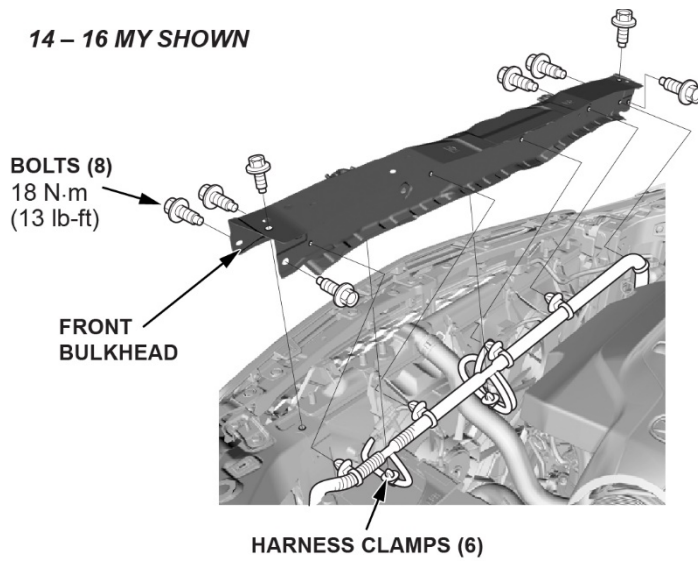


28. Remove the passenger's side bulkhead brace.

LOOKING DOWN FROM UNDER HOOD

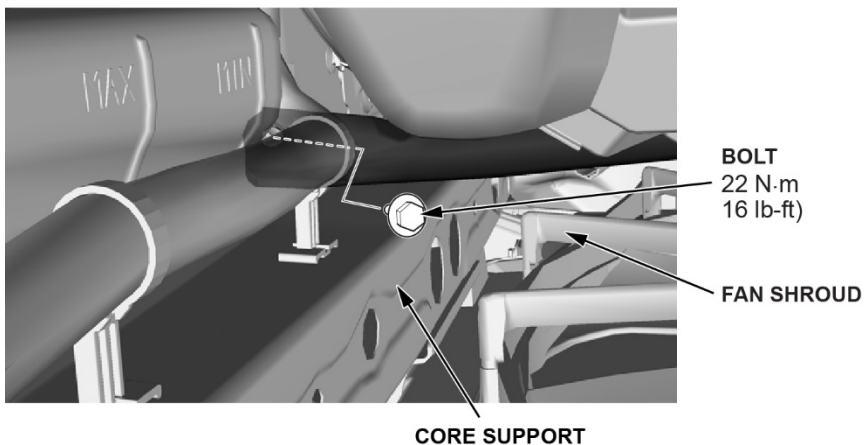


29. Disconnect and remove the condenser fan.

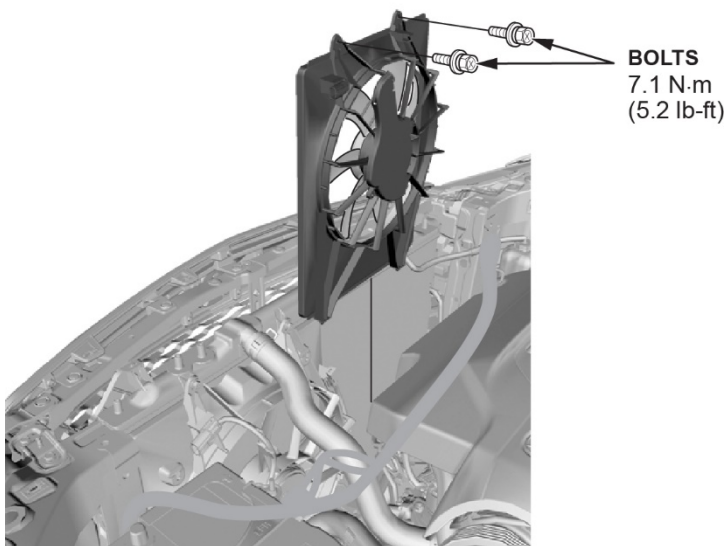


30. Remove the alternator.

1. Disconnect the positive alternator cable, the alternator connector, and the A/C compressor clutch connector.
2. Remove the harness clamp and bolt.

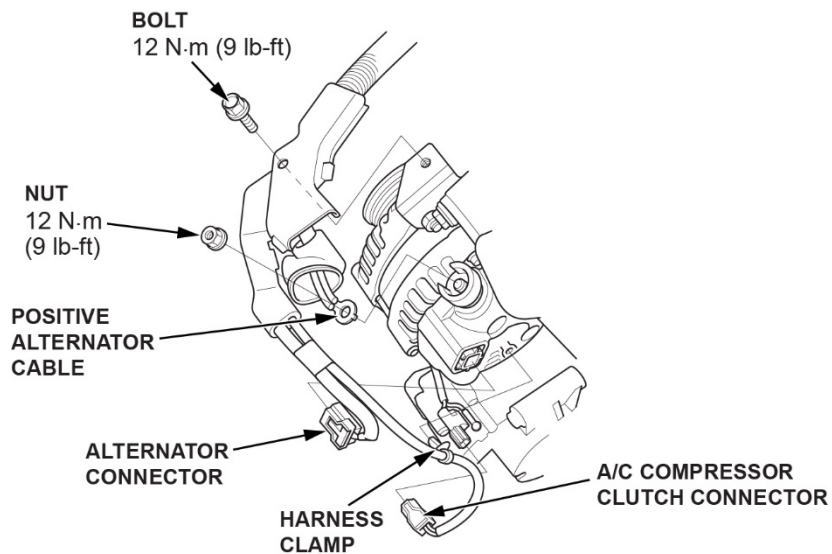


31. Remove the alternator

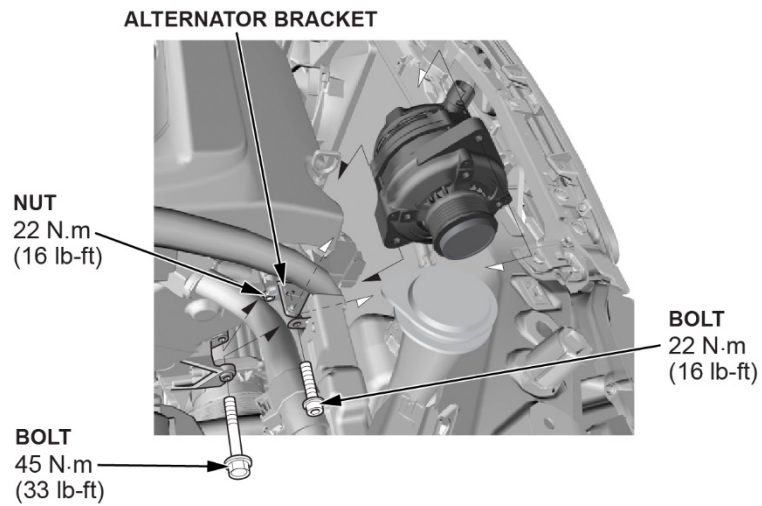

32. Install the radiator shield to protect the radiator.


NOTE:

- A suitable radiator shield could be as simple as a clean piece of cardboard.
- Make sure the shield covers the entire radiator surface that was exposed with the fan removed.

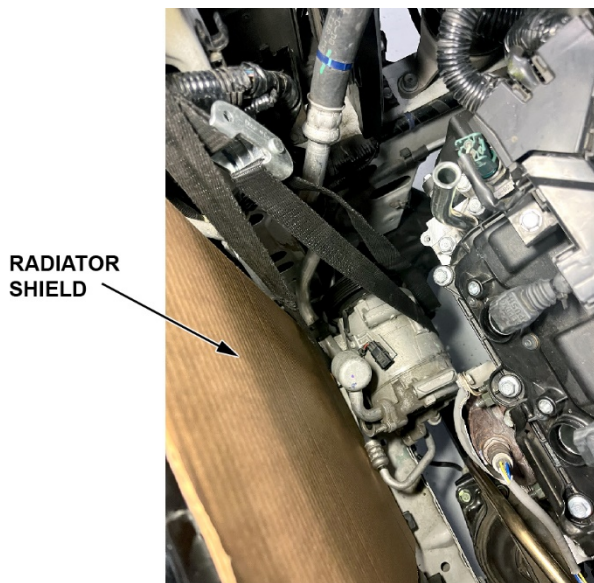


33. Remove the upper A/C compressor mounting bolts and move the A/C compressor forward to rest on the bulkhead frame by the radiator and secure with a strap.

NOTE: Do not disconnect the A/C hoses.

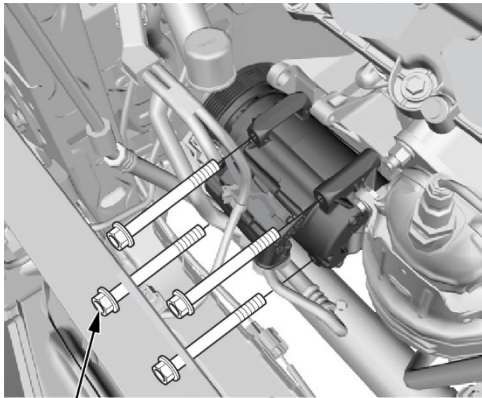


BOLTS (4)
22 N·m (16 lb-ft)

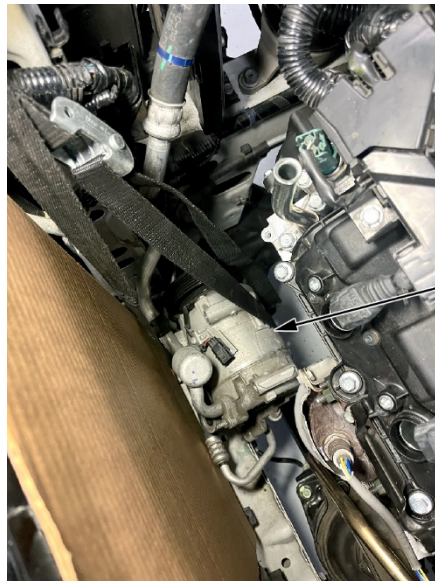

**SECURED
COMPRESSOR**

34. Raise the vehicle.

35. Remove the A/C compressor bracket leaving the drive belt auto tensioner attached. Torque to **45 N·m (33 lb-ft)** on installation.



BOLTS (4)
45 N·m
(33 lb-ft)


36. Remove the engine oil pan.

⚠ CAUTION


Hot engine oil may continue to drip from the engine which can cause burns or eye damage. Wear proper protective equipment and eyewear to avoid injury.

- Remove the bolts securing the oil pan.
- Use a flat blade screwdriver to separate the oil pan from the engine block.


37. Using a flat blade screwdriver, separate the oil pan from the engine block in the places shown.

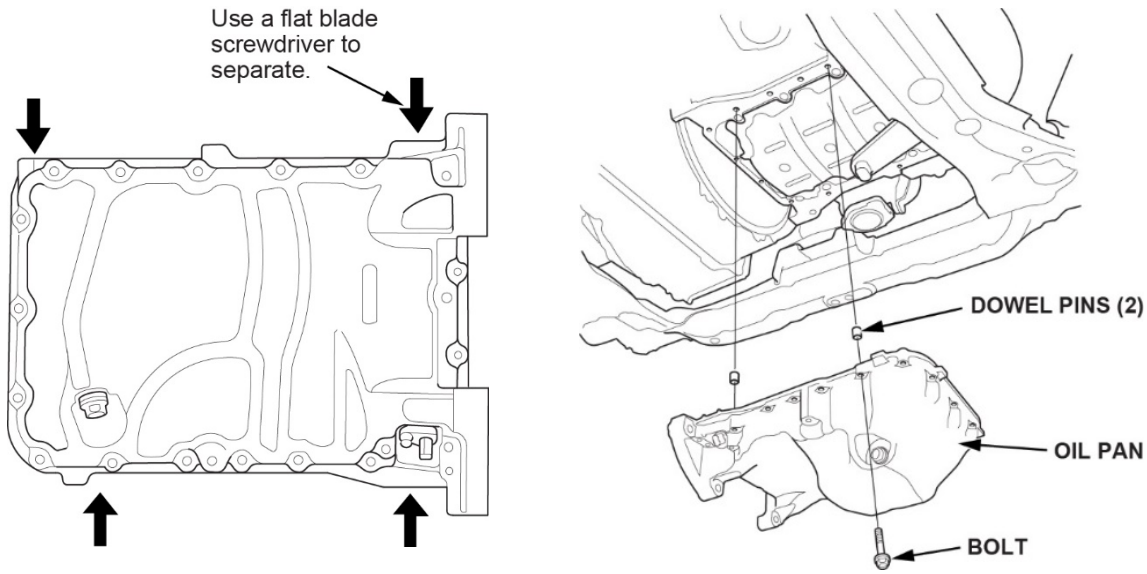

38. Remove the oil strainer and baffle plate.

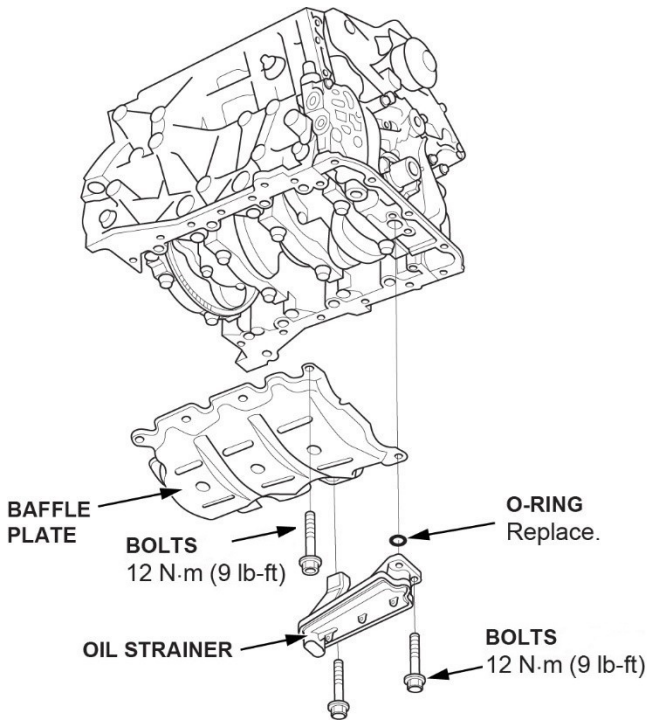

39. Remove the #1 main bearing cap.

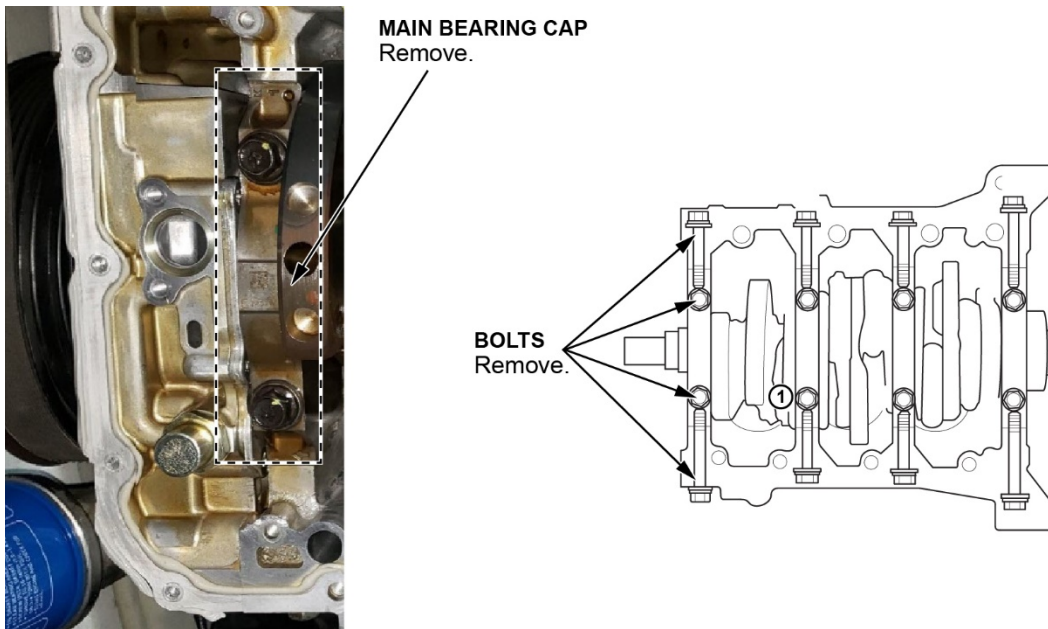


40. Login to V-SMART application.


41. Enter the connecting rod journal codes.




CONNECTING ROD
JOURNAL CODE

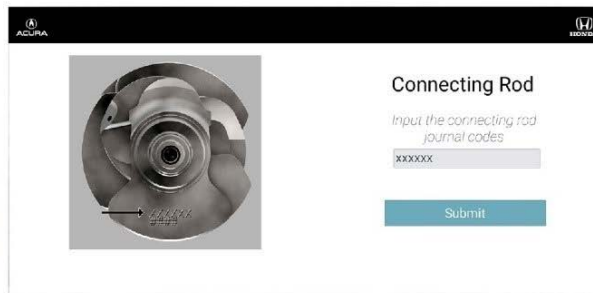


42. Enter the crankshaft journal codes.

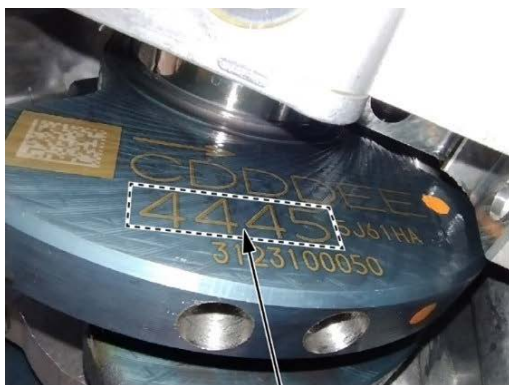

CRANKSHAFT MAIN
JOURNAL CODE

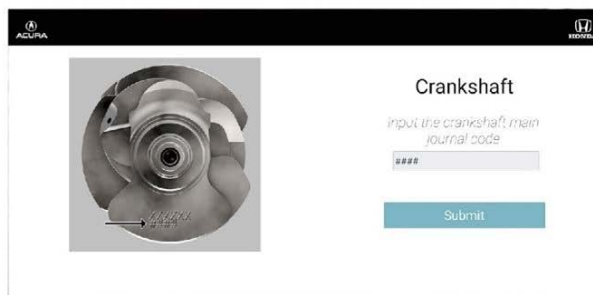

43. Take a picture of the code on the crankshaft counterweight with the V-SMART tool.

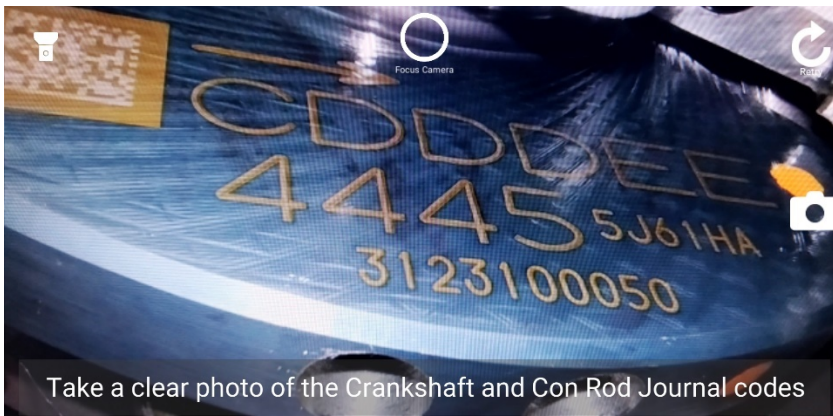


44. Reinstall the #1 main bearing cap.

NOTE:

- Apply new engine oil to the bolt threads and flanges.
- Do not rotate the crankshaft during inspection.


1. Torque the 2 vertical bolts to **40 N·m (30 lb-ft)**.
2. Torque the 2 horizontal bolts to **49 N·m (36 lb-ft)**.
3. Torque the 2 vertical bolts again an additional **47°**.

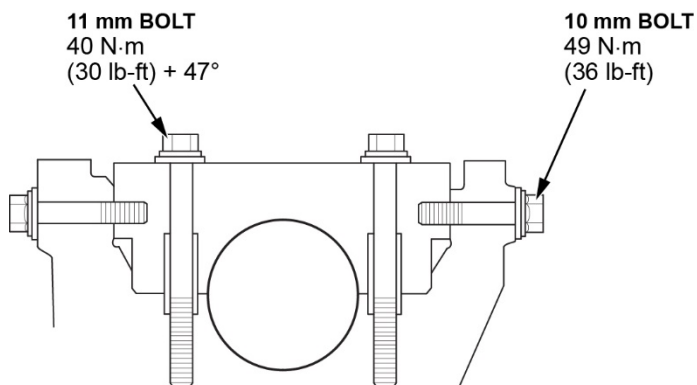

45. Clean and label each connecting rod cap with a paint marker (or otherwise suitable marking instrument) prior to removal. Make sure each rod cap has both the **cylinder #** and an **orientation arrow** pointing to the front of the vehicle.

NOTE:

- Do not confuse the existing marking on the side of the connecting rod and rod cap with the cylinder number. These are manufacturing marks referring to the size of the rod.
- Installing a rod cap incorrectly will result in engine knock and/or engine failure.

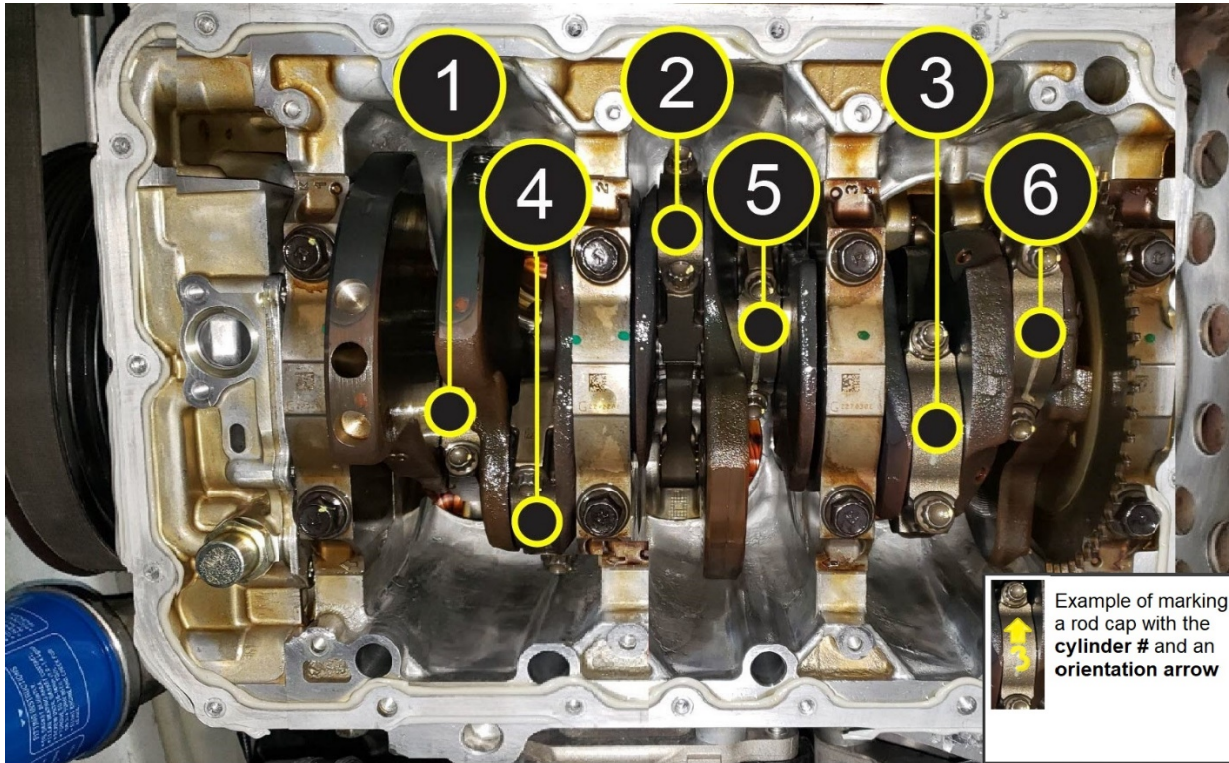


46. Make sure you are still logged into the V-SMART tool and follow the screen commands.

47. Rotate the engine to take pictures of all the connecting rod numbers.

1. Rotate crank 240° clockwise pictures of **connecting rods 1,4,5 and 6**. Enter the values and pictures into V-SMART as directed.
2. Rotate the crankshaft approximately 120° clockwise until the **cylinder 3** rod is visible. Enter the value and take a picture as directed by V-SMART.
3. Rotate the crankshaft approximately 120° clockwise until the **cylinder 2** rod is visible. Enter the value and take a picture as directed by V-SMART.
4. Rotate the crankshaft approximately 240° clockwise until cylinder 1 is back at TDC.


48. Confirm cylinder #1 is at top dead center (TDC). Align the pointer on the front upper cover with the No. 1 Piston TDC mark on the front camshaft pulley.

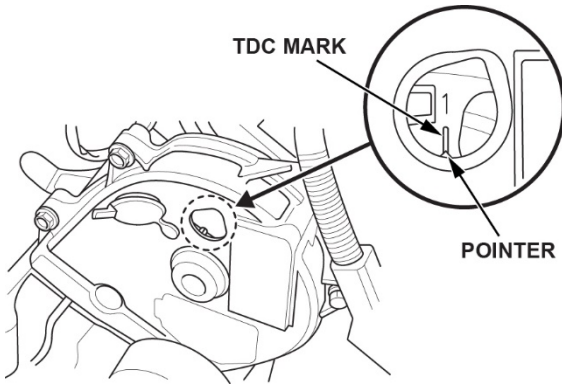

49. Install piston stoppers into cylinders 2,3,4, & 6.



PISTON STOPPER
P/N 07AAB-5G0200

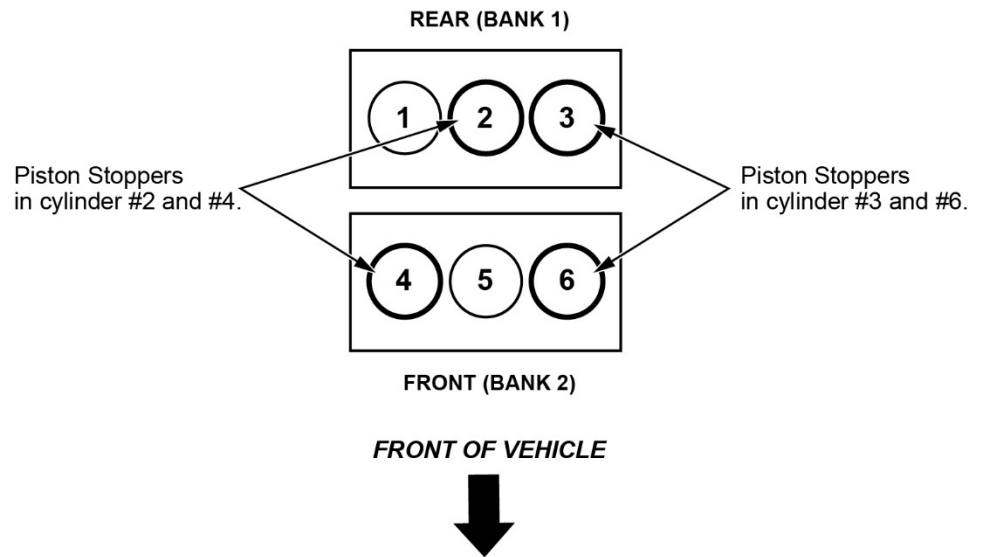

50. With cylinder 1 at TDC, mark the crankshaft pulley with a vertical line at the 6 o'clock position.



CRANKSHAFT PULLEY
Mark with a vertical line
from the 6 o'clock position.

51. Attach the crank angle gauge to the crankshaft pulley with position #1 correctly aligned at the 6 o'clock position.



Click here to view video:



CRANK ANGLE GAUGE
P/N 07AAJ-5G0A100

52. Attach a large, commercially available zip tie to the subframe below the crankshaft pulley. The zip tie will be a **reference indicator** for a correct timing wheel position.


NOTE:

- Make sure it is pointing up at the 6 o'clock position on the pulley.
- The zip tie should extend roughly 8" to 12" over the subframe.



ZIP TIE
Attach a zip tie to the frame and line up as shown.

53. Make sure the Bearing Photo Box (Tool Number: 07AAK-5J2A200) and inspection tray are available for use.

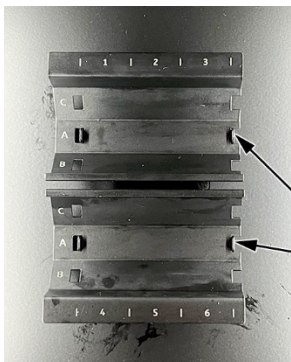

BEARING PHOTO BOX
INSPECTION TRAY



54. Make sure the **cylinder 1** is at TDC (**position #1**).



55. Remove the **connecting rod bearing cap and lower bearing** for **cylinders 1,3,5, and 6**.

Step/Crankshaft Position	Cylinder 1 Bearing Cap and Lower Bearings	Cylinder 3 Bearing Cap and Lower Bearings	Cylinder 5 Bearing Cap and Lower Bearings	Cylinder 6 Bearing Cap and Lower Bearings
#1/At TDC	Remove	Remove	Remove	Remove

Click here to view video:




NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**


56. Place the removed lower bearings from **cylinders 1,3,5, and 6** into the inspection tray.

NOTE:

- Thoroughly clean the bearings with a clean shop towel prior to placing the bearing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing arrangement** in the tray **does not matter**.

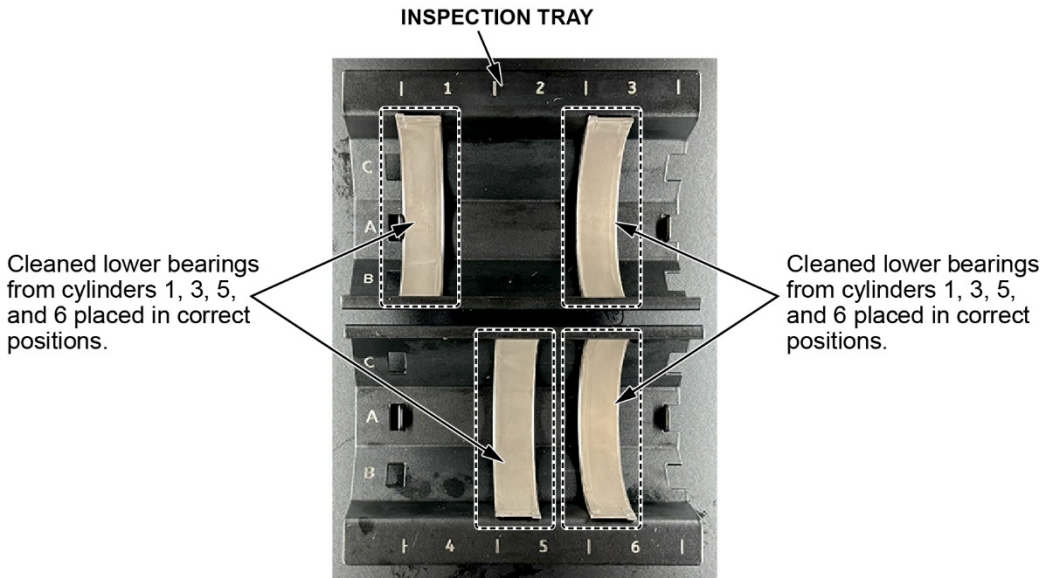

57. Rotate the crankshaft clockwise to the **#2 position** (TDC +45°).

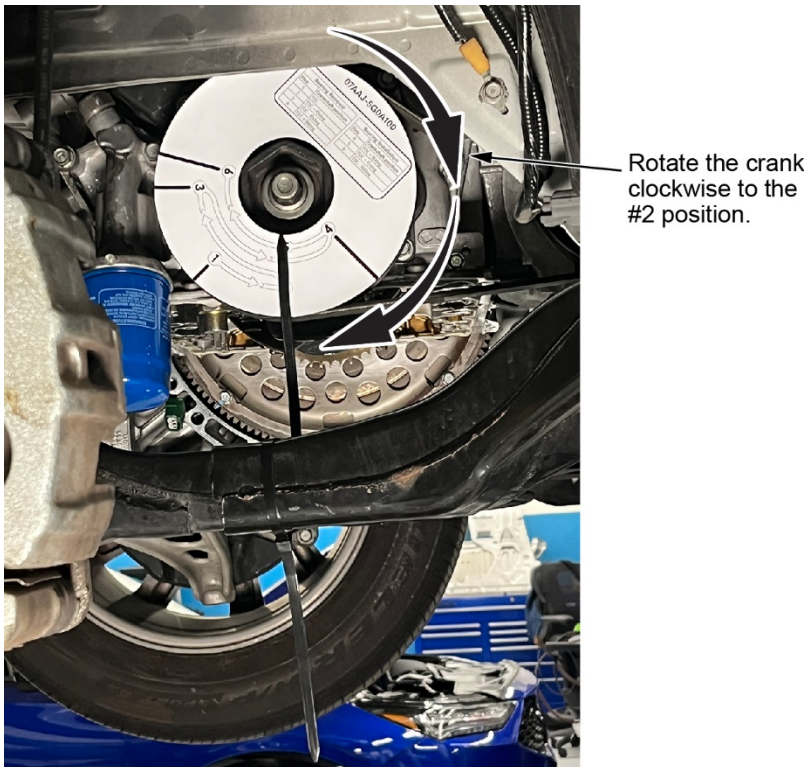

58. Remove the **rod bearing cap and lower bearing** from **cylinder 2**.

Step/Crankshaft Position	Cylinder 2 Bearing Cap and Lower Bearings
#2/TDC +45°	Remove


NOTE:

- Follow the removal of the connecting rod bearing steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not** use any solvents.

59. Place the removed lower bearing from **cylinder 2** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

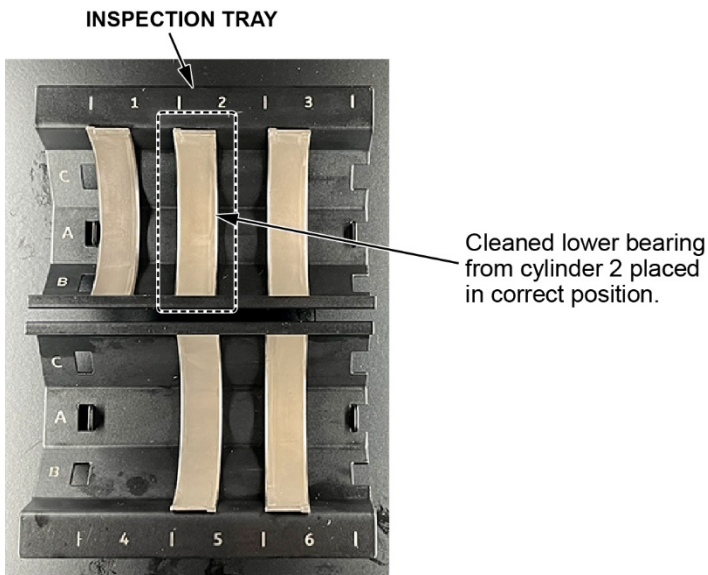

60. Remove the **cylinder 2 upper connecting rod bearing**.

Step/Crankshaft Position	Cylinder 2 Upper Bearing
#2/TDC +45°	Remove

Click here to view video:




M8 ROD HOLDER
P/N 07AAB-5G0A100



NOTE:

- Follow the removal of the connecting rod bearing steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**

EXAMPLE OF USING THE M8 ROD HOLDER TOOL

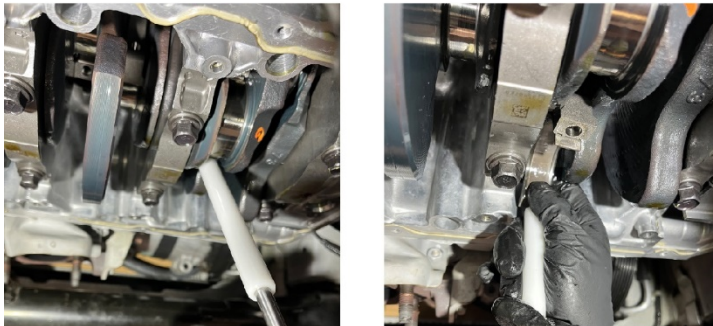


1. Thread the M8 rod holder tool into the connecting rod bolt hole.
2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
5. Using the M8 rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
6. Remove the M8 rod holder tool.
7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use any solvents.**

61. Place the removed **upper bearing** from **cylinder 2** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

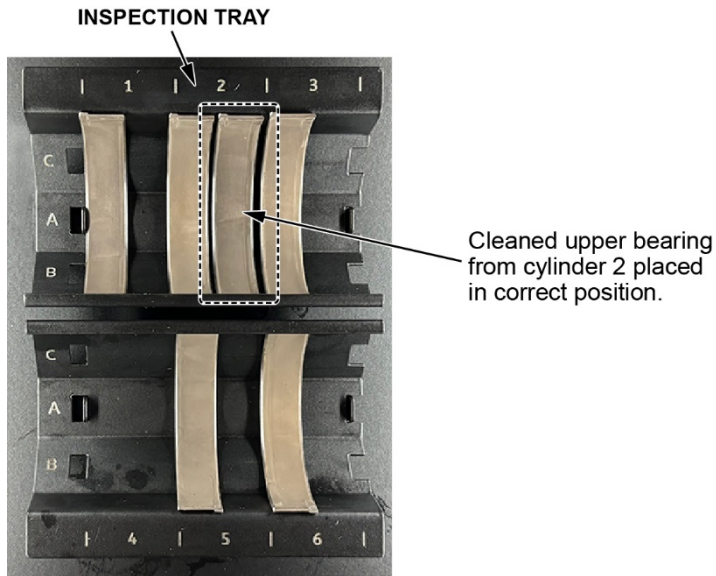

62. Rotate the crankshaft counterclockwise to the **#3 position** (TDC -45°).

Rotate the crank counterclockwise to the #3 position.



63. Remove the **rod bearing cap and lower bearing** from **cylinder 4**.

Step/Crankshaft Position	Cylinder 4 Rod Cap and Lower Bearing
#3/TDC -45°	Remove


NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
- The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
- Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**

64. Place the removed **lower bearing** from **cylinder 4** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing** arrangement in the tray **does not matter**.

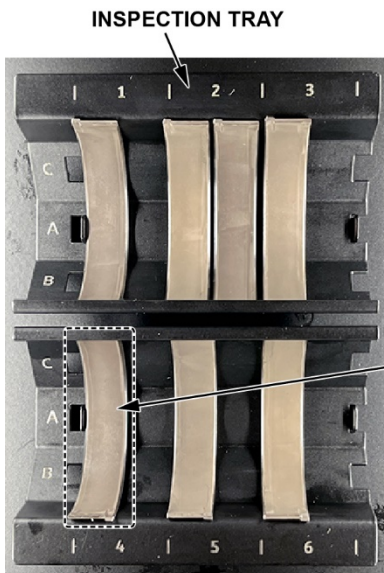

Cleaned lower bearing from cylinder 4 placed in correct position.

65. Remove the **cylinder 3 upper connecting rod bearing**.

Step/Crankshaft Position	Cylinder 3 Upper Bearing	Cylinder 4 Upper Bearing
#3/TDC -45°	Remove	Remove

NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
 - The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
 - Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**
1. Thread the rod holder tool into the connecting rod bolt hole.
 2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
 3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
 4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
 5. Using the M8 rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
 6. Remove the M8 rod holder tool.
 7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use any solvents.**


66. Remove the **cylinder 4 upper connecting rod bearing**.

1. Thread the rod holder tool into the connecting rod bolt hole.
2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
5. Leave the **cylinder 4** connecting rod in the lower position, **do not** push back up.
6. Remove the M8 rod holder tool.
7. Thoroughly clean the bearing with a clean shop towel to remove all oil residue. **Do not use any solvents.**


67. Place the removed **upper bearings** from **cylinder 3 and 4** into the inspection tray.

NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing arrangement** in the tray **does not matter**.

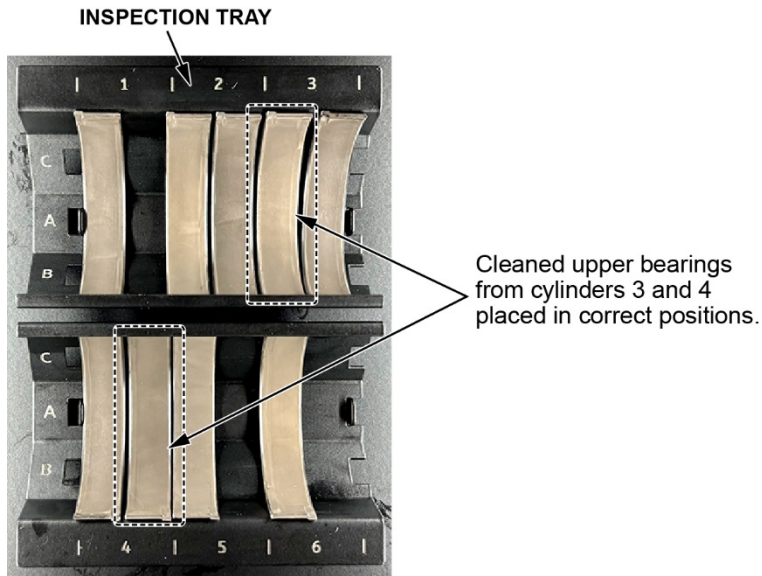

68. Rotate the crankshaft clockwise to the **#4 position** (TDC +90°).

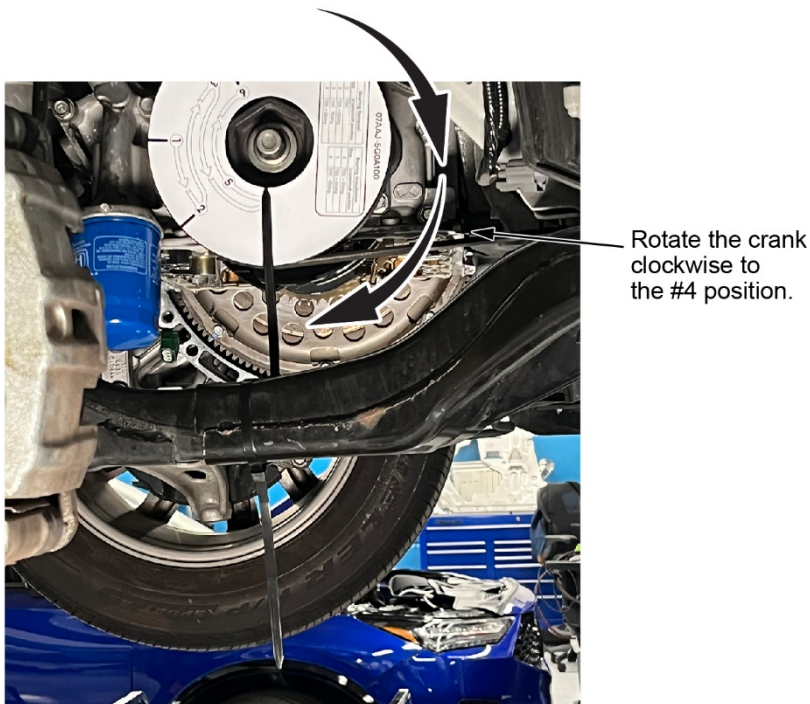

69. Remove the **upper bearing from cylinders 1, 5, and 6.**

Step/Crankshaft Position	Cylinder 1 Upper Bearing	Cylinder 5 Upper Bearing	Cylinder 6 Upper Bearing
#4/TDC +90°	Remove	Remove	Remove


NOTE:

- Follow the removal of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.
 - The next steps involve manually moving the piston/rod assemblies while disconnected from the crankshaft. Moving the piston/rod assembly too far in either direction can damage the piston and/or oil jet.
 - Thoroughly clean the bearing with a clean shop towel after removal. No oil should be present. **Do not use any solvents.**
 - Use the rod holder tool as necessary, hand tighten only.
1. Thread the rod holder tool into the connecting rod bolt hole.
 2. Carefully push the connecting rod up until the connecting rod clears the crankshaft journal.
 3. Swing the connecting rod to the side, then pull down just enough to gain access to the upper bearing.
 4. Remove the upper bearing by sliding it to the side until it releases from the connecting rod.
 5. Using the rod holder tool, carefully push the connecting rod back up until it contacts the piston stopper.
 6. Remove the rod holder tool.
 7. Thoroughly clean the bearings with a clean shop towel to remove all oil residue. **Do not use any solvents.**

70. Place the removed **upper bearings from cylinders 1, 5, and 6** into the inspection tray.


NOTE:

- Thoroughly clean the bearing with a clean shop towel prior to placing in the inspection tray. No oil should be present. **Do not use any solvents.**
- **Place** the removed bearings into the inspection tray at the correct position. For example, the **cylinder 1 bearings** should be in the **#1 slot** in the **tray**. **Upper and lower bearing arrangement in the tray does not matter.**

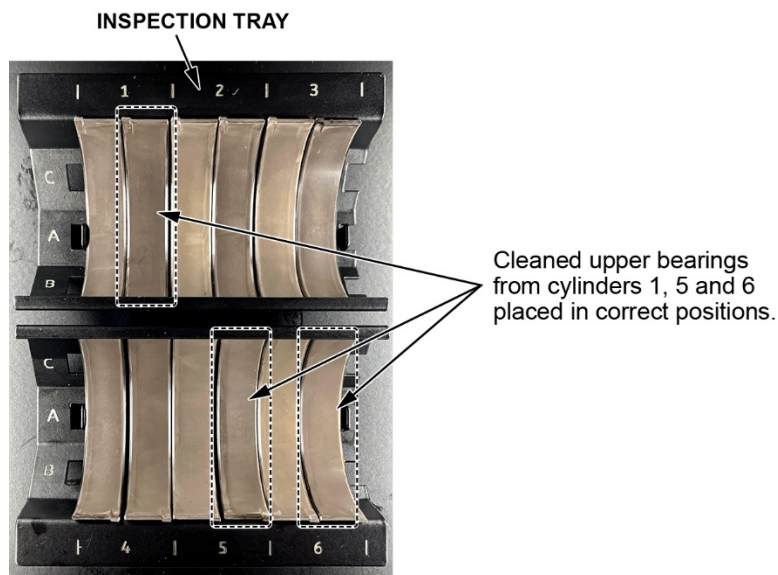


71. Make sure the bearings are fully seated and level with the edge of the inspection tray.

- The bearing's indexing tab should be lined up at the numbers.
- The flat edge of the bearing should be inside the lip.
- All bearings should be fully seated.

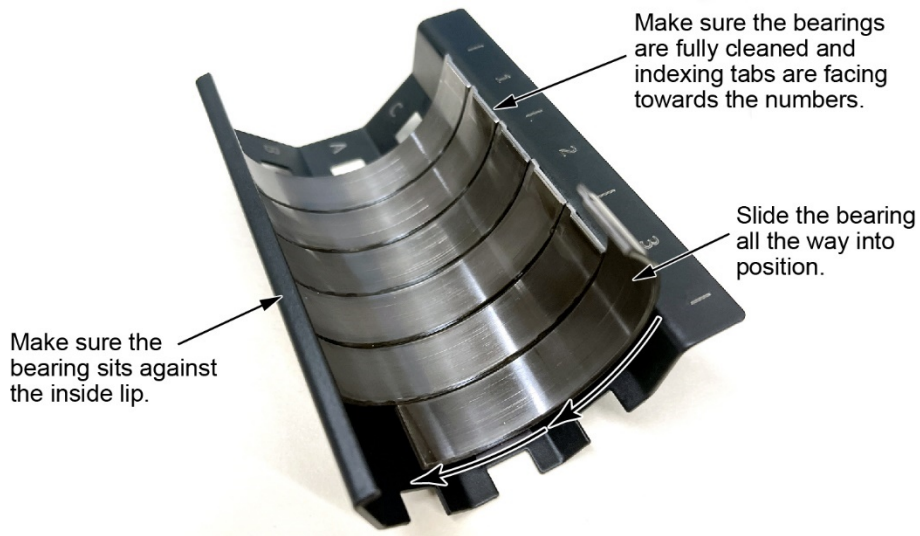

72. Remove the photo box cover and place the inspection trays into the bearing photo box.

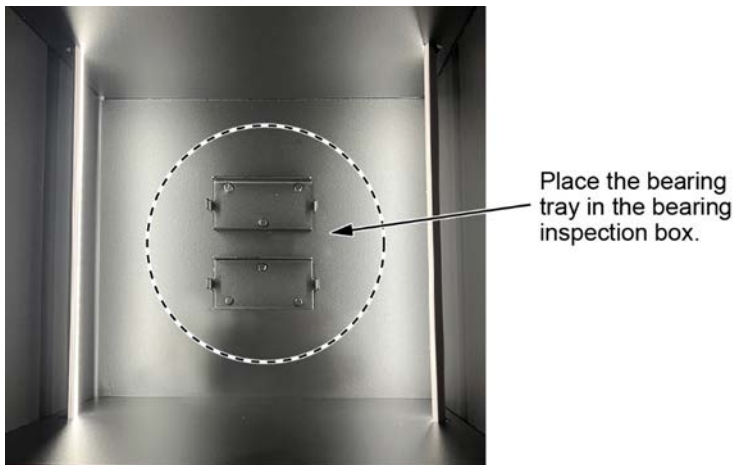


73. Confirm the following is ready on the bearing photo box:

1. Lights at the brightest setting.

NOTE: The lighting can be adjusted with a long hold on the button.

2. Both bearing trays in position A with non-numbered sides facing each other.
3. The O-rings are set on the lights to prevent an outside light source.

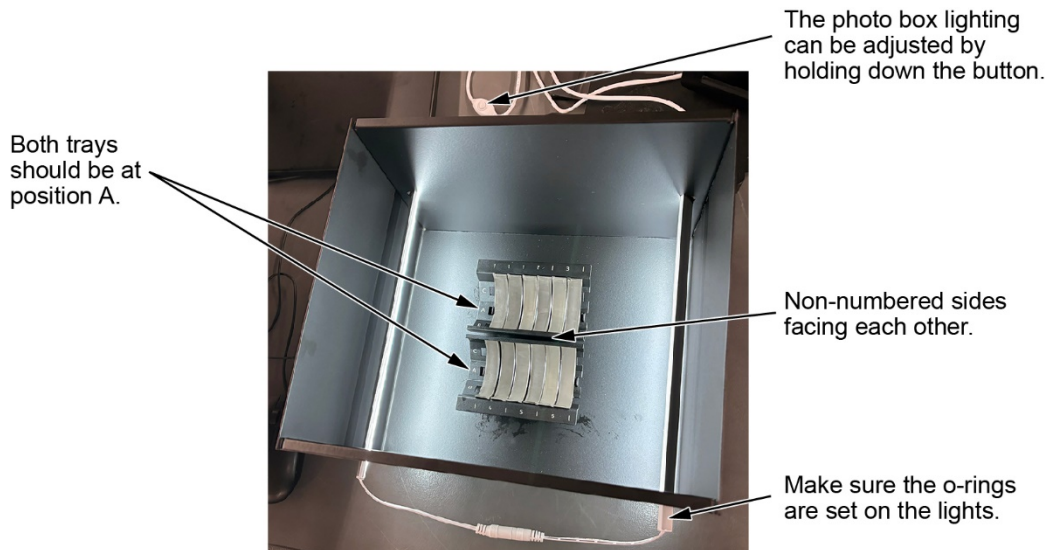

74. Login to the V-SMART application.

NOTE: Scanning the VIN will return to where you left off.

75. Using the V-SMART application, follow the instructions on the application to take bearing photos in positions A, B, and C. Follow the prompts when submitting the photos.

NOTE:

- Use the camera tap focus for a clear image.
- Any unclear images will not be accepted.
- Follow the V-SMART tool prompts after photo submission.




When taking the photos:

Tap here to focus camera.




76. Create a Bearing Inspection Inquiry.

1. Log into iN.
2. Select **SERVICE > REMAN PARTS / SPECIAL ORDERS > BEARING INSPECTION INQUIRY.**
3. Select the **BEARING INSPECTION INQUIRY.**
4. Input the correct VIN.

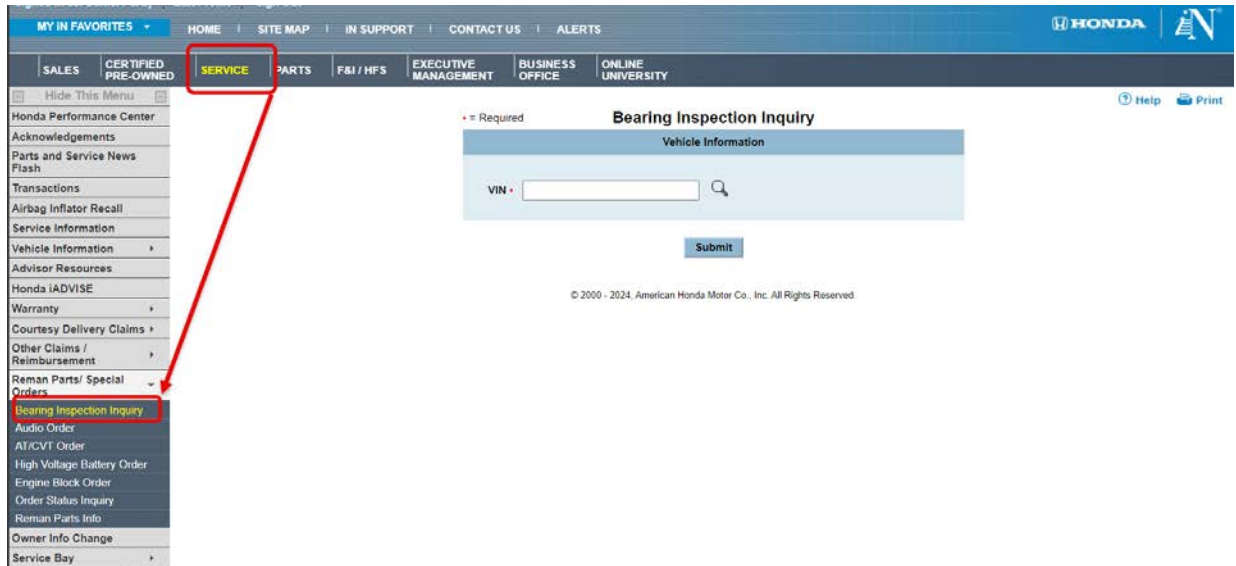

5. Input all vehicle information (including the correct VIN) to create a case.

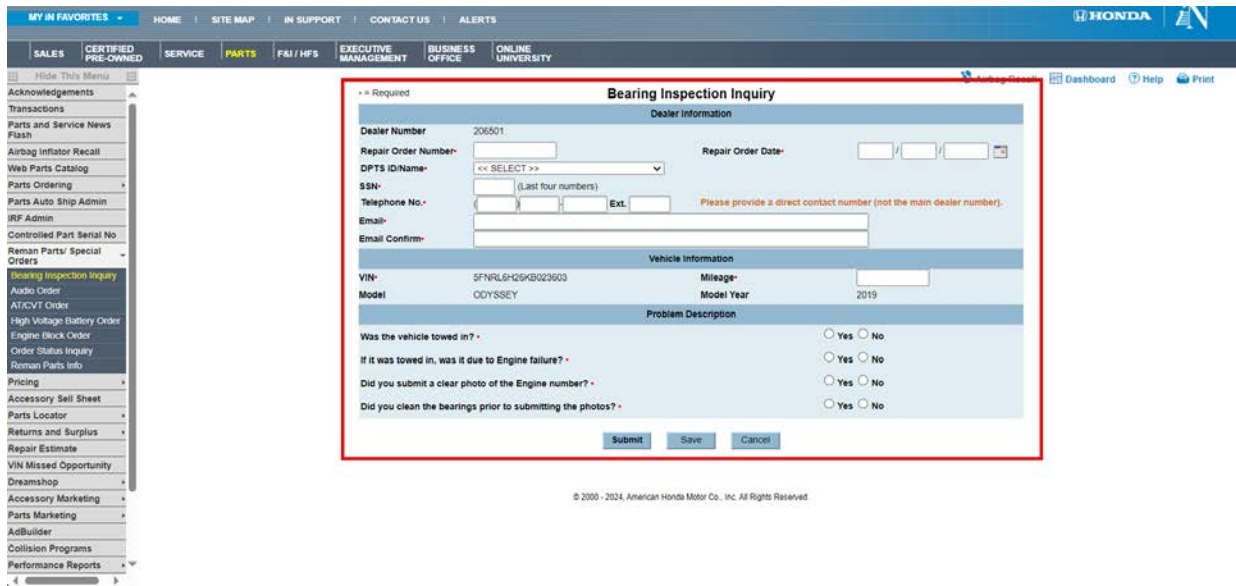

77. A 7-digit case reference number will be generated.

78. Call the **Bearing Inspection Inquiry Team** at **(800) 824-6632**. Press **9** to be routed to the correct department (**do not contact TECH LINE for this**). Give the answering agent the **7-digit reference number** for repair direction.

NOTE: MAKING THE INCORRECT SELECTION WILL RESULT IN INCREASED WAIT TIMES.

79. The bearing inspection agent will give the **Repair Direction**. You will receive instructions via email on the repair method that includes the unique warranty code and the bearing sizes with their specific locations, if applicable. Parts will be AUTO shipped to your dealership. Make sure to advise the parts department with a copy of the RO.

NOTE: Link to CONTENT REFERENCE, ([Click HERE](#)).

REPAIR #1 INSTALL RECOMMENDED BEARINGS

NOTE: DO NOT contact Tech Line for any inquiries to this safety recall. You must call the Bearing Inspection Inquiry Team at (800) 824-6632 (**Select Option #9**) for all inquiries and repair direction.

1. Follow the **Repair Type** instructions on the emailed Bearing Selection Results sheet. Make sure the VIN sheet matches the vehicle.

NOTE:

- Follow the **Repair Type** instructions exactly as recommended.
- Use the **Warranty Verification Code** for the warranty claim.




Bearing Inspection Repair Direction

Date: 2024-02-01
Time: 18:32
Page: 1

Car Information:

Case #: 1234567	VIN: [REDACTED]	Exterior Color: SLATE SILVER METALLIC
Dealer #: 1234567	EIN: [REDACTED]	Interior Color: EBONY SLATE SILVER METALLIC
	Model: [REDACTED]	Year: 2015

Warranty Verification Code: [REDACTED]
Failed Part Number: [REDACTED]
Repair Type: Rod Bearings
Bearing Information:

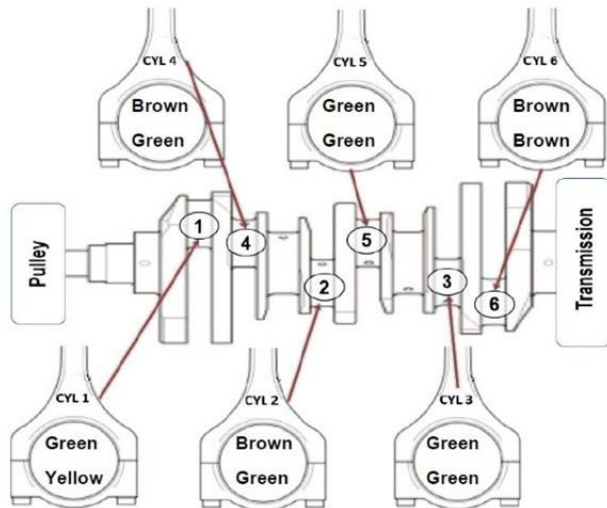


2. Inspect the connecting rod bolts:

- Measure the diameter of each connecting rod bolt at point A and point B.
- Calculate the difference in diameter between point A and point B.

Difference in diameter specification: 0–0.1 mm (0–0.004 in)

- If the difference in diameter is out of tolerance, replace the connecting rod bolt.

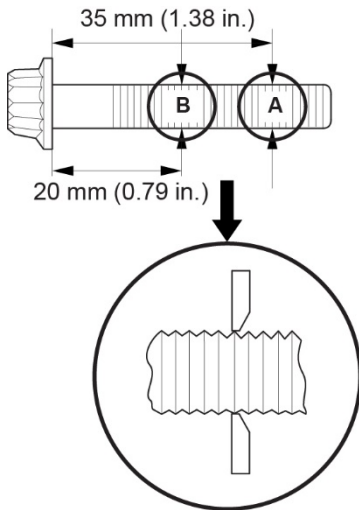


3. Apply a light coating of oil to all connecting rod journals.

4. While the crankshaft is still at crank angle gauge **position #4** (TDC +90°), install the **upper bearing** to the connecting rod for **cylinders 1, 5, and 6**.

NOTE:

- Make sure the bearing indexing tabs are properly oriented during installation.
- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

Step/Crankshaft Position	Cylinder 1 Upper bearings	Cylinder 5 Upper bearings	Cylinder 6 Upper bearings
#4/TDC +90°	Install	Install	Install

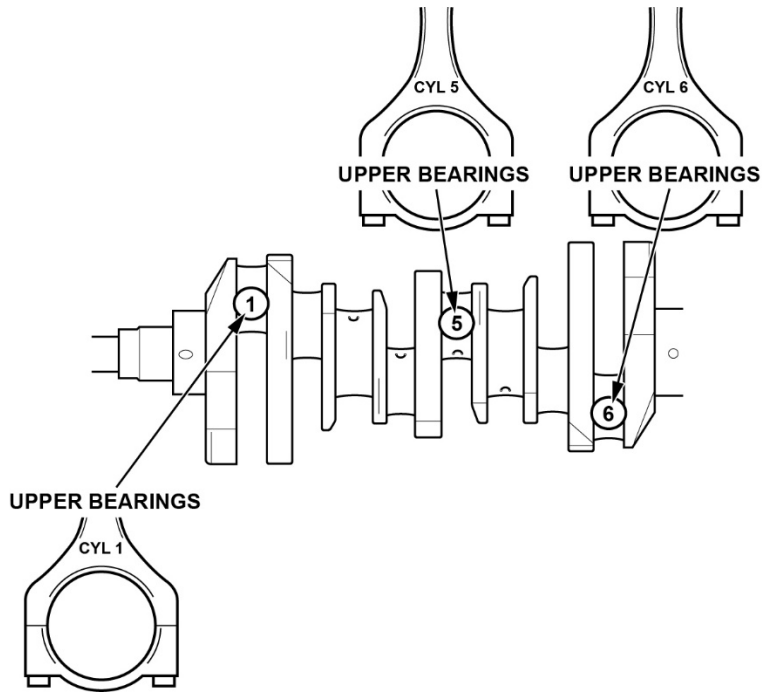


5. Install the connecting rod cap and lower bearing to the connecting rod for cylinder 5.

NOTE:


- Make sure the bearing indexing tabs are properly oriented during installation.
- Apply new engine oil to the bolt threads and bolt flanges.
- If you tightened the connecting rod bolt beyond the specified angle, remove and inspect the connecting rod bolt. Do not loosen it back to the specified angle.
- Use a commercially available torque angle meter.
- Use the M8 Rod Holder tool as needed, this includes resting against the journal as a guide.
- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

Step/Crankshaft Position	Cylinder 5 Rod Cap and Lower Bearing
#4/TDC +90°	Install

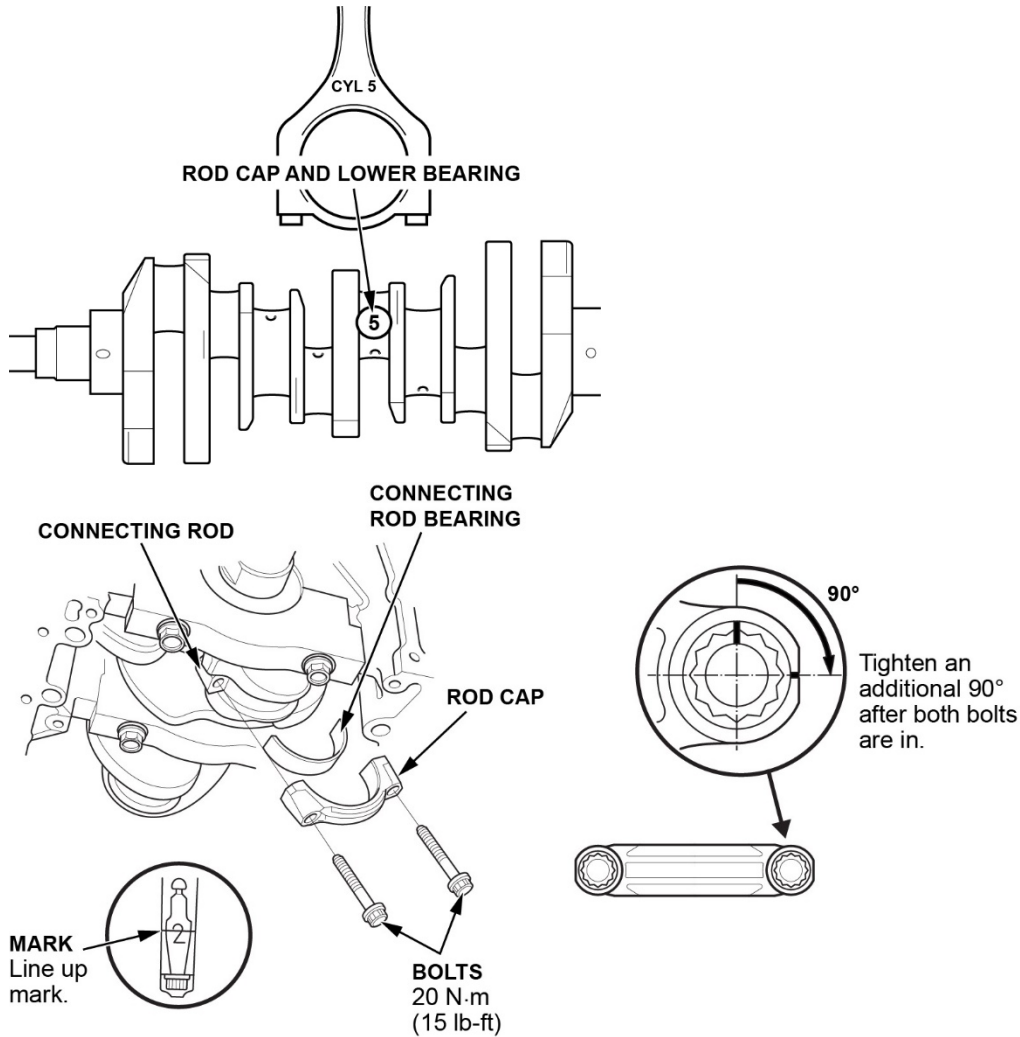

6. Rotate the crankshaft counterclockwise to crank angle gauge **position #5** (TDC +45°).


Rotate the crank counter-clockwise to the #5 position.

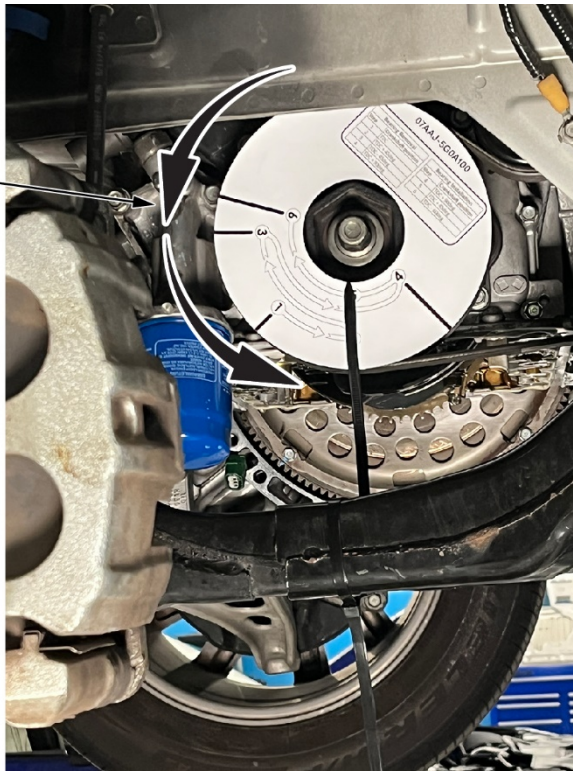

7. Install the **upper bearing** to the connecting rod for **cylinder 2**.

Step/Crankshaft Position	Cylinder 2 Upper Bearings
#5/TDC +45°	Install

- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

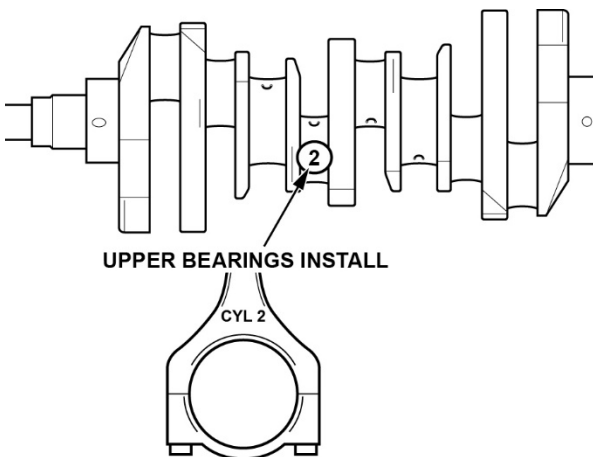


8. Without moving the crank, install the **rod cap and lower bearing** to the connecting rod **for cylinders 2 and 6**.

NOTE:

- Make sure the bearing indexing tabs are properly oriented during installation.
- Apply new engine oil to the bolt threads and bolt flanges.
- If you tightened the connecting rod bolt beyond the specified angle, remove and inspect the connecting rod bolt. Do not loosen it back to the specified angle.
- Use a commercially available torque angle meter.
- Use the M8 Rod Holder tool as needed, this includes resting against the journal or otherwise.
- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

Step/Crankshaft Position	Cylinder 2 Rod Cap and Lower Bearings	Cylinder 6 Rod Cap and Lower Bearings
#5/TDC +45°	Install	Install

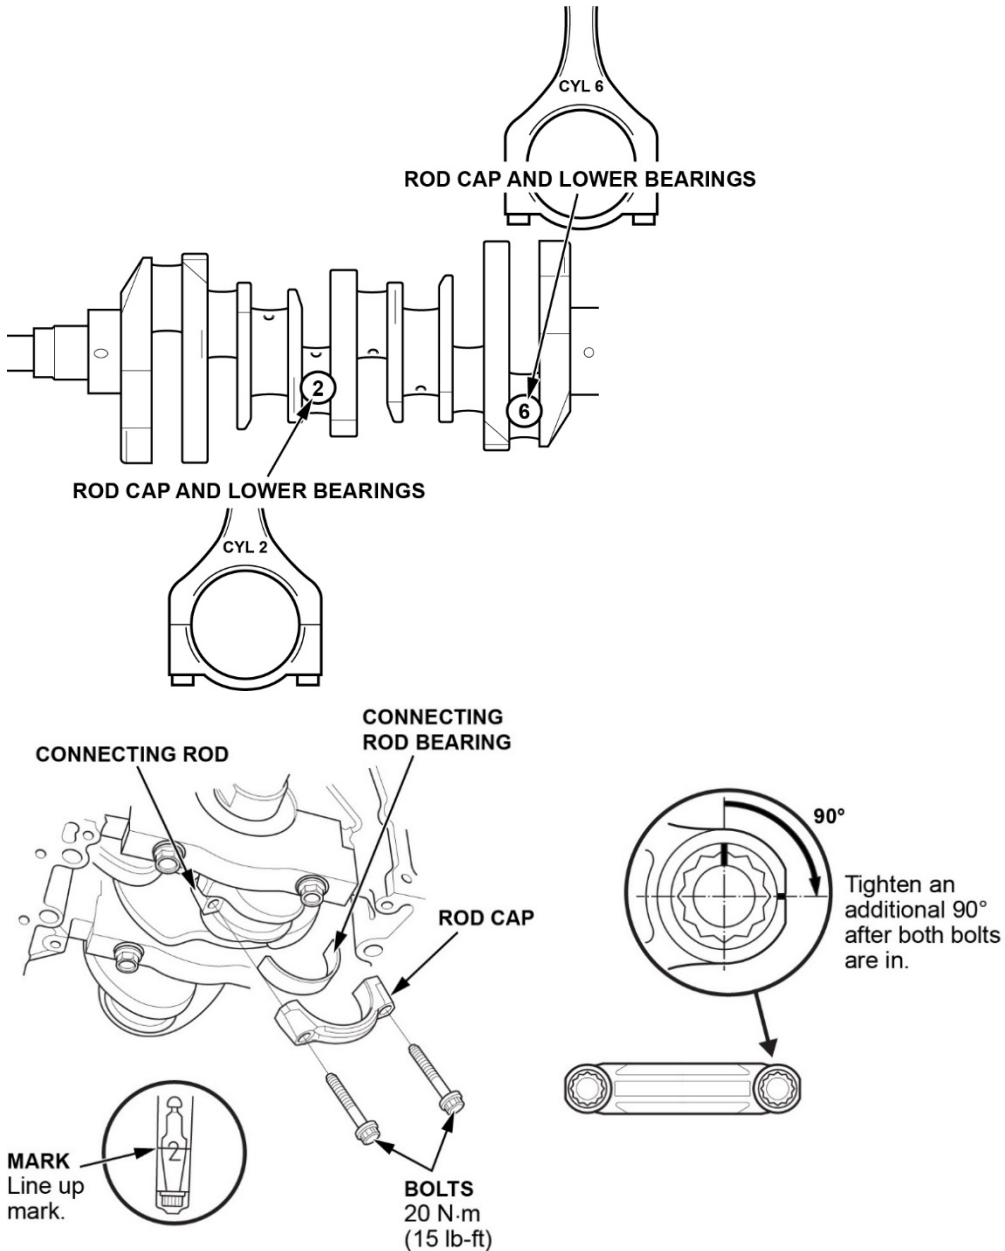

9. Rotate the crankshaft counterclockwise to crank angle gauge **position #6** (TDC -60°).


Rotate the crank counterclockwise to the #6 position.



10. Install the **upper bearings** to the connecting rods for **cylinders 3 and 4**.

Step/Crankshaft Position	Cylinder 3 Upper Bearings	Cylinder 4 Upper Bearings
#6/TDC -60°	Install	Install


- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

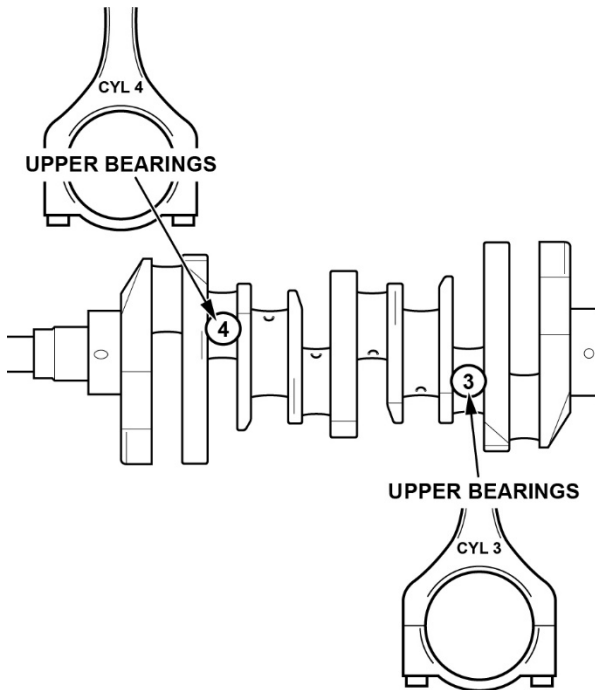

11. Without rotating the crank, install the **rod caps and lower bearings** to the connecting rod **for cylinders 1, 3, and 4**.


- Make sure the bearing indexing tabs are properly oriented during installation.
- Apply new engine oil to the bolt threads and bolt flanges.
- If you tightened the connecting rod bolt beyond the specified angle, remove and inspect the connecting rod bolt. Do not loosen it back to the specified angle.
- Use a commercially available torque angle meter.
- Use the M8 Rod Holder tool as needed, this includes resting against the journal or otherwise.
- Follow the install of the connecting rod steps precisely to prevent damage to the crank journal and connecting rods.

Step/Crankshaft Position	Cylinder 1 Rod Cap and Lower Bearings	Cylinder 3 Rod Cap and Lower Bearings	Cylinder 4 Rod Cap and Lower Bearings
#6/TDC -60°	Install	Install	Install

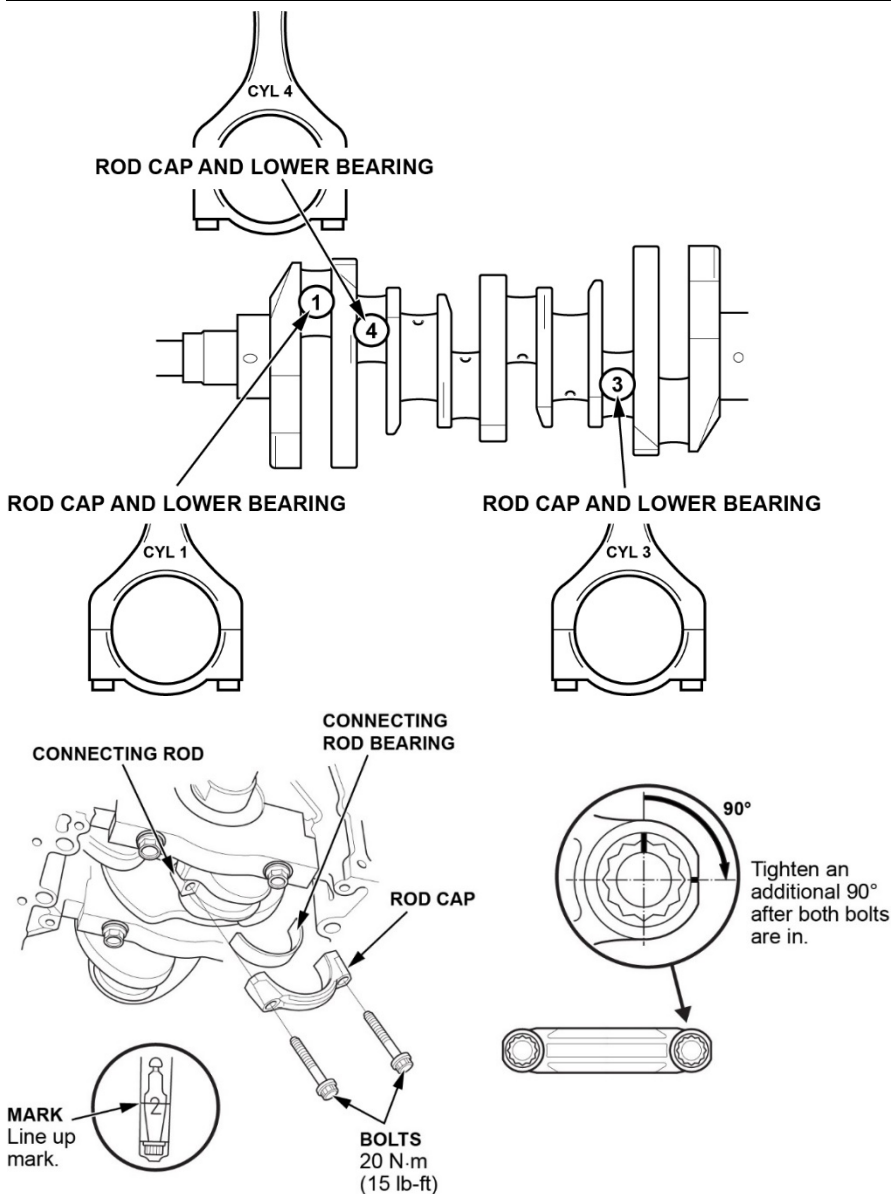


12. Remove the crank angle gauge and zip tie.

13. Lower the vehicle and remove the piston stoppers.

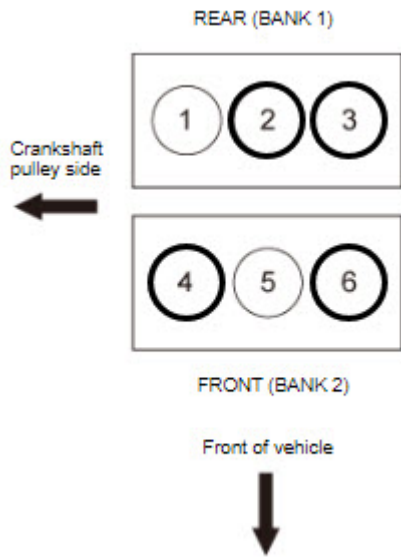


14. Raise the vehicle.

15. Rotate the crankshaft **360 degrees** to check for binding of rod bearings.

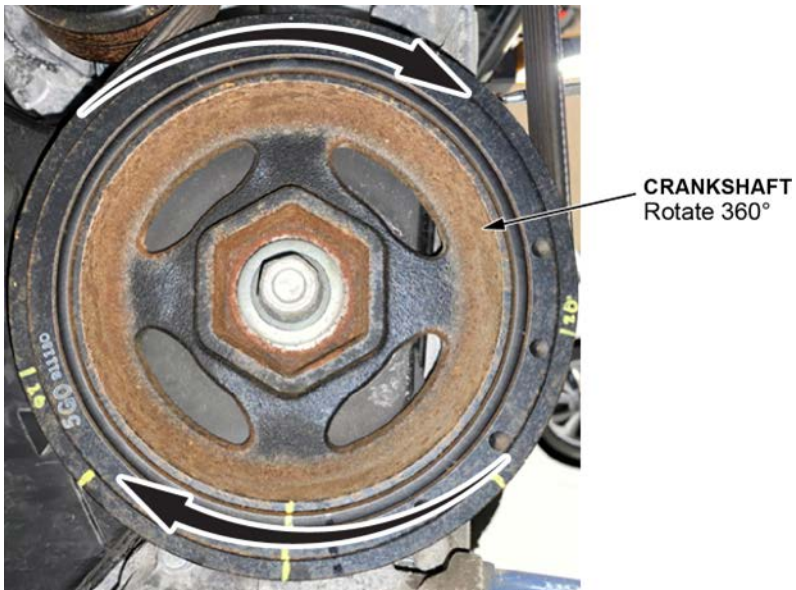

16. Install the baffle plate and oil strainer.

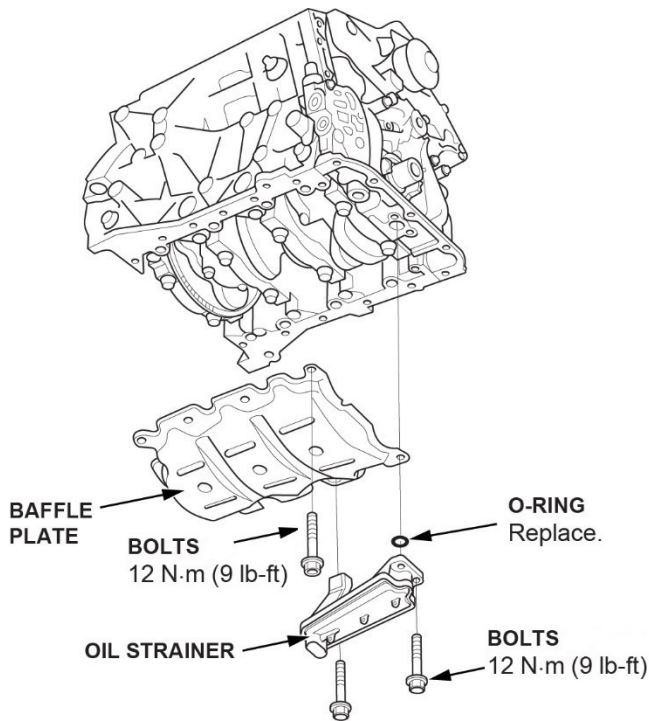


17. Install the engine oil pan.

1. Remove all of the old liquid gasket from the oil pan mating surfaces, the bolts, and the bolt holes.
2. Clean and dry the oil pan mating surfaces.
3. Apply liquid gasket to the oil pan mating surface of the engine block and to the inside edge of the threaded bolt holes. Install the component within 5 minutes of applying the liquid gasket.

NOTE: If too much time has passed after applying the liquid gasket, remove the old liquid gasket and residue, then reapply new liquid gasket.


4. Install the dowel pins.
5. Install the oil pan.

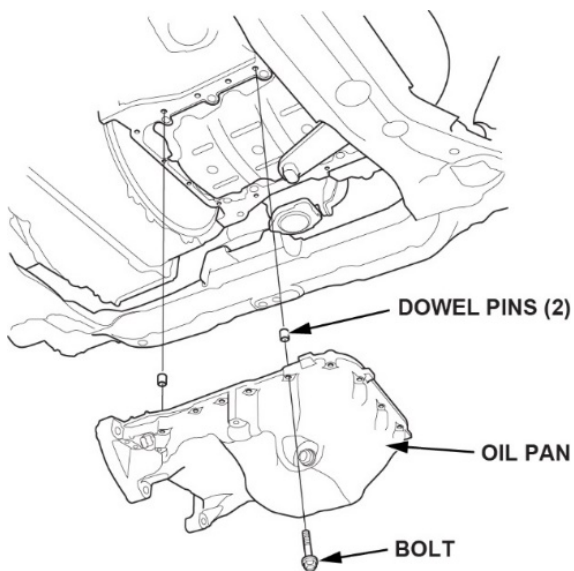


18. Tighten the bolts in **three steps**; tighten the bolts until the bolts sit on the oil pan, tighten the bolts until the gasket is compressed, torque the bolts to **12 N·m (9 lb-ft)**. Follow the sequence shown.

NOTE:


- Wait at least **30 minutes** before filling the engine with oil.
- Do not run the engine for at least **3 hours** after installing the oil pan.

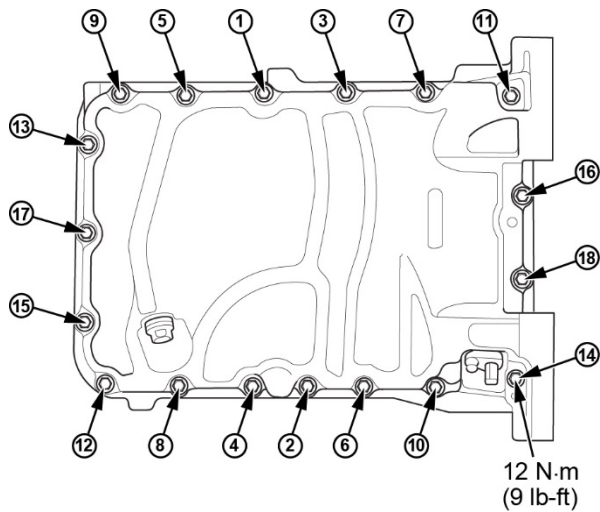

19. Install the lower transmission assembly mounting bolts and torque to **75 N·m (55 lb-ft)**, then install the torque converter cover and torque to **12 N·m (9 lb-ft)**.

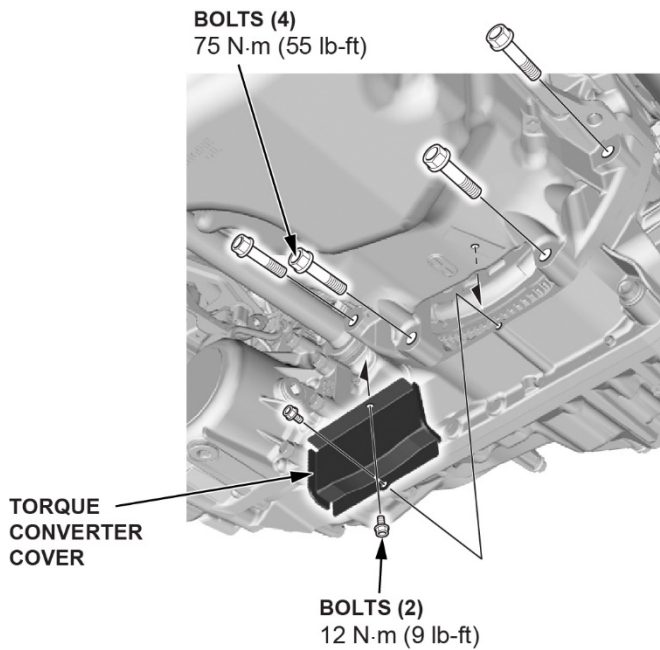


20. **INSPECTION B ONLY:** Install the A/C compressor bracket.

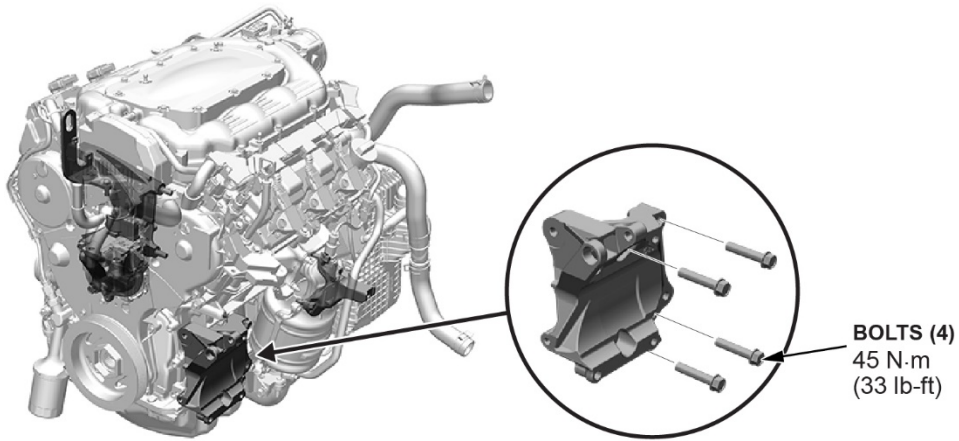


21. Lower the vehicle

22. **INSPECTION B ONLY:** Install the A/C compressor with the upper mounting bolts.

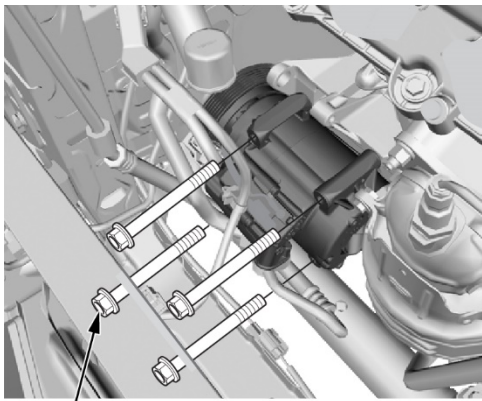


BOLTS (4)
22 N·m (16 lb-ft)

23. **INSPECTION B ONLY:** Remove the radiator shield.

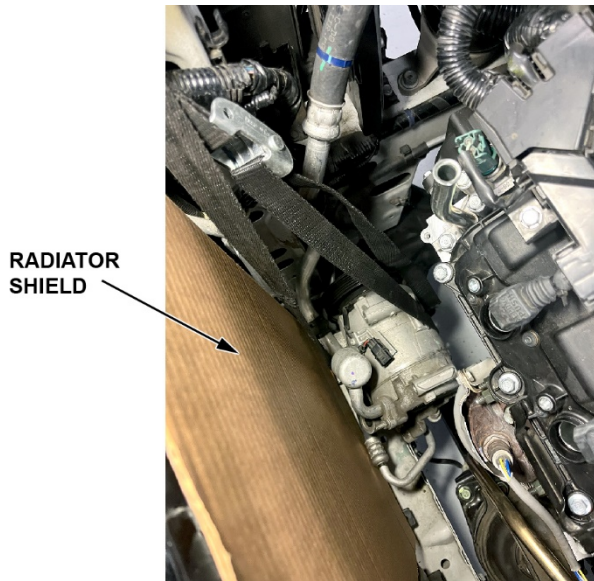


24. **INSPECTION B ONLY:** Install the alternator.


1. Install the alternator to the alternator bracket.

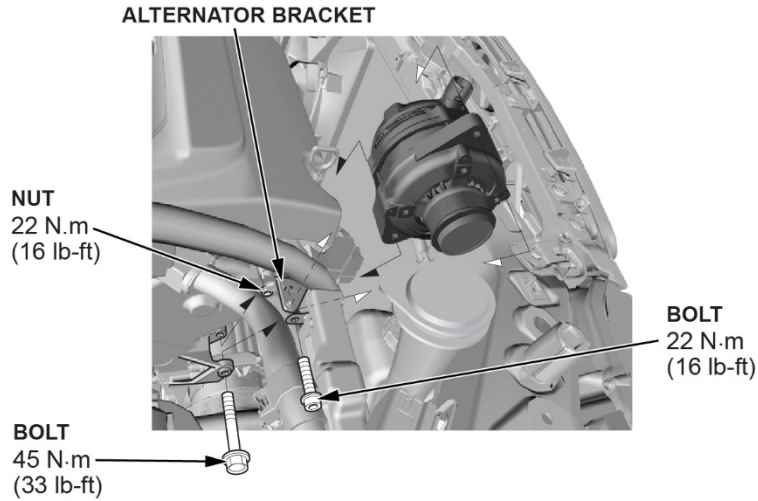

25. **INSPECTION B ONLY:** Connect the A/C compressor clutch connector, the alternator connector, and the positive alternator cable. Then install the harness clamp and bolt.

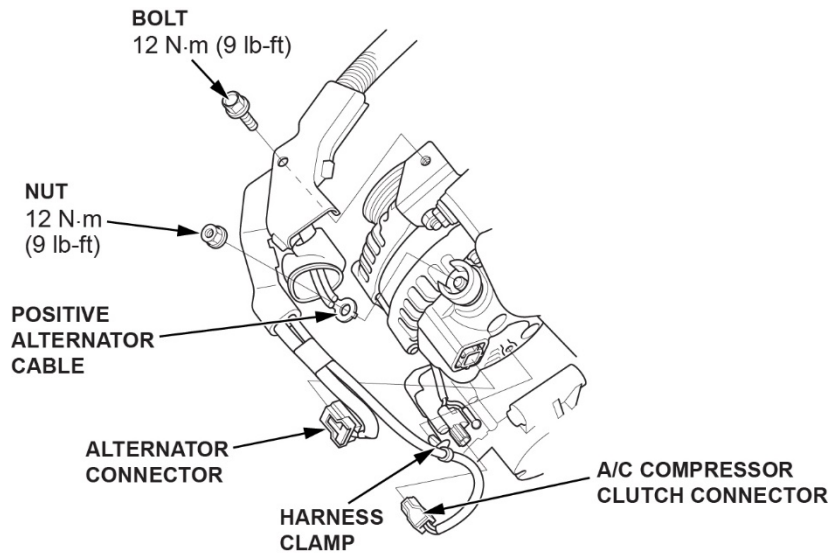


26. **INSPECTION B ONLY:** Install the condenser fan and reconnect the wiring.

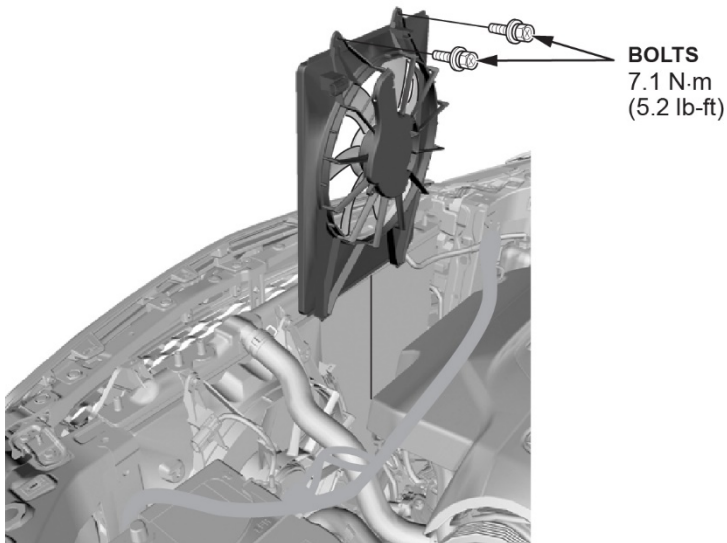


27. **INSPECTION B ONLY:** Install the passenger's side bulkhead brace and upper bolt.

LOOKING DOWN FROM UNDER HOOD

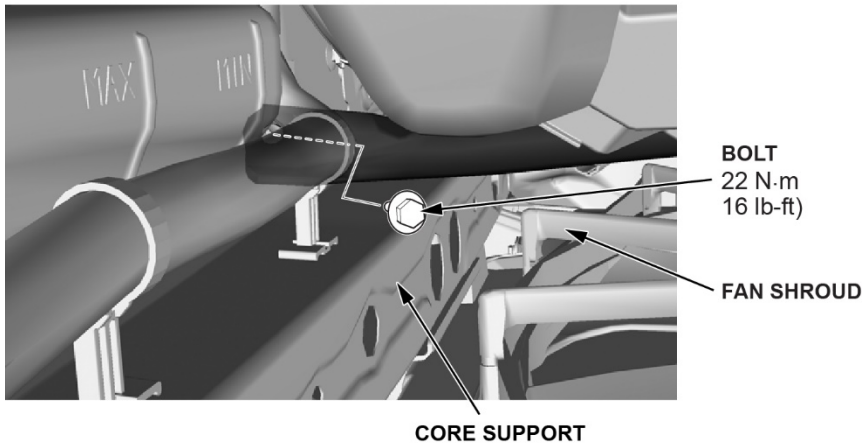


28. **INSPECTION B ONLY:** Install the bulkhead.

14 – 16 MY SHOWN

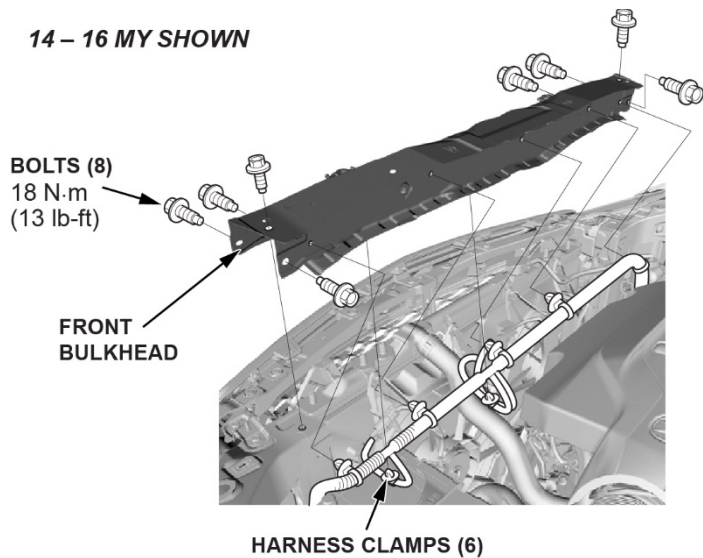


29. Raise the vehicle.


30. Reconnect the CKP sensor, then install the CKP sensor cover, **12 N·m (9 lb-ft)**.

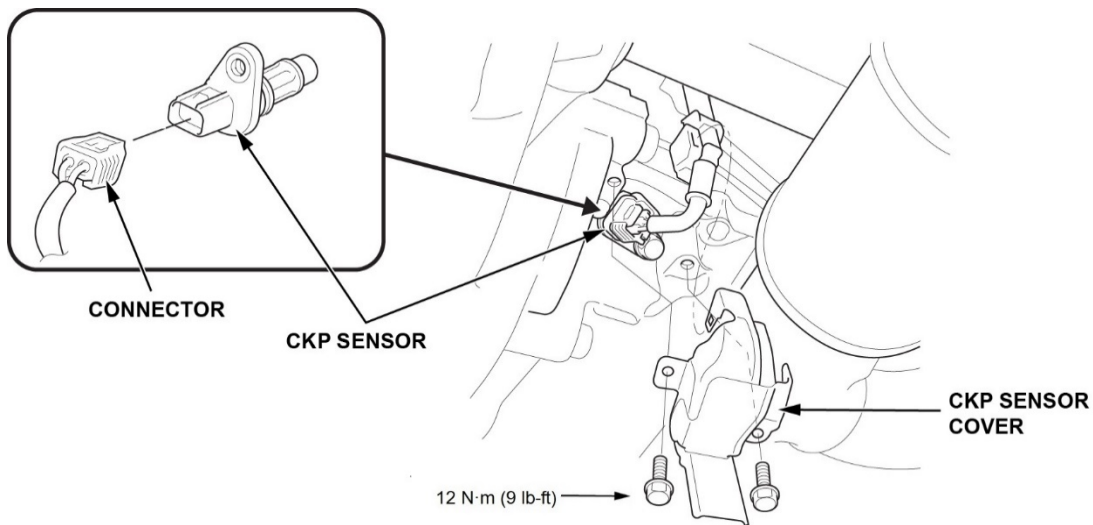


31. Install the under-floor TWC (A-pipe).

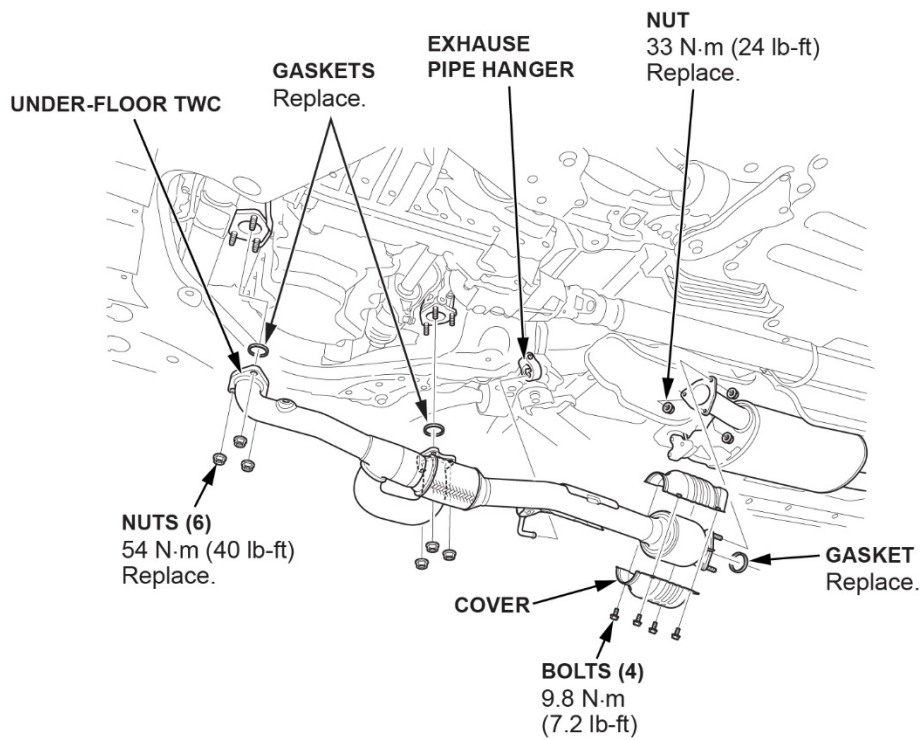


32. Install the subframe stiffener plate.

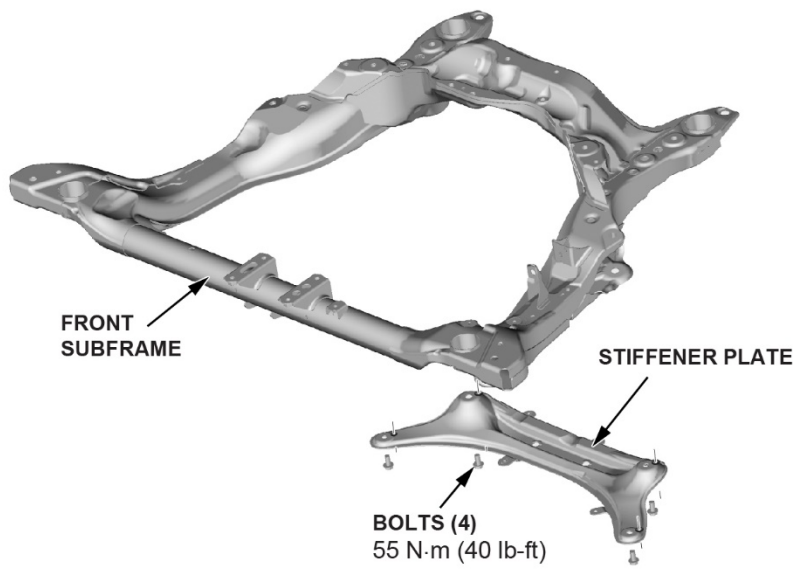


33. Reconnect the bank 2 oxygen sensor.

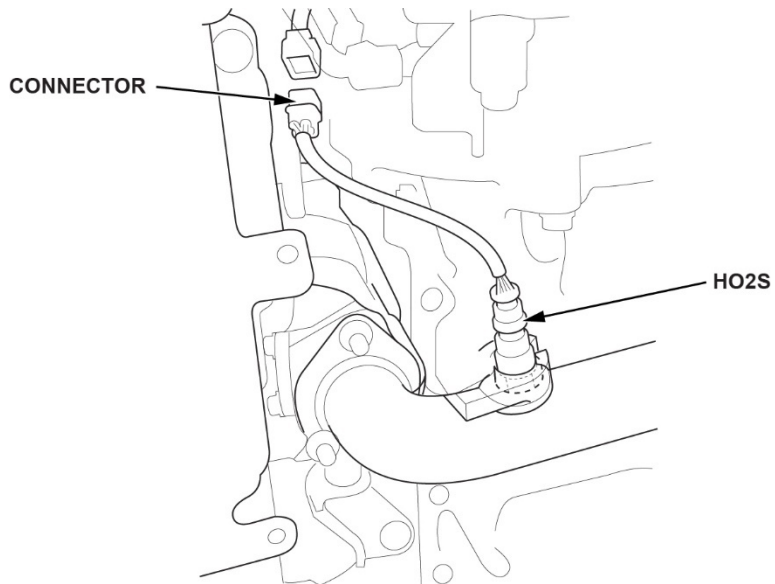


34. Install the passenger side fender liner.

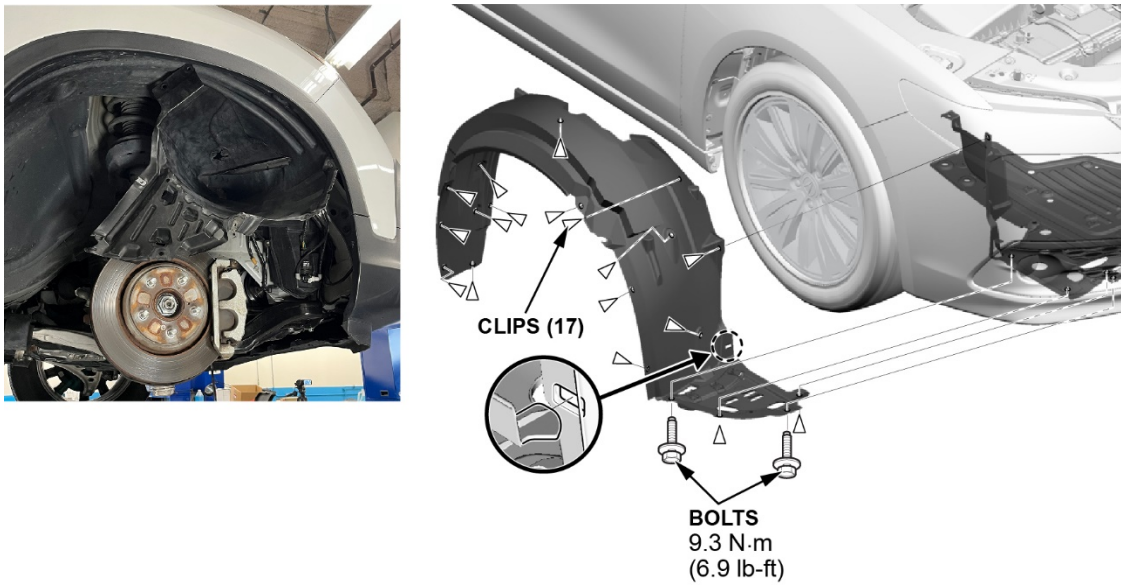

35. **INSPECTION B ONLY:** Install the bulkhead brace lower bolt.

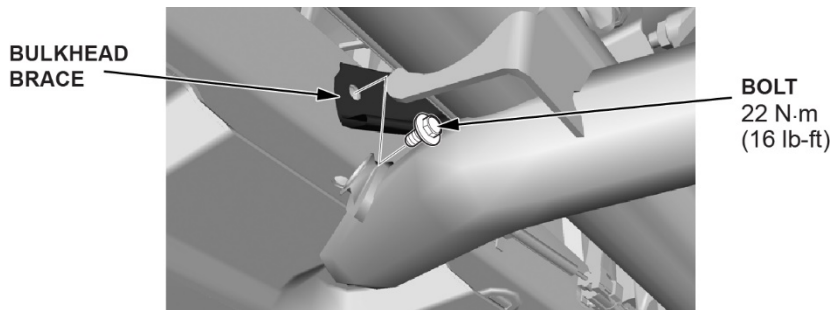


36. **INSPECTION B ONLY:** Install the lower A/C Compressor bolts and torque to **22 N-m (16lb-ft)**.

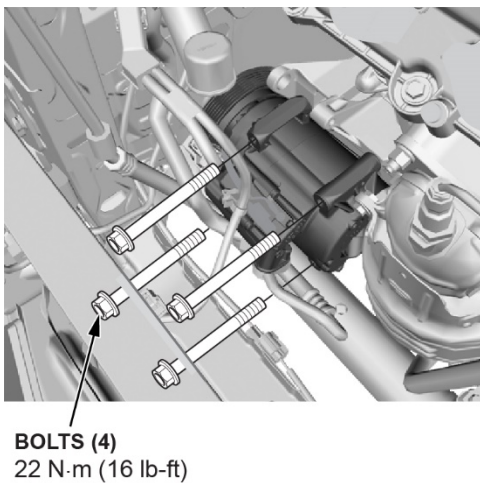


37. **INSPECTION B ONLY:** Install the passenger's side driveshaft.

1. Apply **2.0-3.0 g** of molybdenum grease to the whole splines surface of the right driveshaft.
2. After applying grease, remove the grease from the splined grooves at intervals of **2-3 splines** and from the set ring groove so that air can bleed from the intermediate shaft.
3. Install a new set ring.
4. Insert the inboard joint end of the driveshaft onto the intermediate shaft until the set ring locks in the groove.

NOTE: Insert the driveshaft horizontally to avoid damaging the oil seal.

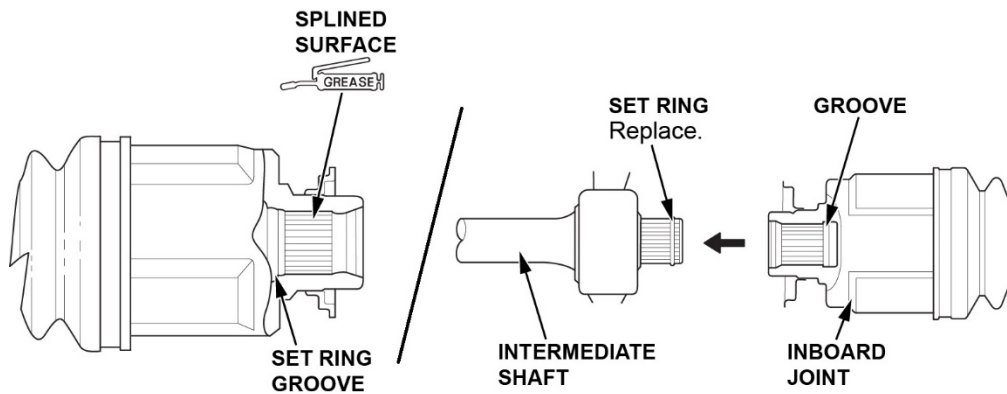


5. Apply about 3.0 g of molybdenum grease to the contact area of the outboard joint and the front wheel bearing.
6. Install the outboard joint into the front hub on the knuckle.

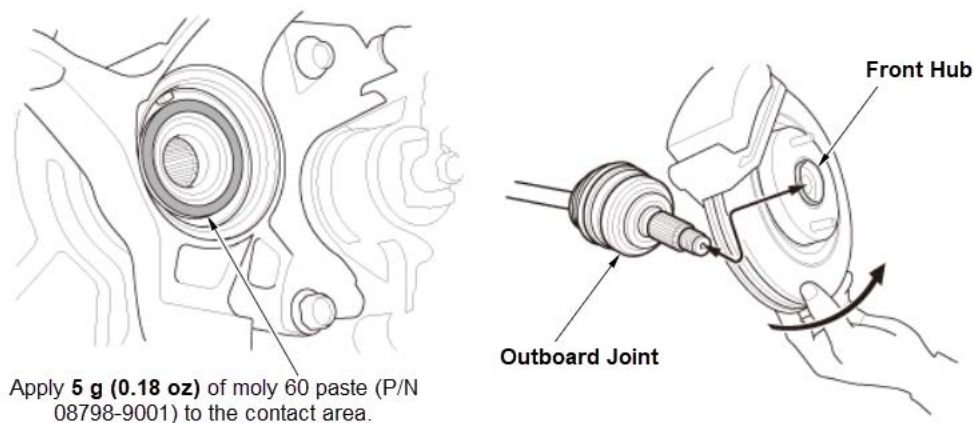


7. Install the new spindle nut.


- Apply a small amount of engine oil to the seating surface of the new spindle nut.
- Use a drift to stake the spindle nut shoulder against the driveshaft.
- Be careful not to make a crack on the spindle nut when staking.

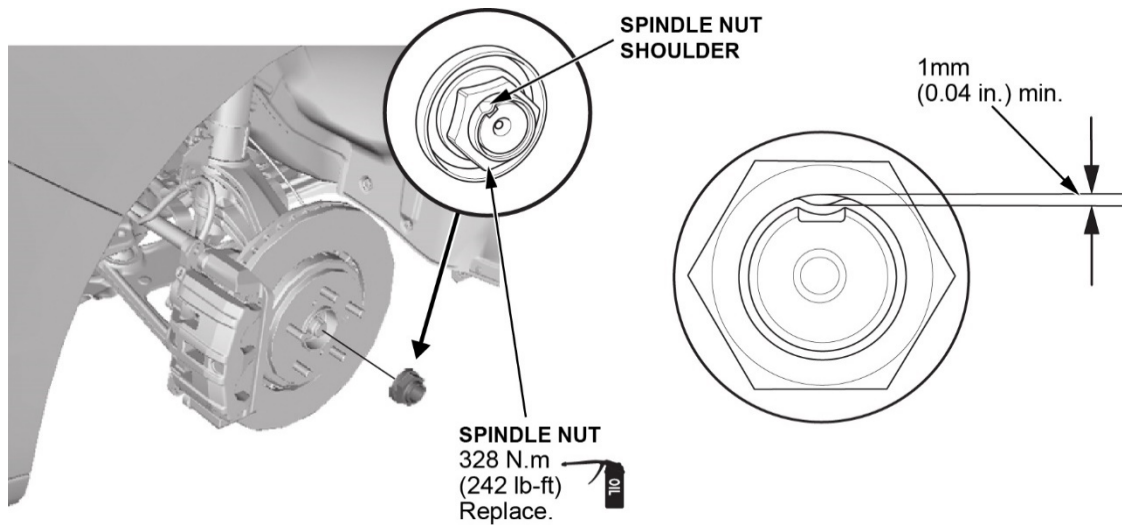


38. Connect the passenger's side lower knuckle ball joint.

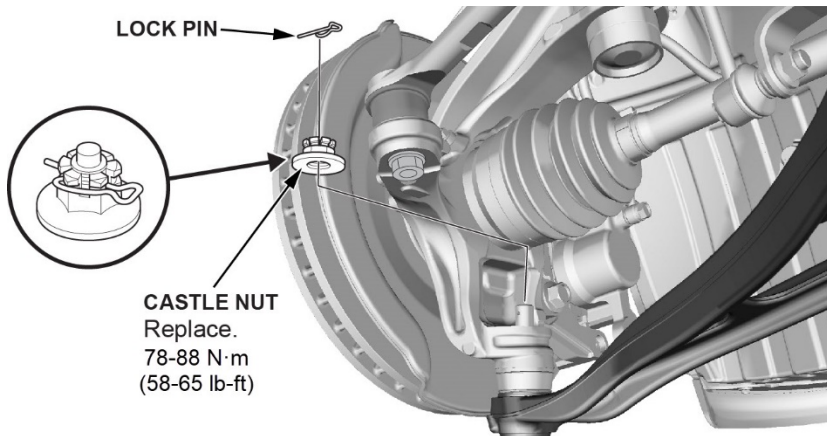

39. Connect the passenger's side tie rod ball joint.

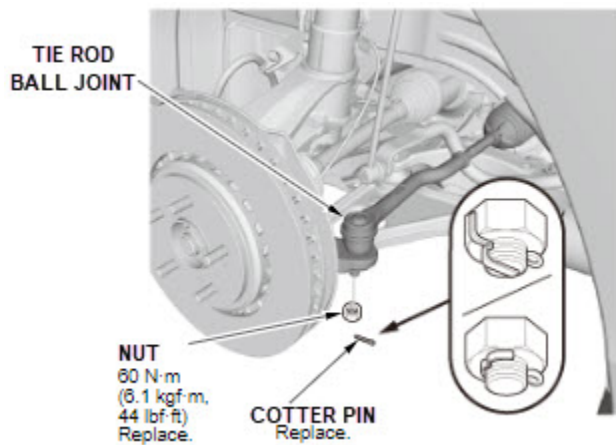


40. **INSPECTION B ONLY:** Install the drive belt.

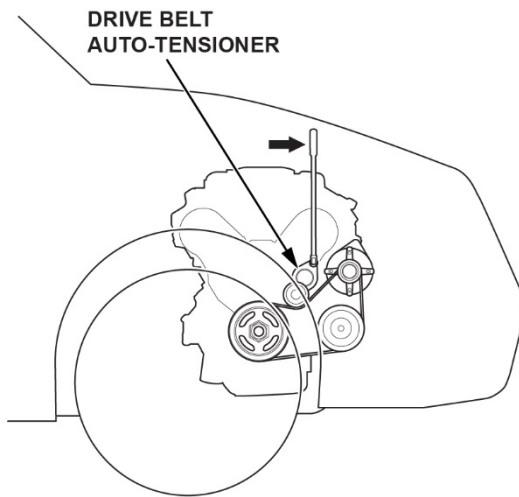

41. Install the passenger's side front wheel.

NOTE: For **2016 MDX**-torque wheel nuts to **108 N·m (80 lb-ft)**, for **2017-2020 MDX**- torque wheel nuts to **127 N·m (94 lb-ft)**.

42. Install the engine undercover.

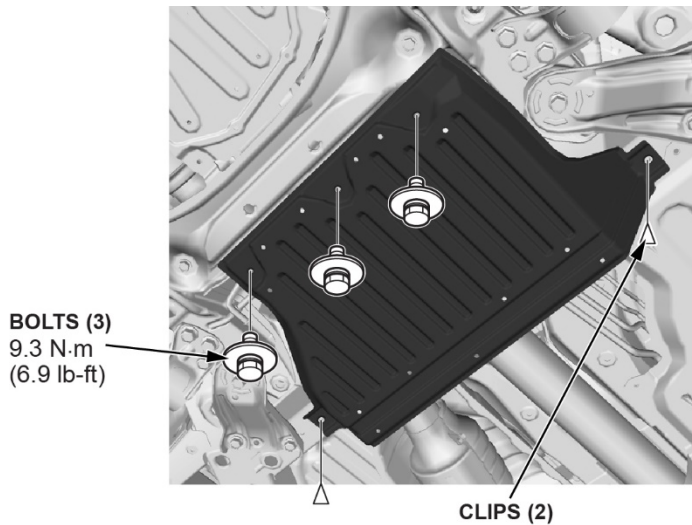


43. Install the splash shield.

44. Install the oil pan drain plug with new washer and torque to **40 N·m (30 lb-ft)**.

45. Lower the vehicle.


46. Install the spark plugs.

FRONT

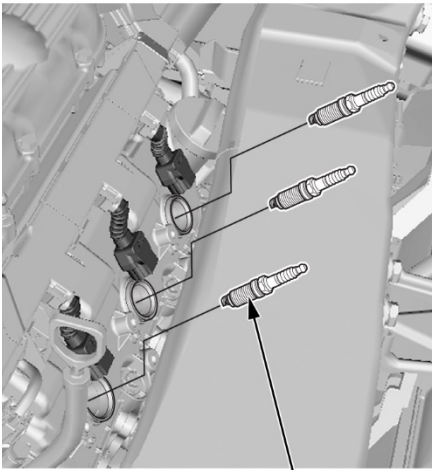

SPARK PLUGS
22 N·m (16 lb-ft)

REAR

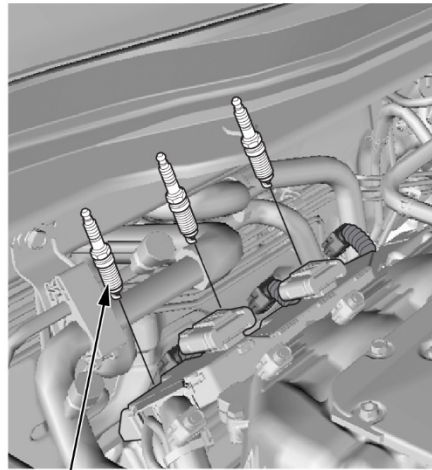


SPARK PLUGS
22 N·m (16 lb-ft)

47. Install and connect the coil packs.

FRONT


CONNECTOR

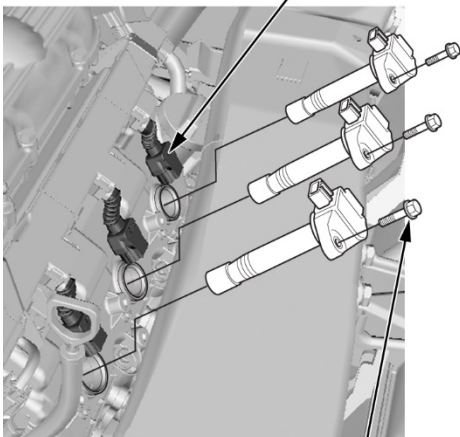

BOLTS
12 N·m
(9 lb-ft)

REAR

CONNECTOR

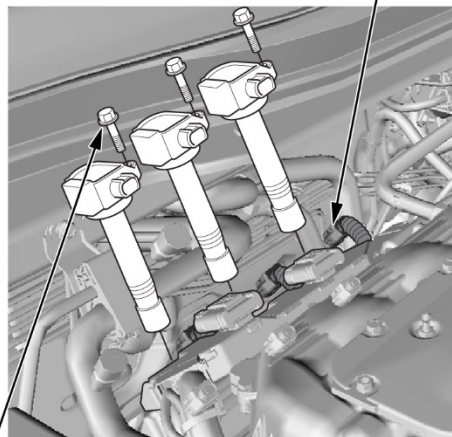

BOLTS
12 N·m
(9 lb-ft)


48. Install the oil dipstick.

49. Refill the engine with recommended engine oil.


Capacity

At Oil Change – 5.1L (5.4 US qt)


50. Connect the 12-volt battery.

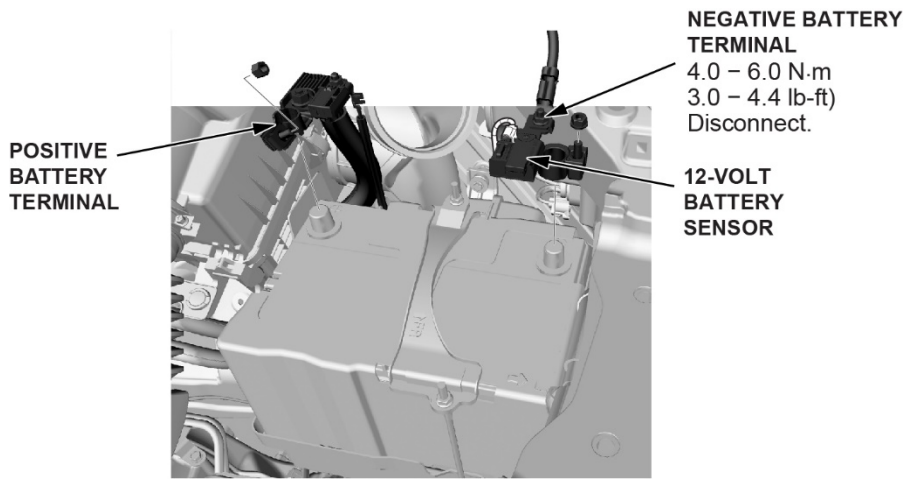


51. Install the air intake tube.

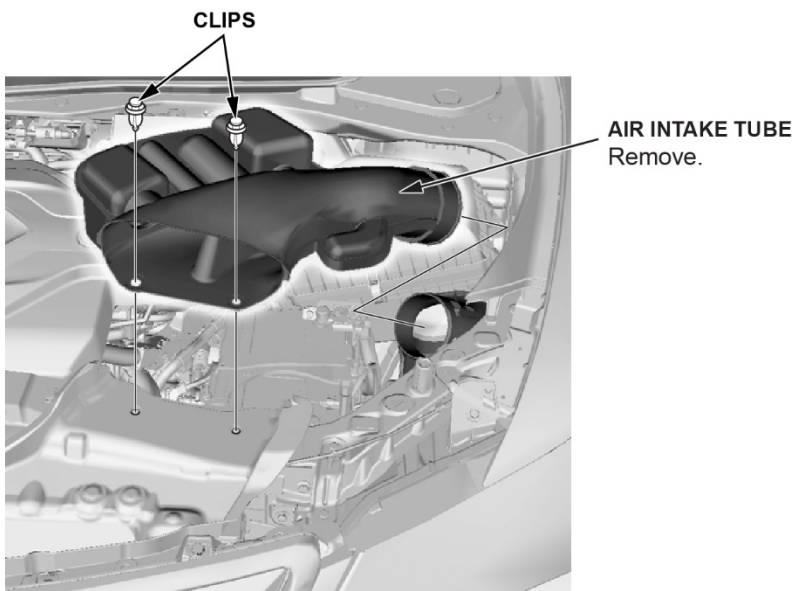

52. Install the front bulkhead cover.

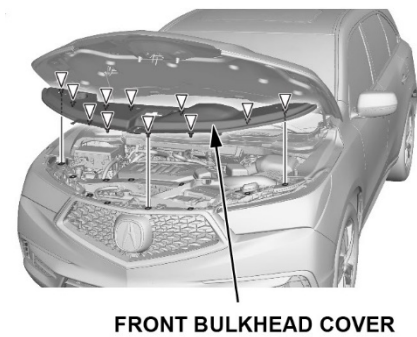

53. Install the engine cover.

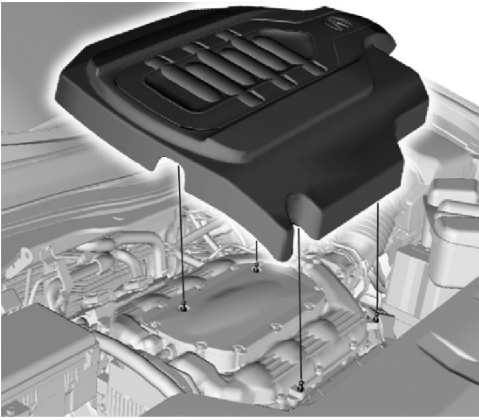

54. Make sure the vehicle has sat for at least **3 hours** from the time the oil pan was reinstalled.

Note: This is to make sure the sealant on the oil pan has completely cured.

55. Connect to the i-HDS.

56. Do a PCM reset.

1. Select the PGM-FI system with the i-HDS.
2. Reset the PCM with the i-HDS while the engine is stopped.
3. Turn the vehicle to the OFF (LOCK) mode.
4. Turn the vehicle to the ON mode and wait **30 seconds**.
5. Turn the vehicle to the OFF (LOCK) mode and disconnect the i-HDS from the DLC.

57. Do the CKP Pattern clear and learn.

1. Turn the vehicle to ON mode, but do not start the engine.
2. Connect the i-HDS to the DLC located under the driver's side of the dashboard.
3. Select CRANK PATTERN in the ADJUSTMENT MENU with the i-HDS.
4. Select CRANK PATTERN CLEAR with the i-HDS, and clear the CKP pattern.
5. Select CRANK PATTERN LEARNING with the i-HDS, and follow the screen prompts.
6. Turn the vehicle to the OFF (LOCK) mode.
7. Jump the SCS line with the i-HDS.
8. Wait **60 seconds** and exit the SCS mode with the i-HDS.

58. Do the Idle Speed Inspection.

NOTE: If the idle speed is not within specification, do the *PCM Idle Learn Procedure* in the service manual.

1. Start the engine and place the vehicle in PARK or NEUTRAL.
2. Hold the engine speed **without load** at **3,000 rpm** until the radiator fan comes on, then let it idle.
3. Check the idle speed under no load conditions: headlights, blower fan, radiator fan, audio system, and A/C off.

Idle Speed at No Load Should Be:

Engine: 680 ± 50 rpm in PARK or NEUTRAL

4. Let the engine idle for 1 minute with a high electrical load (A/C on, temperature set to max cool, blower fan on high, headlights on high beam).

Idle speed at High Load Should Be:

Engine: 680 ± 50 rpm in PARK or NEUTRAL

59. Do the VSA Sensor Neutral Position Memorization procedure.

NOTE: Do not press the brake pedal during this procedure.

1. Park the vehicle on a flat and level surface.
2. Make sure the steering wheel is straight ahead.
3. Select **VSA ADJUSTMENT** in the i-HDS.
4. Select **ALL SENSORS**, and follow the screen prompts.

60. Do the Steering Angle Sensor Neutral Position.


1. Select **EPS ADJUSTMENT** on the i-HDS.
2. Select **EPS STEERING ANGLE SENSOR VALUE CLEAR**, and follow the screen prompts.

61. Exit the i-HDS, **REPAIR #1** is complete.

NOTE: Link to CONTENT REFERENCE, ([Click HERE](#)).


REPAIR #2 LONG BLOCK REPLACEMENT

1. Remove the steering joint cover, then disconnect the steering joint from the pinion shaft.
NOTE: *Steering Gearbox Removal and Installation* ([Click Here](#))
2. Remove the passenger's side center console side cover.
NOTE: *Center Console Side Cover Removal and Installation* ([Click Here](#))
3. Disconnect the 2 EPS connectors from the passenger side footwell in front of center console. Push the harness through the firewall. Pull the harness zip tie from body bolt.
NOTE: Step 12, *Engine Removal and Installation* ([Click Here](#))
4. Remove the front bulkhead cover.
NOTE: *Front Bulkhead Cover Removal and Installation* ([Click Here](#))
5. Remove the air intake tube and air cleaner box.
NOTE: *Air Cleaner Removal and Installation* ([Click Here](#))
6. Disconnect the negative 12-volt battery cable, then disconnect the positive battery cable.
NOTE: *Battery Terminal Disconnection and Reconnection* ([Click Here](#))
7. Disconnect the battery vent blower connector, then remove the 12-volt battery.
NOTE: *Battery Removal and Installation* ([Click Here](#))
8. Disconnect the EVAP cannister purge hose and the brake booster vacuum hose.
NOTE: Steps 9-10, *Engine Removal and Installation* ([Click Here](#))
9. Disconnect the PCM and engine wire harness connectors.
NOTE: *Engine Removal and Installation* ([Click Here](#))
10. Lift the vehicle.
11. Remove the front wheels.
NOTE: For **2016 MDX**-torque wheel nuts to **108 N·m (80 lb-ft)**, for **2017-2020 MDX**- torque wheel nuts to **127 N·m (94 lb-ft)**.
12. Move the driver's side fender liner as needed.
13. **(SH-AWD)** Unbolt the propeller shaft from the transfer case.
NOTE:
 - Make a reference mark across the propeller shaft and transfer case flanges.
 - *Propeller Shaft Removal and Installation* ([Click Here](#))

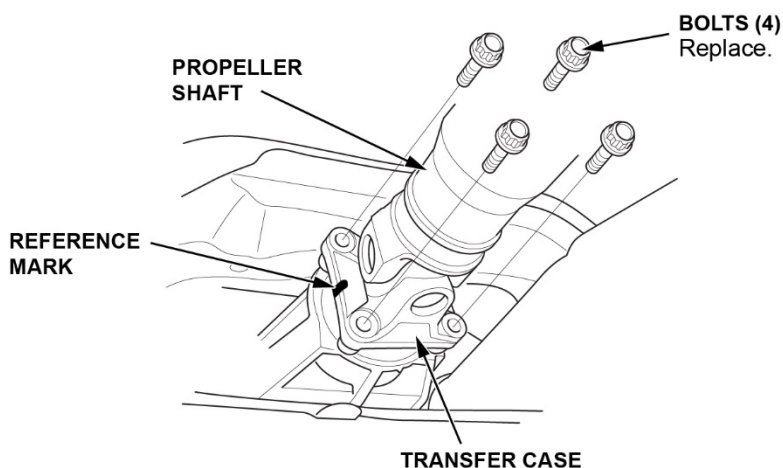


14. Drain the coolant.
NOTE: *Coolant Replacement* ([Click Here](#))

15. **If not removed during inspection B**, separate the passenger side axle joint from the intermediate shaft.

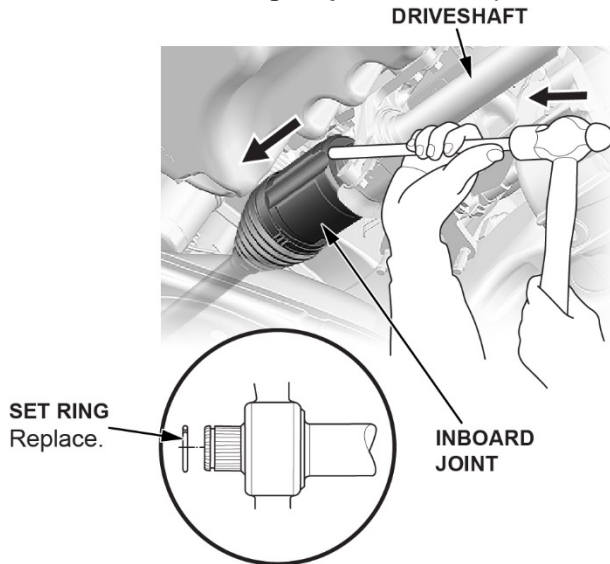

16. Remove the transmission ground cable.
NOTE: Step 36, *Automatic Transmission Removal and Installation* ([Click Here](#))
17. Disconnect the front engine mount actuator connector.
NOTE: See step 33, *Automatic Transmission Removal and Installation* ([Click Here](#))
18. Disconnect the rear engine mount actuator connector.
NOTE: Step 2, *Rear Engine Mount Removal and Installation* ([Click Here](#))
19. Remove the torque converter bolts.
NOTE: Step 37, *Automatic Transmission Removal and Installation* ([Click Here](#))
20. Disconnect the upper stabilizer link mounting point (both sides).
NOTE: Step 3, *Front Stabilizer Link Removal and Installation* ([Click Here](#))
21. Loosen the 2 lower condenser bolts.
22. Remove the lower bolts to the core support brace.
23. Remove the lower bulkhead brace bolts.
NOTE: Step 2-Right Side, *Front Bulkhead Brace Removal and Installation* ([Click Here](#))
24. Lower the vehicle.
25. Remove the upper bulkhead (Do not remove the front bumper center upper beam).
NOTE: **Step 5 only**, *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))
26. Disconnect the upper and lower radiator hoses from the engine.
27. Disconnect the ATF warmer lower hose on engine side.
NOTE: Step 10, *ATF Warmer Removal and Installation* ([Click Here](#))
28. **If not removed during inspection B**, remove the passenger side bulkhead brace.
NOTE: *Front Bulkhead Brace Removal and Installation* ([Click Here](#))
29. **If not removed during inspection B**, disconnect the A/C condenser fan, then remove the condenser fan shroud assembly.
NOTE: *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))
30. **If not removed during inspection B**, remove the accessory drive belt.
NOTE: *Drive Belt Removal and Installation* ([Click Here](#))
31. Disconnect and remove the alternator.
NOTE: *Alternator Removal and Installation* ([Click Here](#))

32. If not removed during inspection B, unbolt the A/C compressor and move forward to sit on core support.

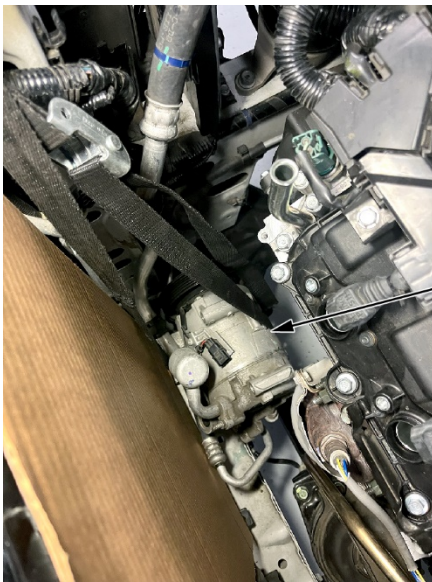




SECURED
COMPRESSOR

33. Disconnect the heater hoses from the engine.

NOTE *Water Passage Removal and Installation* ([Click Here](#))

34. Disconnect the quick connect style ATF cooler lines (if equipped).

- Remove the bolt and bracket.
- Push the retaining clip out, then detach the cooler lines.

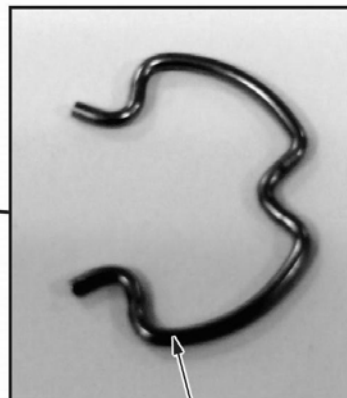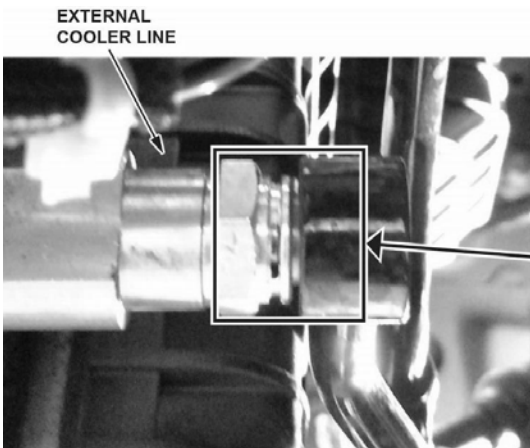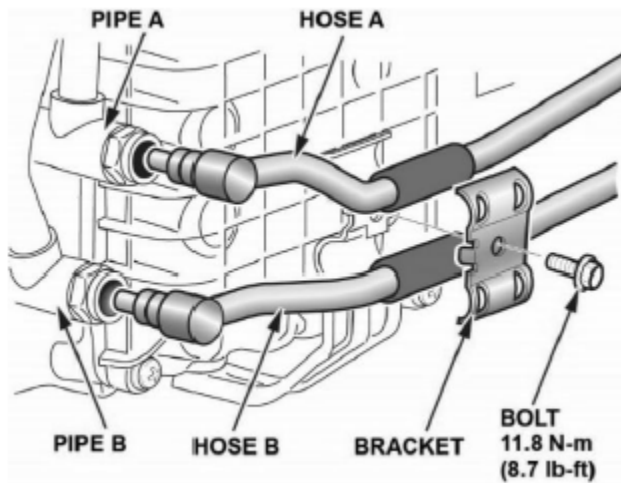

RETAINING CLIP

35. Unbolt the side engine mount bracket.

NOTE: *Side Engine Mount Removal and Installation* ([Click Here](#))


36. Disconnect the fuel line at the high-pressure fuel pump.

NOTE: *Fuel Line/Quick-Connect fitting Removal and Installation* ([Click Here](#))


37. Raise the vehicle to waist height.

38. If the passenger side tie rod ball joint and lower knuckle ball joint were separated for the main cap inspection:


- Reinstall the lower knuckle ball joint with a new castle nut. Torque to specification then install the lock pin.

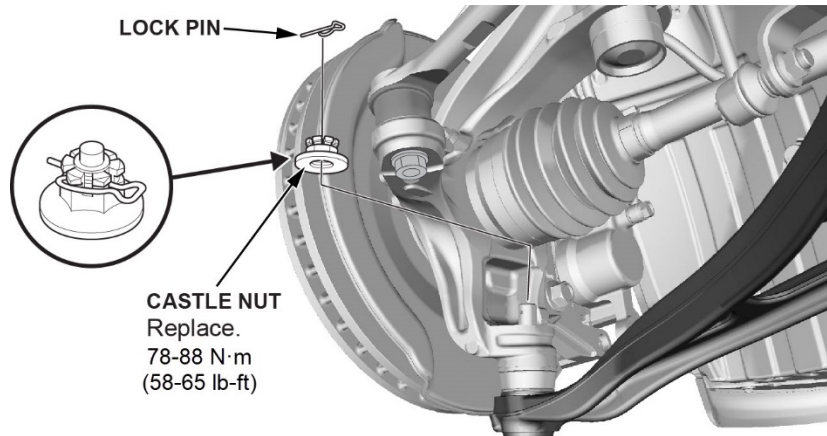

- Reinstall the tie rod ball joint with a new nut. Torque to specification then install a new cotter pin.

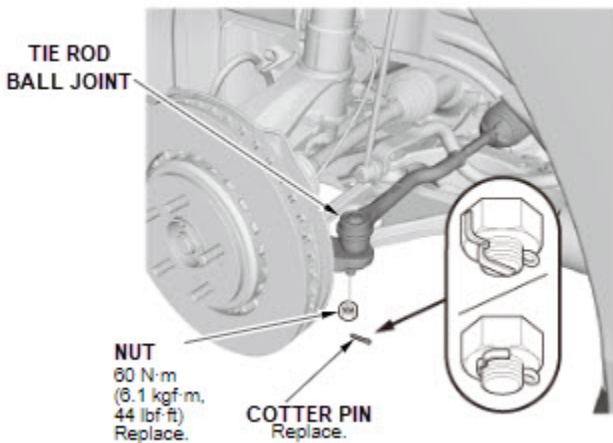


39. Remove the pinch bolt for the knuckle and strut (both sides).

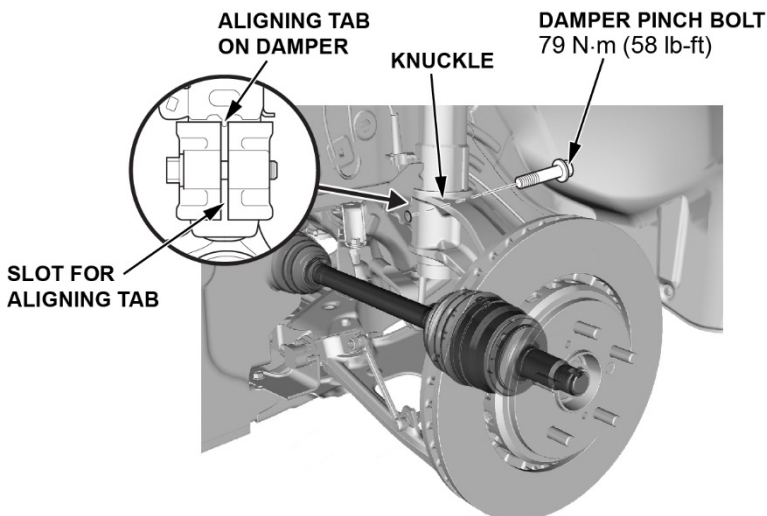


40. Leaving the hydraulic brake line attached, unbolt the brake caliper at the bracket and hang it on the spring with an S-hook (both sides).


BOLTS
72 N·m (53 lb-ft)

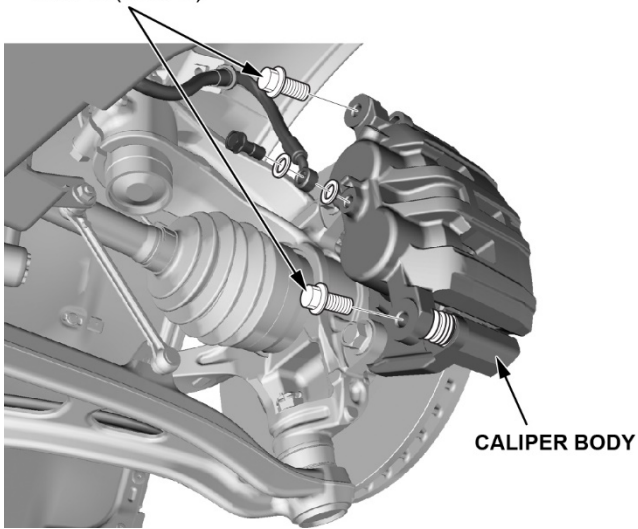

41. Remove the wheel speed sensor from the knuckle and secure it so it isn't hanging loose.

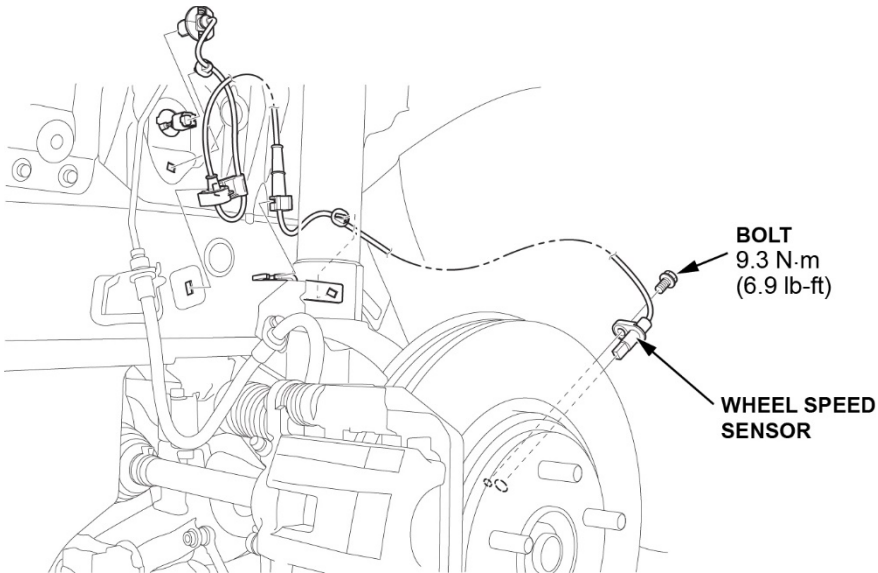

42. Set the lift table under the subframe with the subframe attachment.

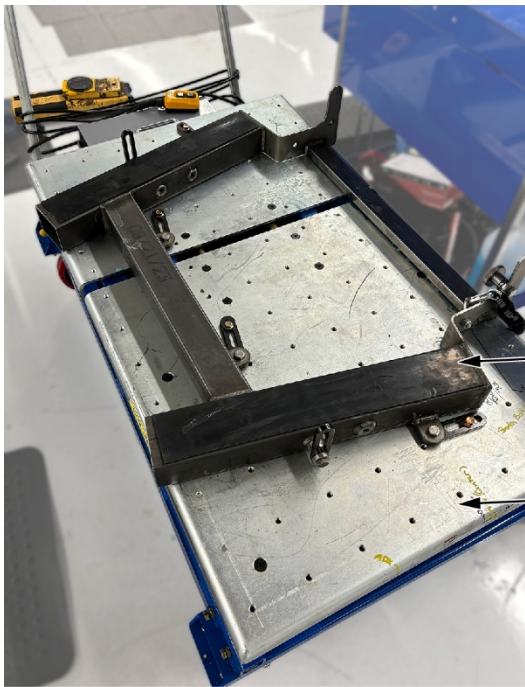


43. Raise the lift table until it contacts the subframe.
44. Unbolt the front subframe.
Note: *Subframe Removal and Installation* ([Click Here](#))
45. Lower the lift table with the subframe, engine, front knuckles, and transmission assemblies.
NOTE: Lower table and/or raise vehicle to clear the powertrain from the chassis.



46. **If not removed during inspection B**, remove the passenger's side driveshaft spindle nut, then remove the driveshaft.
NOTE: *Front Driveshaft Removal and Installation* ([Click Here](#))
47. Disconnect the bank 1 oxygen sensors, then remove the front and rear catalytic convertors.
NOTE: *Warm Up TWC Removal and Installation* ([Click Here](#))
48. Remove the intermediate shaft.
NOTE: *Intermediate Shaft Removal and Installation* ([Click Here](#))
49. Insert the 9AT Protecting Cap (07AAK-5J4A100) into intermediate shaft opening in transmission.
50. Mount the **new long block assembly** to the engine stand.

51. Apply painter's tape to the intake ports.

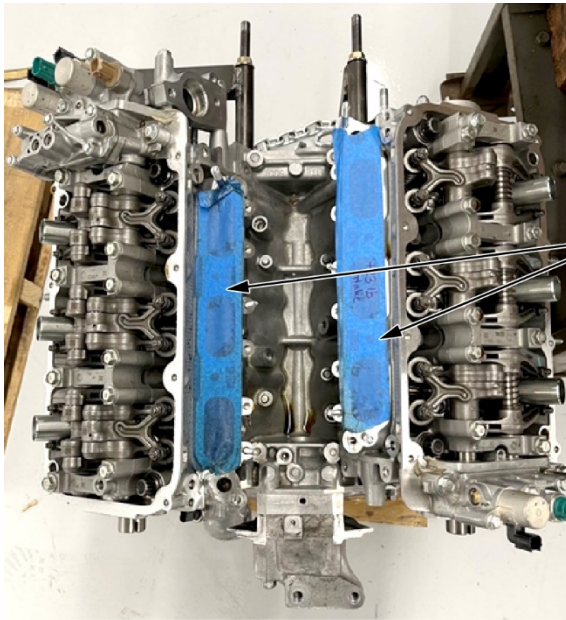

PAINTERS TAPE
Apply tape to the
intake ports.

52. Transfer the A/C compressor bracket to the new engine.



BOLTS (4)
45 N-m
(33 lb-ft)

53. Remove the front engine mount stops.
NOTE: Steps 4-5, *Front Engine Mount Removal and Installation* ([Click Here](#))
54. Remove the intake manifold and intake manifold base.
NOTE: Steps 7-9, *Intake Manifold Removal and Installation* ([Click Here](#))
55. Transfer the bank 2 heat shield at the valve cover to the new engine.
56. Transfer the timing belt guide plate.
NOTE: *Timing Belt Removal and Installation* ([Click Here](#))
57. Transfer the crankshaft pulley and torque to **65 N-m (48 lb-ft), then an additional 60°**.
58. Transfer the CKP sensor with a new O-ring.
NOTE: *CKP Sensor Removal and Installation* ([Click Here](#))
59. Unbolt and disconnect the ICM.
NOTE: *Injector Control Module Removal and Installation* ([Click Here](#))
60. Disconnect the fuel rail connectors behind the ICM.
61. Remove the high-pressure fuel pump cover and injector cover.
NOTE: *High Pressure Fuel Pump Removal and Installation* ([Click Here](#))
62. Unplug the high-pressure fuel pump coupler.
63. Remove the fuel joint pipe.
64. Remove the fuel injector rails with the fuel injectors still attached.

NOTE: *Injector Removal and Installation* ([Click Here](#))

65. Remove the water passage off original engine.
66. Remove the EVAP canister purge joint (do not reuse).
67. Unplug the camshaft position sensor on the rear cylinder head.
68. Remove the rubber insulator from the top of the right engine mount bracket.
69. Transfer the knock sensors and sub-harness to the new engine.

NOTE:

- Must be done BEFORE injectors and fuel rails are installed.
- Coolant crossover pipe may need to be removed in order to secure the sub-harness to the new block.
- *Knock Sensor Removal and Installation* ([Click Here](#))

70. Transfer the front valve cover breather vent hose.
71. Transfer the rear valve cover breather.
72. Transfer the ignition coils.
73. Transfer the engine wiring harness.
74. Install new fuel injector seals.

NOTE: Step 1, *Injector Removal and Installation* ([Click Here](#))

75. Install the fuel rail/fuel injector assemblies with new seals.

NOTE: *Injector Removal and Installation* ([Click Here](#))

76. Install the ICM bracket.
NOTE: Step 16, *Cylinder Head Removal and Installation* ([Click Here](#))
77. Install the ICM and reconnect.
NOTE: *Injector Control Module Removal and Installation* ([Click Here](#))
78. Install the injector cover.
79. Install the oil dipstick and oil fill cap.
80. Install the ICM cover.
81. Secure the engine harness ground.
82. Install the high-pressure pump with a new fuel joint pipe.
NOTE: *High Pressure Fuel Pump Removal and Installation* ([Click Here](#))
83. Install the high-pressure pump cover.
84. Install the intake manifold base, manifold, and cover with new gaskets.
NOTE: *Intake Manifold Removal and Installation* ([Click Here](#))
85. Connect the front bank breather tube to the intake manifold.
86. Connect the water passage to the throttle body.
87. Connect the EVAP vacuum hoses and harness connector.
88. Install the engine hanger to the original engine.
89. Loosen the rear engine mount bracket bolts completely from the engine block.
NOTE: Installation step 1, *Engine Removal and Installation* ([Click Here](#))
90. Remove the front engine mount and front engine mount bracket.
NOTE: Installation step 1, *Engine Removal and Installation* ([Click Here](#))
91. Remove the skid plate, disconnect the starter harness, then remove the starter.
NOTE: *Starter Removal, Installation, and Performance Test* ([Click Here](#))
92. Bolt on the special tool engine hanger (VSC02C000019) and the load lever to the original engine.
93. Separate the original engine from the transmission.
94. Remove the drive plate.
95. Original engine is no longer needed from this point forward.
96. Install the engine hanger (VSB02C000019) to the new long block.
97. Remove the new long block from the engine stand.
98. Install the drive plate.
NOTE: *Drive Plate Removal and Installation* ([Click Here](#))

99. Install the new engine to the transmission using the alignment pins (07AAG-5J4A100).



TRANSMISSION
ALIGN PIN
P/N 07AGG-5J4A100

100. Install the starter, starter harness, and skid plate.

NOTE: Starter Removal, Installation, and Performance Test ([Click Here](#))


101. Install the following:

NOTE: See above for appropriate hyperlinks.

1. Front engine mount bracket and mount
 2. Rear engine mount bracket
 3. Front catalyst and EGR pipe(Remove 9AT Protection cap
 4. Intermediate shaft and driveshaft
 5. Rear catalyst and engine mount heat shield
 6. Rear catalyst brace.
102. Go to SUBFRAME INSTALLATION to continue with repair.


REPAIR #3 CRANKSHAFT REPLACEMENT

1. Remove the steering joint cover, then disconnect the steering joint from the pinion shaft.
NOTE: *Steering Gearbox Removal and Installation* ([Click Here](#))
2. Remove the passenger's side center console side cover.
NOTE: *Center Console Side Cover Removal and Installation* ([Click Here](#))
3. Disconnect the 2 EPS connectors from the passenger side footwell in front of center console. Push the harness through the firewall. Pull the harness zip tie from body bolt.
NOTE: *Engine Removal and Installation* ([Click Here](#))
4. Remove the front bulkhead cover.
NOTE: *Front Bulkhead Cover Removal and Installation* ([Click Here](#))
5. Remove the air intake tube and air cleaner box.
NOTE: *Air Cleaner Removal and Installation* ([Click Here](#))
6. Disconnect the negative 12-volt battery cable, then disconnect the positive battery cable.
NOTE: *Battery Terminal Disconnection and Reconnection* ([Click Here](#))
7. Disconnect the battery vent blower connector, then remove the 12-volt battery.
NOTE: *Battery Removal and Installation* ([Click Here](#))
8. Disconnect the EVAP cannister purge hose and the brake booster vacuum hose.
NOTE: *Engine Removal and Installation* ([Click Here](#))
9. Disconnect the PCM and engine wire harness connectors.
NOTE: *Engine Removal and Installation* ([Click Here](#))
10. Lift the vehicle.
11. Remove the driver's side front wheel.
12. **(SH-AWD)** Unbolt the propeller shaft from the transfer case.
NOTE:
 - Make a reference mark across the propeller shaft and transfer case flanges.
 - *Propeller Shaft Removal and Installation* ([Click Here](#))

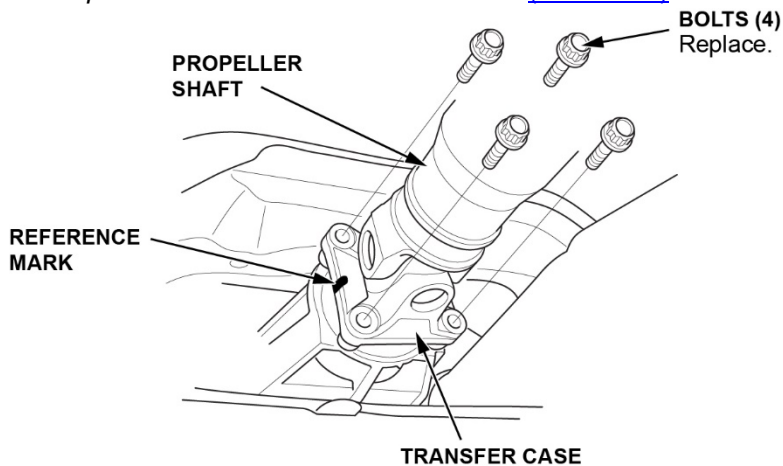


13. Drain the coolant.
NOTE: *Coolant Replacement* ([Click Here](#))

14. Separate the passenger side driveshaft inner joint from the intermediate shaft.

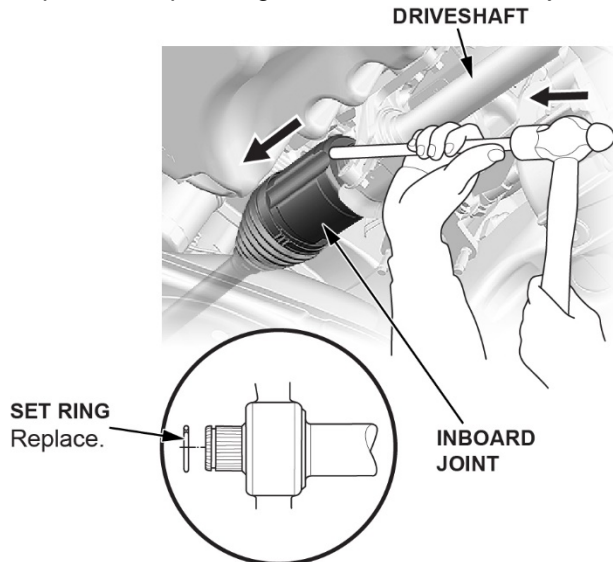

15. Remove the transmission ground cable.
NOTE: See step 36, *Automatic Transmission Removal and Installation* ([Click Here](#))
16. Disconnect the front engine mount actuator connector.
NOTE: See step 33, *Automatic Transmission Removal and Installation* ([Click Here](#))
17. Disconnect the rear engine mount actuator connector.
NOTE: *Rear Engine Mount Removal and Installation* ([Click Here](#))
18. Remove the torque converter bolts.
NOTE: *Automatic Transmission Removal and Installation* ([Click Here](#))
19. Disconnect the upper stabilizer link mounting point (both sides).
NOTE: *Front Stabilizer Link Removal and Installation* ([Click Here](#))
20. Remove the lower bolts to the core support brace.
21. Remove the lower bulkhead brace bolts.
NOTE: *Front Bulkhead Brace Removal and Installation* ([Click Here](#))
22. Lower the vehicle.
23. Remove the upper bulkhead (Do not remove the front bumper center upper beam).
NOTE: **Step 5 only**, *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))
24. Disconnect the upper and lower radiator hoses from the engine.
25. Disconnect the ATF warmer lower hose on engine side.
NOTE: *ATF Warmer Removal and Installation* ([Click Here](#))
26. **If not removed during inspection B**, remove the passenger side bulkhead brace.
NOTE: *Front Bulkhead Brace Removal and Installation* ([Click Here](#))
27. **If not removed during inspection B**, disconnect the A/C condenser fan, then remove the condenser fan shroud assembly.
NOTE: *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))
28. **If not removed during inspection B**, remove the accessory drive belt.
NOTE: *Drive Belt Removal and Installation* ([Click Here](#))
29. Disconnect and remove the alternator.
NOTE: *Alternator Removal and Installation* ([Click Here](#))

30. If not removed during inspection B, unbolt A/C compressor and move forward to sit in core support.



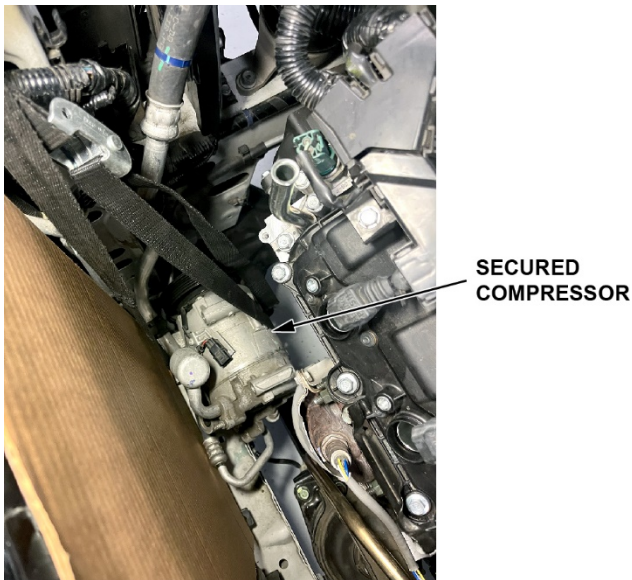


31. Disconnect the heater hoses from the engine.

NOTE *Water Passage Removal and Installation* ([Click Here](#))

32. Disconnect the quick connect style ATF cooler lines (with ATF Cooler).

- Remove the bolt and bracket.
- Push the retaining clip out, then detach the cooler lines.

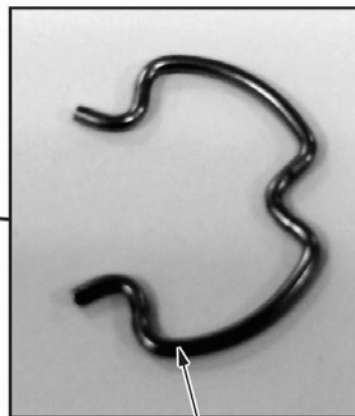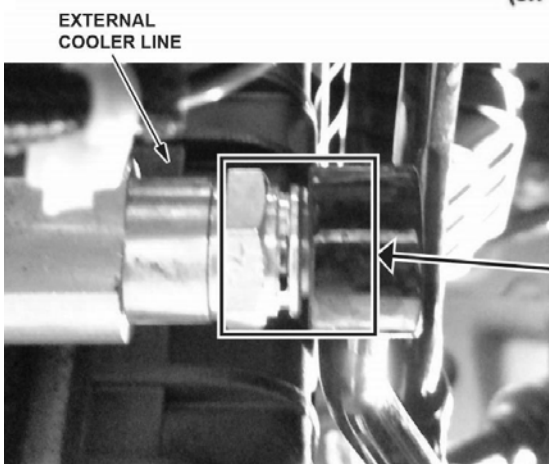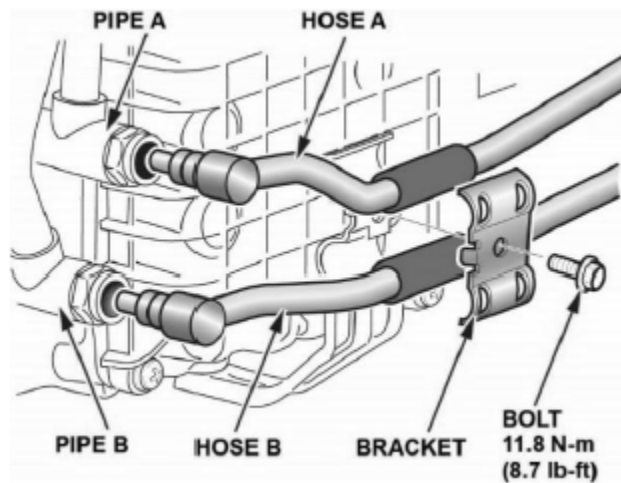

33. Unbolt side engine mount bracket.

NOTE: *Side Engine Mount Removal and Installation* ([Click Here](#))


34. Disconnect the fuel line at the high-pressure fuel pump.

NOTE: *Fuel Line/Quick-Connect fitting Removal and Installation* ([Click Here](#))


35. Raise the vehicle to waist height.

36. If the passenger side tie rod ball joint and lower knuckle ball joint were separated during inspection B:


- Reinstall the lower knuckle ball joint with a new castle nut. Torque to specification then install the lock pin.

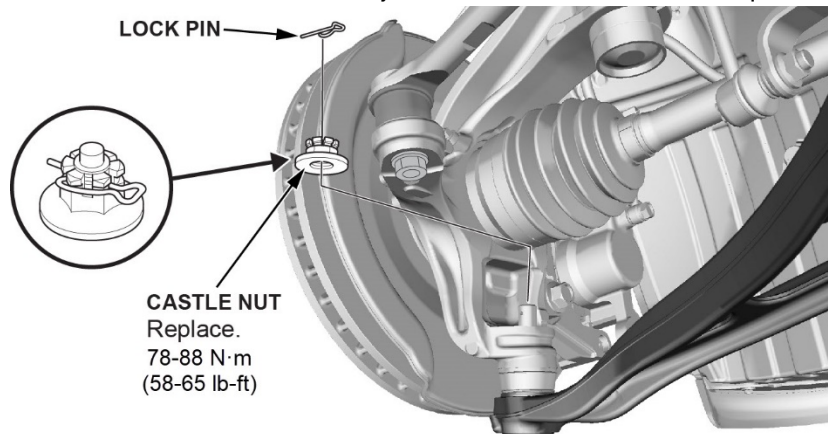

- Reinstall the tie rod ball joint with a new nut. Torque to specification then install a new cotter pin.

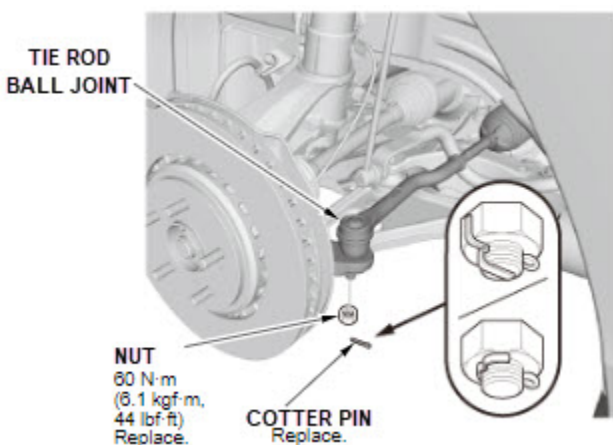


37. Remove the pinch bolt for the knuckle and strut (both sides).

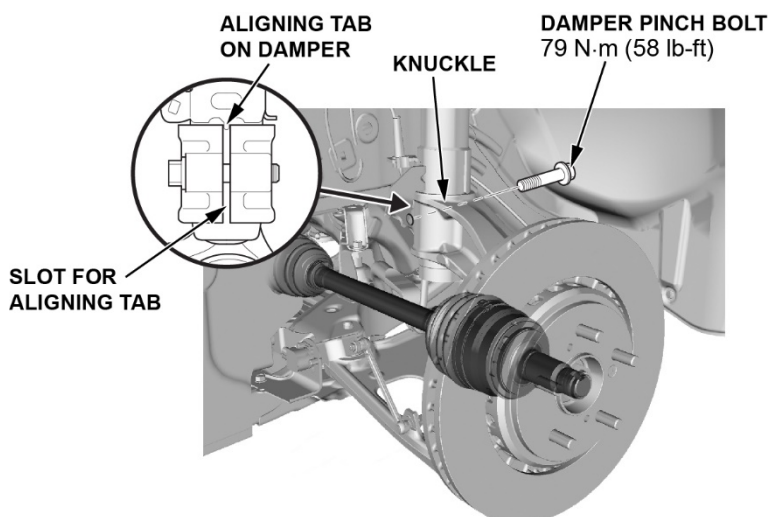


38. Leaving the hydraulic brake line attached, unbolt the brake caliper at the bracket and hang on the spring with an S-hook (both sides).


BOLTS
72 N·m (53 lb-ft)

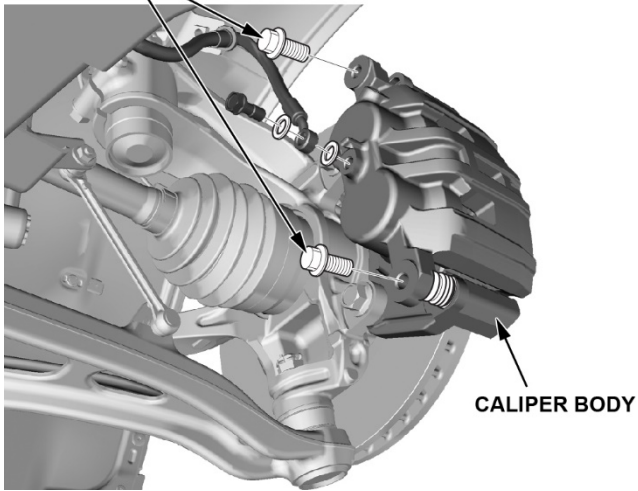


39. Remove the wheel speed sensor from the knuckle and secure it.

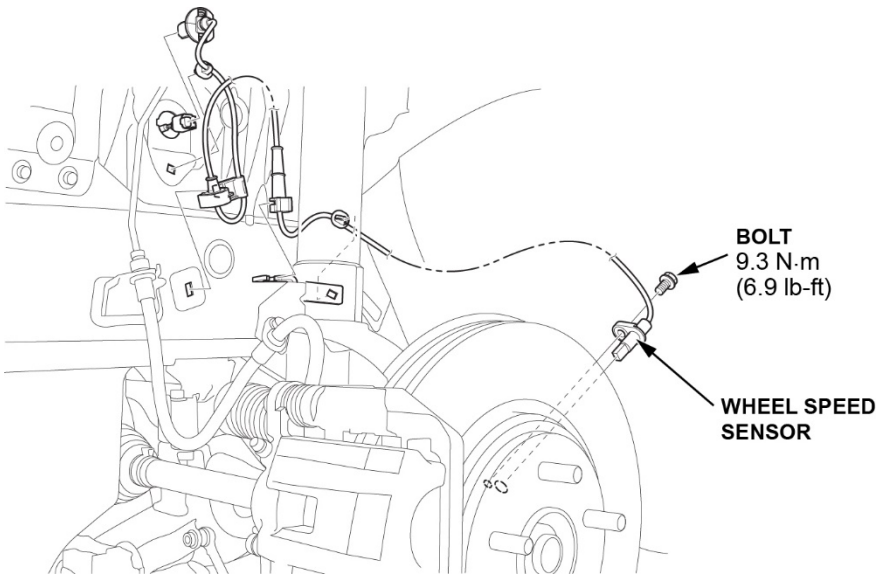

40. Set the lift table under the subframe with the subframe attachment.

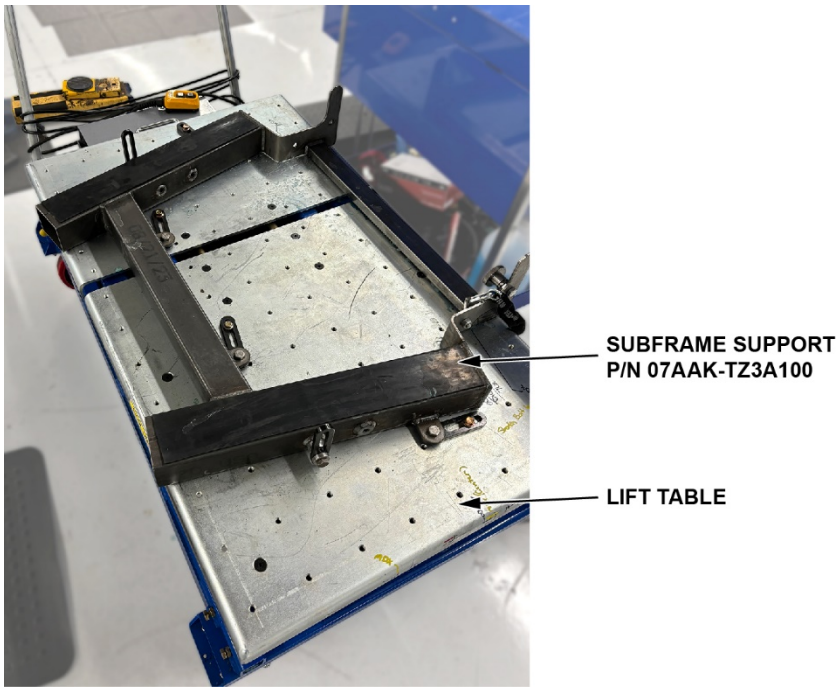


41. Raise the lift table until it contacts the subframe.
42. Unbolt the front subframe.
- NOTE: Subframe Removal and Installation ([Click Here](#))
43. Lower the lift table with the subframe, engine, front knuckles, and transmission assemblies.
- Lower table and/or raise vehicle to clear the powertrain from the chassis.

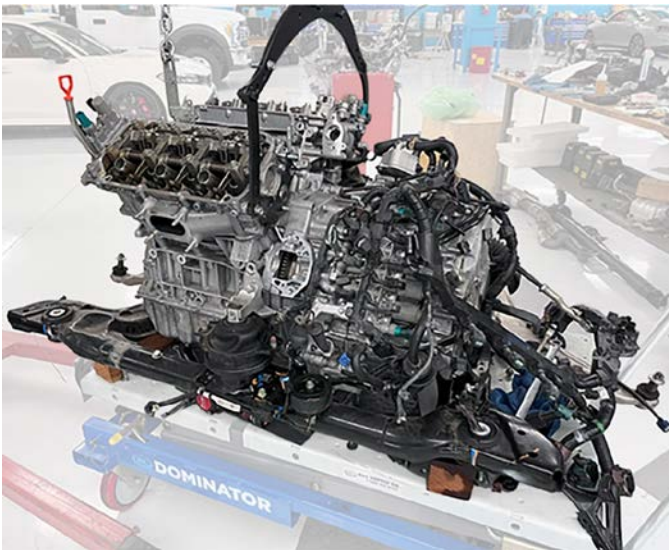

44. **If not removed during inspection B**, remove the passenger's side driveshaft spindle nut, then remove the driveshaft..
- NOTE: *Front Driveshaft Removal and Installation* ([Click Here](#))
45. Remove the EPS heat shield.
46. Disconnect the bank 1 oxygen sensors, then remove the front and rear catalytic convertors.
- NOTE: *Warm Up TWC Removal and Installation* ([Click Here](#))
47. Remove the intermediate shaft.
- NOTE: *Intermediate Shaft Removal and Installation* ([Click Here](#))
103. Insert the 9AT Protecting Cap (07AAK-5J4A100) into intermediate shaft opening in transmission.

48. Remove the A/C compressor bracket.

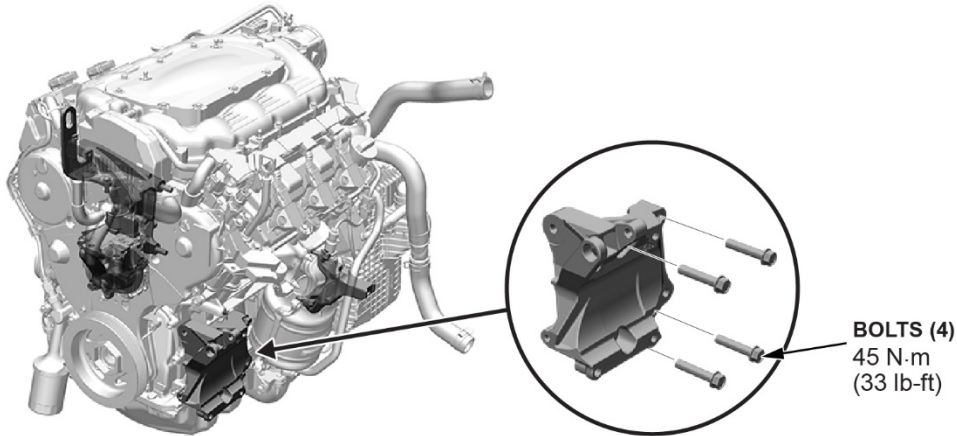

49. Remove the skid block, then disconnect the starter harness and remove the starter.
NOTE: *Starter Removal, Installation, and Performance Test* ([Click Here](#))
50. Remove the rear engine mount upper bolt, then loosen the rear engine mount bracket bolts.
NOTE: *Engine Removal and Installation* ([Click Here](#))
51. Install the engine support hanger attachment.
NOTE: Step 20.3, *Automatic Transmission Removal and Installation* ([Click Here](#))
52. Attach the engine hoist.
53. Remove the front engine mount stop and mount.
NOTE: *Front Engine Mount Removal and Installation* ([Click Here](#))
54. Separate the engine from the transmission.
55. Mount the engine to the engine stand.
56. Remove the drive plate.
NOTE: *Drive Plate Removal and Installation* ([Click Here](#))
57. Set **cylinder 1** to TDC.
NOTE: *Camshaft Timing Inspection* ([Click Here](#))
58. Reinstall the piston stoppers to **cylinders 2,3,4, and 6**.
59. Remove the timing belt covers on cylinder head and block, then remove the timing belt.
NOTE: *Timing Belt Removal and Installation* ([Click Here](#))
60. Rotate the engine **upside down** on the engine stand.
NOTE: Make sure appropriate engine fluid spill protection measures are taken.
61. Remove the oil pan.
NOTE: *Engine Oil Pan Removal and Installation* ([Click Here](#))
62. Remove the oil filter base, oil pump, and rear main seal cover.
NOTE: Steps 4-7, *Crankshaft and CKP Pulse Plate Removal, Installation, and Inspection* ([Click Here](#))
63. Install the crankshaft holder tool onto the crankshaft with the keyway at 6 o'clock position.



64. Use the crankshaft holder tool to rotate the crankshaft counterclockwise 45° from TDC.

NOTE: Rest the handle on the block.



HANDLE
Push the handle
this direction.

65. Remove the connecting rod caps for **cylinders 1, 3, and 4**.

66. Use the crankshaft holder tool to rotate the crankshaft clockwise 45° from TDC.

NOTE: Rest the handle on the block.



HANDLE
Push the handle
this direction.

67. Remove the connecting rod caps for **cylinders 2, 5, and 6**.

68. Use the crankshaft holder tool to rotate the crankshaft back to TDC.

69. Remove the crankshaft main bearing caps.

NOTE: Step 9, *Crankshaft and CKP Pulse Plate Removal, Installation, and Inspection* ([Click Here](#))

70. Lift the crankshaft out of the engine block.

71. Swap the CKP pulse plate from the original crankshaft to the new crankshaft.

NOTE:

- Make sure there are no bent or damaged teeth.
- *Crankshaft and CKP Pulse Plate Removal, Installation, and Inspection* ([Click Here](#))

72. **Call the Bearing Inspection Inquiry Team for the recommended bearing selection.**

NOTE: Log into the V-SMART tool and follow the prompts for bearing selection information.

73. Make sure all piston and rod assemblies are pushed down into the cylinder.

NOTE: Make sure the connecting rods are properly aligned with the journals.

74. Install the new upper crankshaft main bearings into the engine block.
75. Install the new upper connecting rod bearings into the connecting rods.
76. Install the crankshaft install guide (07AAG-5J6A100) to the oil pan mating surface.




CRANK INSTALL GUIDE
P/N 07AAG-5J6A100

77. Install the connecting rod tie down tools (07AAB-5G0A300) into the bolt holes on **connecting rods 1 and 5**. Using rubber bands, secure the cylinder 1 and 5 connecting rods to the outer edge of the block using rubber bands connected to the crankshaft alignment tool.



CON ROD TIE DOWN
P/N 07AAB-5G0A300

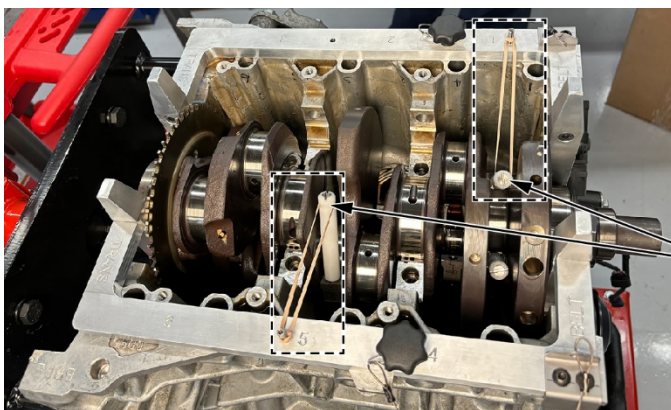

TIE DOWNS
Make sure the tie
downs are attached
to cylinders 1 and 5.

78. Install the crankshaft using the crank holder and crane. The crankshaft will drop in set to TDC.

NOTE:


- The connecting rod tie downs will guide the cylinder 1 and 5 connecting rods as the crankshaft is lowered.

Click here to view crankshaft installation video.

▶ PLAY VIDEO


Click here to view crank holder and M8 connecting rod tool.

▶ PLAY VIDEO

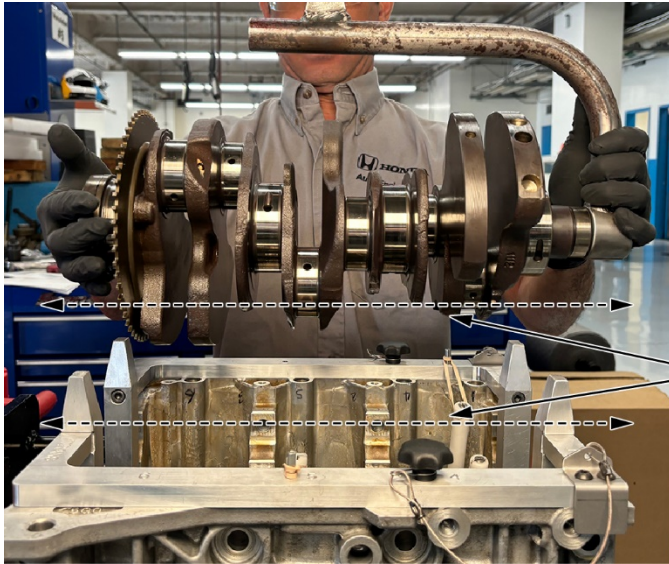

Keep the crank parallel with the block as it is lowered down.

79. Remove the connecting rod tie downs from the cylinder 1 and 5 connecting rods.

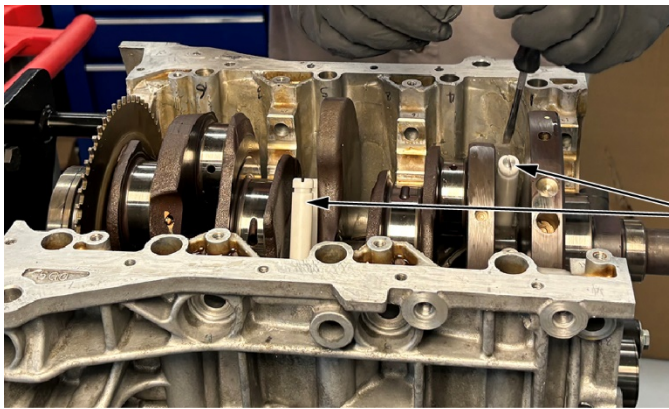


TIE DOWNS
Remove.

80. Insert new thrust washers.

81. Install the new main bearings onto the main bearing caps, then install and torque the main bearing caps.

NOTE: Crankshaft and CKP Pulse Plate Removal, Installation, and Inspection ([Click Here](#))

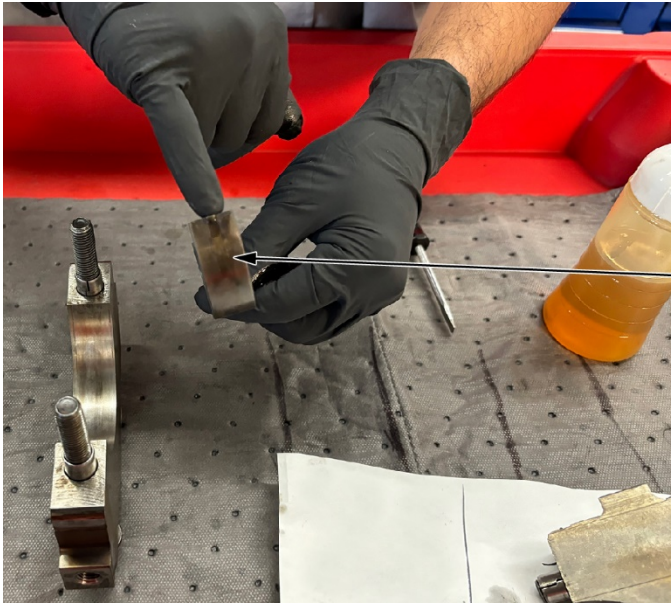

BEARING
Lubricate the bearing
prior to insertion.

82. Insert the crank holder tool back onto the crankshaft.

83. Use the crank holder tool to rotate the crankshaft counterclockwise **45 degrees** from TDC.

NOTE: Rest the handle on the block.



HANDLE
Push the handle
this direction.

84. Using the M8 rod holder tool, gently pull the connecting rods until the bearing contacts the crankshaft journal.

85. Install the lower connecting rod bearings into the connecting rod caps, then install and torque the connecting rod caps for **cylinders 1, 3, and 4**.

86. Use the crank holder tool to rotate the crankshaft clockwise **45 degrees** from TDC.

NOTE: Rest the handle on the block.



HANDLE
Push the handle
this direction.

87. Using the M8 rod holder tool, gently pull the connecting rods until the bearing contacts the crankshaft journal. Then install and torque the connecting rod bearing caps for **cylinders 2, 5, and 6**.

88. Install the oil pump and the oil filter base.

NOTE:

- New or original will depend on the Bearing Inspection Inquiry Team's judgement.
- Steps 9-13, *Crankshaft and CKP Pulse Plate Removal, Installation, and Inspection* ([Click Here](#))

89. Install the rear main seal cover.

90. Remove the piston stoppers.

91. Install the timing belt and all covers.

NOTE: *Timing Belt Removal and Installation* ([Click Here](#))

92. Install the baffle plate and oil strainer.

NOTE:

- New or original will depend on the Bearing Inspection Inquiry Team's judgement.
- Installation Step 7, *Piston, Ring, Pin, and Connecting Rod Removal and Installation* ([Click Here](#))

93. Clean and install the oil pan.

NOTE: *Engine Oil Pan Removal and Installation* ([Click Here](#))

94. Rotate the crankshaft 360° to ensure bearings allow free movement.

95. Connect the engine to the transmission with alignment pins.



TRANSMISSION
ALIGN PIN
P/N 07AGG-5J4A100

96. Install the front engine mount bracket and rear engine mount bracket.
97. Install the starter, starter harness, and skid plate.
NOTE: Starter Removal, Installation, and Performance Test ([Click Here](#))
98. Install the following:
NOTE: See above for appropriate hyperlinks.
1. A/C Compressor Bracket
 2. Front Catalyst with EGR pipe
 3. Intermediate shaft (Remove the 9AT Protecting cap)
 4. Drive shaft
 5. Rear catalyst
 6. Engine mount heat shield
 7. Rear catalyst brace
99. Go to SUBFRAME INSTALLATION to continue with repair.


SUBFRAME INSTALLATION

1. Install the subframe alignment pins.

SUBFRAME GUIDE PIN
P/N 07AAG-TZ3A100





2. Raise the lift table to the chassis using the alignment pins to locate the subframe.
NOTE: Make sure the knuckles are aligned with the strut assemblies.

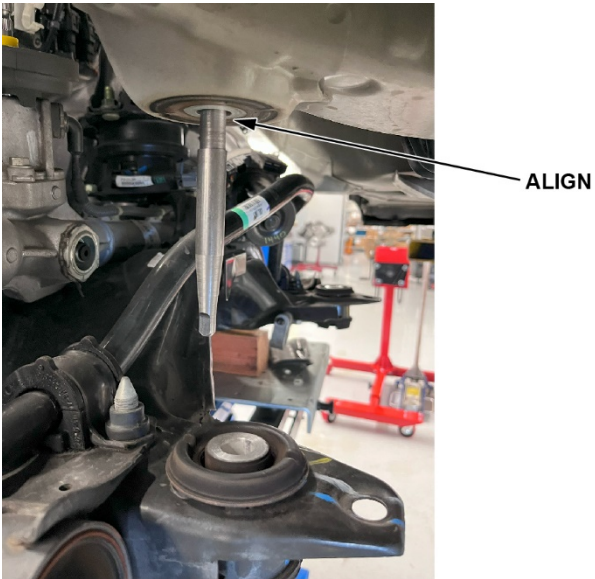


3. Install the subframe mounting bolts and torque to specification.

NOTE: *Subframe Removal and Installation* [\(Click here\)](#)


4. Install the knuckle pinch bolts, wheel speed sensors, and calipers (both sides).

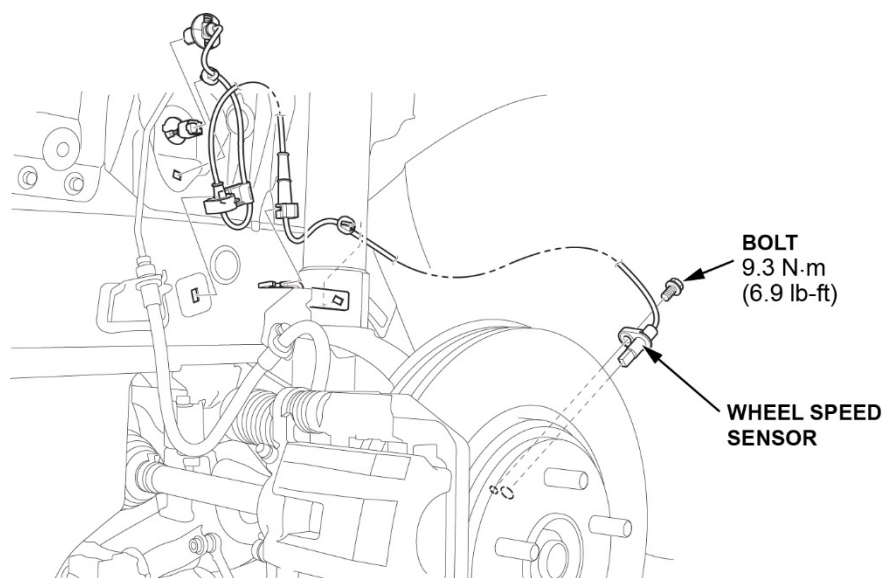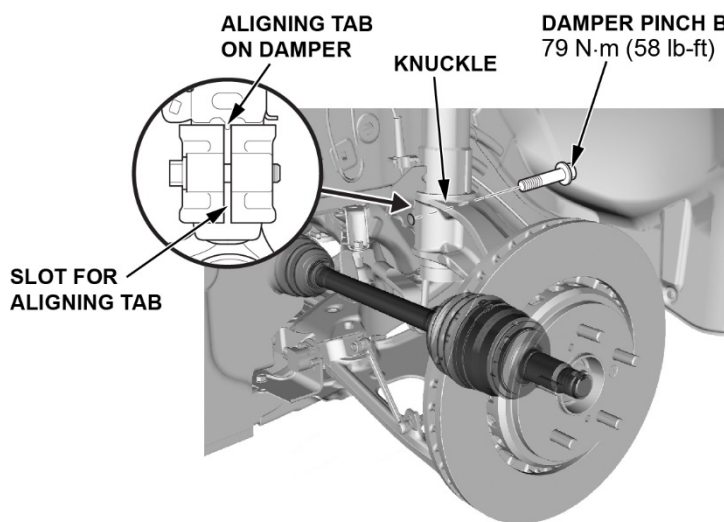


BOLTS
72 N·m (53 lb-ft)

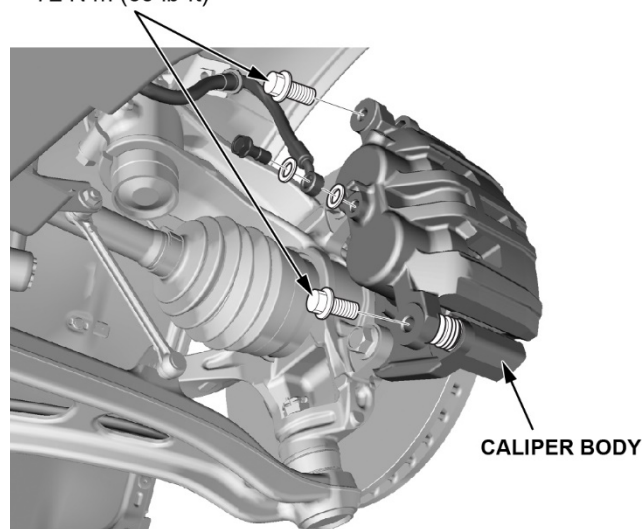


5. Install the stabilizer links (both sides).

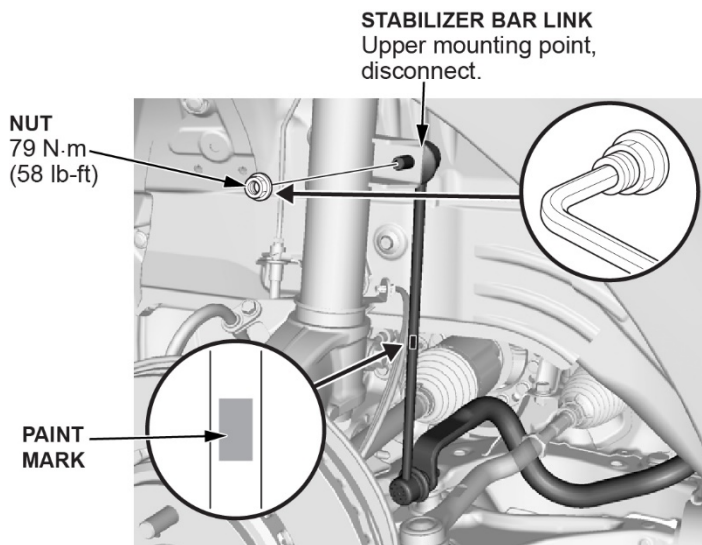

6. Install the 4 lower transmission bolts and torque to **75 N·m (55 lb-ft)**.
7. Install the torque converter bolts and torque to **27 N·m (20 lb-ft)**, then install the cover and torque to **12 N·m (9 lb-ft)**.
8. Connect the CKP Sensor and install the sensor cover and torque to **12 N·m (9 lb-ft)**.
9. Feed the 2 EPS connectors up through the floor and reconnect.
10. Install the passenger side console cover.
11. Connect the front active mount connector.
12. Install the underfloor TWC (A-pipe).
NOTE: Under-Floor TWC Removal and Installation [\(Click Here\)](#)
13. Reconnect the oxygen sensor.
14. **SH-AWD** – Connect the propeller shaft to the transfer case.

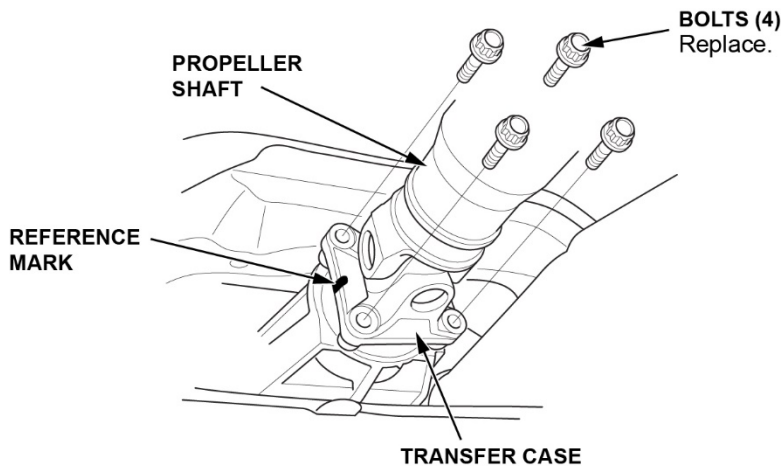

15. Install the subframe stiffener.

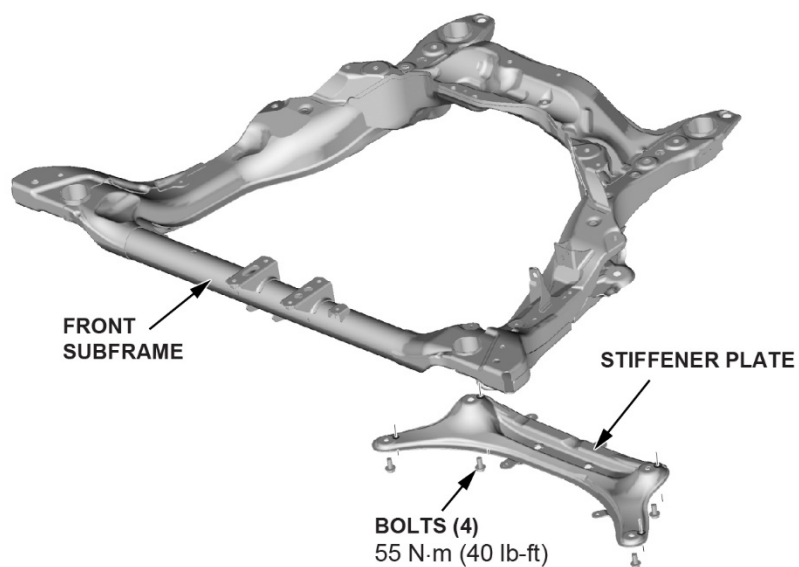

16. Install the transmission ground.

NOTE: *Engine Removal and Installation* [\(Click Here\)](#)

17. Secure the fender liners.

18. Lower the vehicle.



19. Connect the high-pressure fuel line.

20. Install the side engine mount bracket.

NOTE: *Side Engine Mount Removal and Installation* [\(Click Here\)](#)

21. Install the ATF cooler lines (if equipped).

- Push the cooler line onto fitting, then install the retaining clip.
- Attach the bracket and bolt.

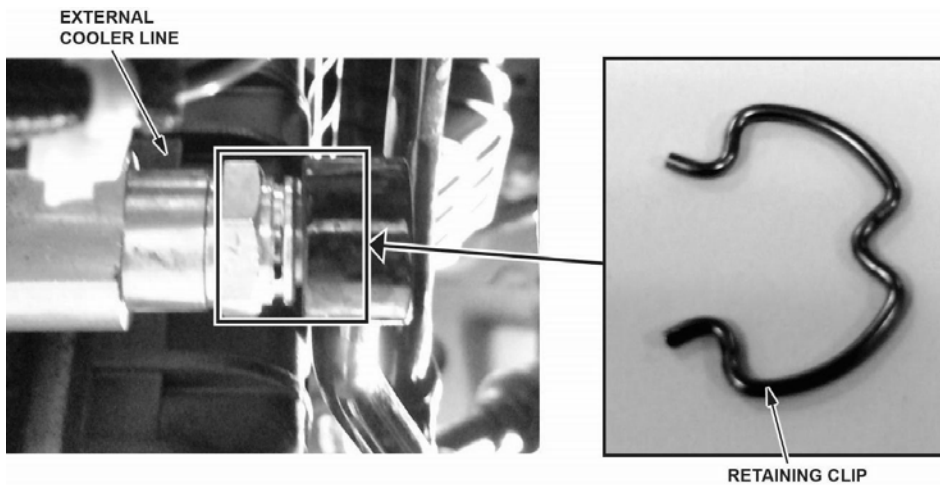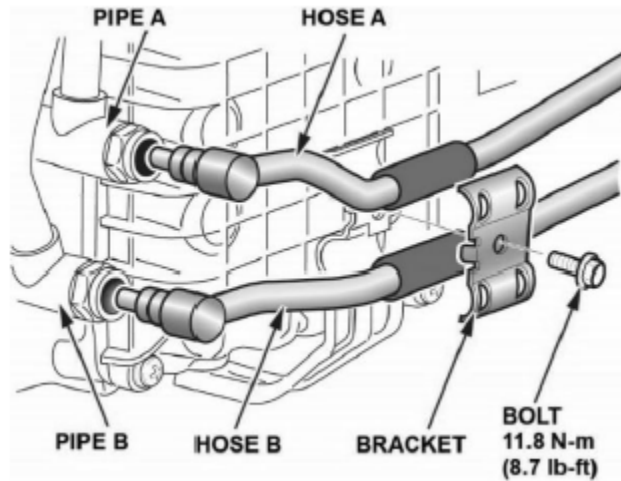

22. Reconnect the PCM and engine harness.

NOTE: *Engine Removal and Installation* ([Click Here](#))

23. Connect the brake booster and EVAP vacuum lines.

NOTE: *Engine Removal and Installation* ([Click Here](#))

24. Connect the radiator and heater hoses.

NOTE: Step 8, *Water Passage Removal and Installation* ([Click Here](#))

25. Install the A/C compressor.

NOTE: *A/C Compressor Removal and Installation* ([Click Here](#))

26. Install the alternator.

NOTE: Steps 5-6, *Alternator Removal and Installation* ([Click Here](#))

27. Install the accessory drive belt.

28. Install the condenser fan and reconnect the fan motor.

NOTE: *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))

29. Install the bulkhead braces.
NOTE: Step 5, *Radiator and A/C Condenser Fan, Motor, and Shroud Removal and Installation* ([Click Here](#))
30. Install the lower covers and splash shields.
NOTE: *Splash Shield Removal and Installation* ([Click Here](#))
31. Connect the transmission warmer hose.
NOTE: *ATF Warmer Removal and Installation* ([Click Here](#))
32. Install the bulkhead cover.
NOTE: *Front Bulkhead Cover Removal and Installation* ([Click Here](#))
33. Install the 12-volt battery.
NOTE: *Battery Removal and Installation* ([Click Here](#))
34. Install the air intake and filter box.
NOTE: *Air Cleaner Removal and Installation* ([Click Here](#))
35. Add engine oil.
NOTE: Engine Oil Replacement ([Click Here](#))
Capacity:
At Oil Change including Filter — 5.4L (5.7 US qt)
36. Add Coolant.
NOTE: *Coolant Replacement* ([Click Here](#))
Capacity:
At Coolant Change:
2016 — 8.7L (2.3 US gal)
2017–20 — 8.9L (2.35 US gal)
37. Install the steering joint and cover.
NOTE: *Steering Column Removal and Installation* ([Click Here](#))
38. Torque the spindle nut.
NOTE: *Front Driveshaft Removal and Installation* ([Click Here](#))
39. Install the passenger's side front wheel:
2016 — 108 N·m (80 lb-ft)
2017–20 — 127 N·m (94 lb-ft)
40. Purge the cooling system.
NOTE: *Coolant Replacement* ([Click Here](#))
41. Do the PCM reset. ([Click Here](#))
42. Do the CKP pattern learn. ([Click Here](#))
43. Do the Idle Speed Inspection ([Click Here](#))
44. Do the Ignition Timing Inspection ([Click Here](#))
45. Perform a wheel alignment.
NOTE: *Engine Removal and Installation* ([Click Here](#))
46. Do the Steering Angle Sensor Neutral Position Clear ([Click Here](#))