



IMPORTANT SAFETY RECALL NOTICE

NHTSA Campaign Number: **26V-385**

Internal Recall Number: **207**

July 17, 2026

To:

«CUSTOMER_NAME»
«CUSTOMER_ADDRESS_1»
«CUSTOMER_ADDRESS_2»
«CITY» «STATE» «ZIP»

THIS NOTICE APPLIES TO YOUR VEHICLE.

RE: **BODY SERIAL** «BODY_SERIAL» **CHASSIS SERIAL** «CHASSIS_SERIAL»

Dear Owner,

This notice is sent to you in accordance with the requirements of the National Traffic and Motor Vehicle Safety Act.

DESCRIPTION OF DEFECT

Winnebago Motorhomes has decided that certain 2026 – 2027 Winnebago Revel and Revel Sport fail to conform to Federal Motor Vehicle Safety Standard No. 110. "Tire Selection and Rims". These vehicles were manufactured February 19, 2025, through May 23, 2026. These dates are a broad overview and non-sequential.

Defect: Certain Winnebago vehicles fail to comply with FMVSS 110 due to an incorrect tire size listed. The tire is listed as R16 when actual tire size is R17.

SAFETY RISK

There is potential the customer could install an incorrect tire size, which may increase the risk of a crash.

REMEDY – WHAT WE WILL DO

Winnebago Motorhomes has provided you with the correct Tire and Loading Information Label with this letter to install or you may also have this label installed by an authorized dealer. If you choose to have a dealer install, please bring the label provided with this letter to your appointment.

This remedy will be performed at no charge to you.

The estimated labor time to complete this correction is approximately 12 minutes. However, due to service scheduling requirements, your dealer may need your vehicle for a longer period of time.



IMPORTANT SAFETY RECALL NOTICE

WHAT YOU SHOULD DO

Please follow the enclosed instructions to install the new label on your vehicle. Once the label has been installed, submit proof of installation of the new label using the QR Code.

If you choose to have a dealer install, please bring the label provided with this letter to your appointment.

You can contact your authorized Winnebago motorhome dealer immediately to schedule an appointment. You can locate a dealer using any of the following methods:

- Online: www.winnebago.com/shopping-tools/locate-a-dealer
- Email: customercare@wgo.net
- Phone: (641) 585-6939 or (800) 537-1885

ASSISTANCE AND RESOURCES FOR UNRESOLVED DEFECTS

If you bring your vehicle to the dealer on the agreed date and they do not perform this service on that date or within five (5) business days, contact Winnebago Customer Care at (800) 537-1885.

If you are unable to obtain the remedy without charge and within a reasonable time, you may file a complaint with:

Administrator, National Highway Traffic Safety Administration 1200 New Jersey Avenue S.E., Washington, DC 20590
Vehicle Safety Hotline: 1-888-327-4236 — TTY: (800) 424-9153 www.safercar.gov

ADDRESS OR VEHICLE CHANGES

If you have changed your address, sold, or traded your vehicle since purchase, provide the updated information at <https://www.winnebago.com/owners/owner-resources/second-owner-registration>

Lessor Notice (Required by Federal Law): Any vehicle lessor receiving this recall notice must forward a copy to the lessee within ten (10) days.

Presentation of this letter to the service center will assist in making the necessary corrections to your vehicle as promptly as possible.

We apologize for any inconvenience this may cause. This action has been taken in the interest of your safety and continued satisfaction. This letter does not constitute an acknowledgement of legal liability.

Winnebago Motorhomes

Forest City, Iowa 50436




IMPORTANT SAFETY RECALL NOTICE

Installation Instructions (You will need Isopropyl Alcohol and a lint free cloth for this procedure.)

1. Locate the Tire and Loading Information inside of the driver's side door jamb, on the forward face of the B-Pillar.



2. Remove and discard existing Tire and Loading Information Label, this will reveal the OEM chassis manufacturer's Tire Inflation Pressure Label.

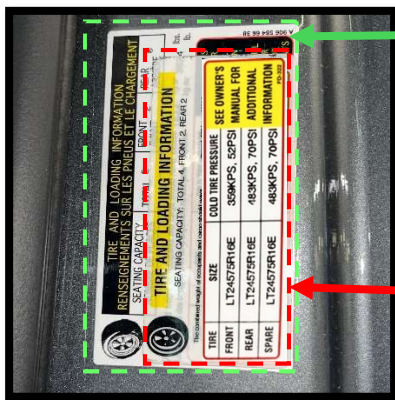

KEEP OEM Chassis Manufacturer's Tire Inflation Pressure Label .

REMOVE and discard existing Tire and Loading Information Label

3. Clean the face of the OEM Label with Isopropyl alcohol and ensure it is dry. Then cover the OEM Tire Inflation Pressure Label with the new Tire and Loading Information Label provided in this letter.





IMPORTANT SAFETY RECALL NOTICE

4. After installing the new label, scan this QR code to submit the required information.

