

May 22, 2026

Version 1

Safety Recall: 2021, 2023 TLX Seat Weight Sensor

APPLIES TO

Year	Model	Trim Level	VIN Range
2021, 2023	TLX	ALL	Check the iN VIN status for eligibility.

BACKGROUND

Affected vehicles may be equipped with seat weight sensors that are not built to proper specifications. Improperly built sensors could lead to cracking and/or a short circuit of the sensor, resulting in the illumination of the SRS warning light and the passenger airbag indicator remaining OFF. In certain collisions, these seat weight sensors may cause improper deployment of the front passenger airbags, increasing the risk of injury.

CLIENT NOTIFICATION

Owners of the affected vehicles will be sent a notification of this campaign. Do an iN VIN status inquiry to make sure the vehicle is shown as eligible. Some vehicles affected by this campaign may be in your new or used vehicle inventory.

Failure to repair a vehicle subject to a recall or campaign may subject your dealership to claims or lawsuits from the client and/or anyone else harmed as a result of such failure. To verify if a vehicle in inventory is affected, do a VIN status inquiry before selling it.

CORRECTIVE ACTION

Replace the seat weight sensors.

CLIENT INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by “do-it-yourselfers,” and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Acura automobile dealer.

WARRANTY CLAIM INFORMATION

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
7491E4	Replace seat weight sensors-power seat (includes seat calibration and DTC clear)	1.0 hr	6XW00	SOK00	B26014A	81136-TJB-A21

Skill Level: Repair Technician

Seat Weight Sensor Kit Serial Number

Enter the Seat Weight Sensor Kit serial number from the Seat Weight Sensor Kit label into the Replacement Serial Number field of the Parts Information section of the warranty claim.

NOTE:

- The Seat Weight Sensor Kit label should be affixed to the repair order by the technician.
- The claim may be rejected if a valid serial number is not included.

Parts Information						
Failed Part No. *		Failed Part Description *				
Replacement Serial No.						
Item	Replacement Part No. *	Quantity *	Unit Price	Unit Total	Description	
1						Delete
2						Delete
3						Delete
4						Delete
5						Delete
More >						
Materials Information						

PARTS INFORMATION

Refer to the Parts Information Bulletin 24-0012, *Multi-Model Seat-Weight Sensor Safety Recall Parts Availability*, for details regarding parts availability and ordering.

Part Name	Part Number	Quantity
Seat Weight Sensor Kit	04945-TJB-A00	1

TOOL INFORMATION

NOTE: Required tools were shipped as part of a previous campaign action. Replacement or additional tools are available through the Tool and Equipment Program.


Tool Name	Part Number	Quantity
Snap-On Torque Wrench	07AAA-TVAA400	1
Head, Box End (16MM)	07AAA-TG7A300	1
Head, Box End (14MM)	07AAA-TVAA200	1
SWS Fixture Guide D	07AAG-TVAA400	1

REPAIR PROCEDURE

1. Remove the label from the new seat weight sensor box and affix it to the repair order.

[illegible]

2. Remove passenger seat foot covers and seat mounting bolts.

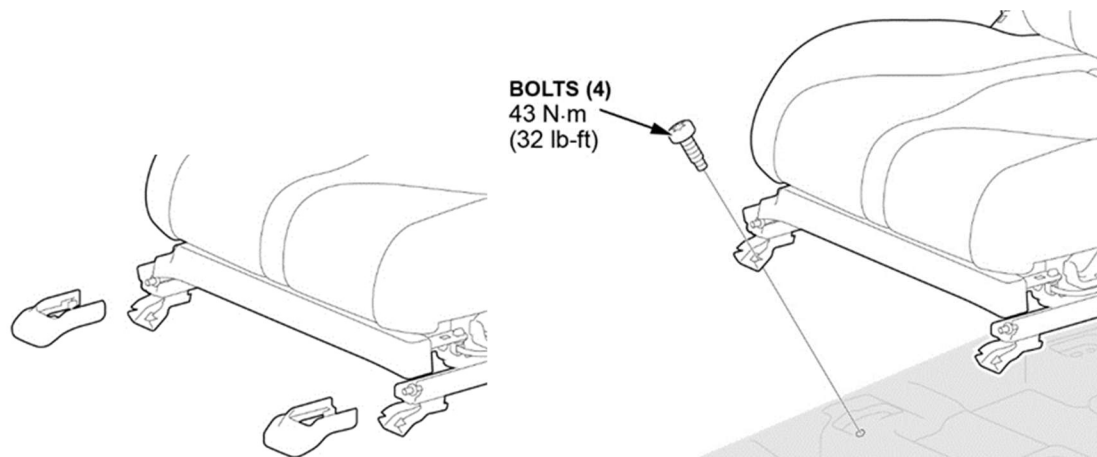


3. Move the front passenger's seat to the most forward position and raise the seat bottom to the highest position, then remove the rear mounting bolts.


4. Disconnect the negative terminal of the 12V battery.

NOTE: Wait **3 minutes** before beginning work.

5. Remove the right front seat belt bolt cover and front seat belt anchor bolt. (driver's side is shown).

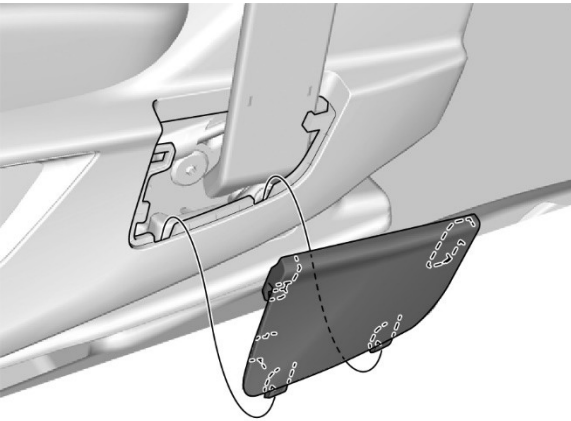


6. Disconnect the floor harness clip and disconnect the connectors underneath the seat.
7. Remove the seat from the vehicle.
8. Remove the right-side lower trim piece (one clip and one screw).

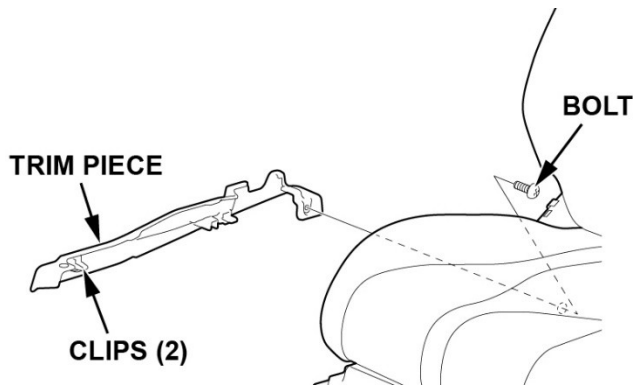

9. Remove the cover (2 screws).



10. Remove the two flange nuts holding the left side seat frame.

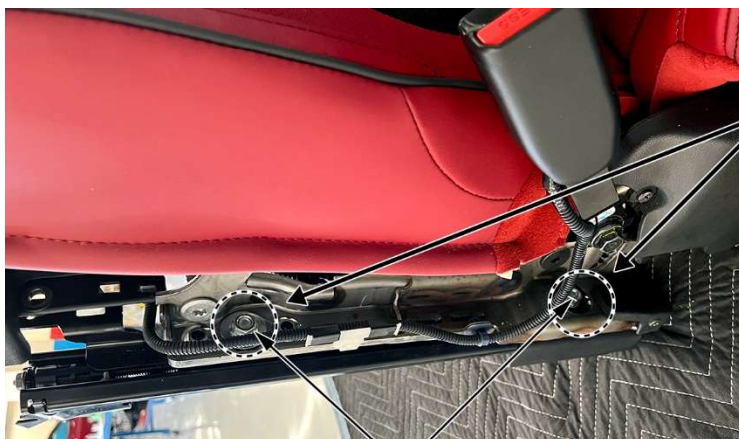

NUTS
55 N·m (40 lb-ft)

11. Remove the two bolts on the right side holding the frame.




BOLTS
25 N·m (18 lb-ft)

12. Remove the seat rail from the seat frame.




13. Mount the seat rail in the vehicle with the bolts and remove the 2 seat weight sensors, then discard the nuts and sensors.

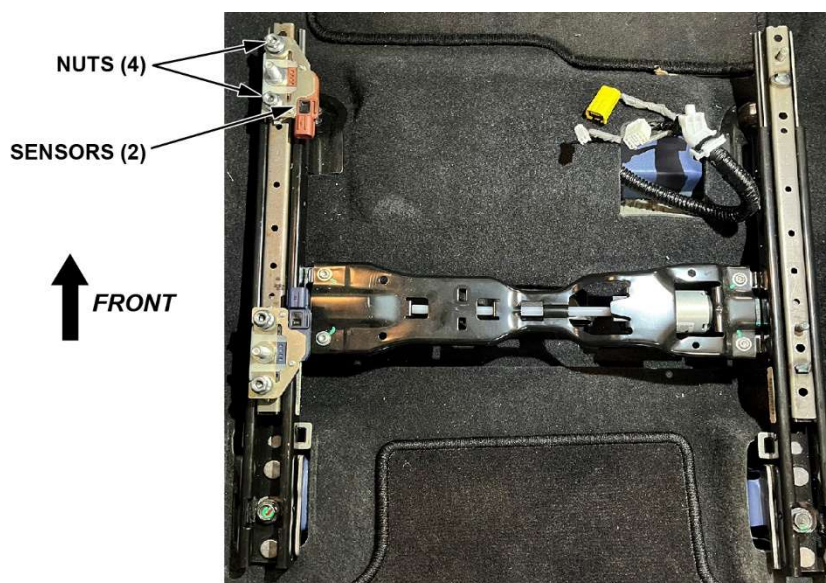

14. Loosely install the new seat weight sensors and nuts in the orientation shown.



NOTE: The new sensors have a number for installation in the correct location.

SENSOR POSITION 1
LEFT FRONT

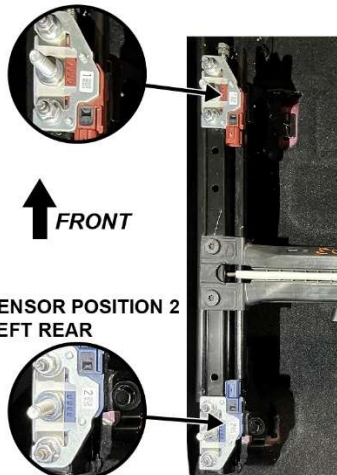


15. Place the **SWS Fixture Guide D** onto the new seat weight sensors with the tabs located to the inside of the seat track. With the guide properly seated on the new sensors, **torque nuts to 35 N·m (26 lb-ft) in the order shown on the SWS fixture guide, using the socket provided with the guide.**

NOTE: Use the socket provided with the guide.

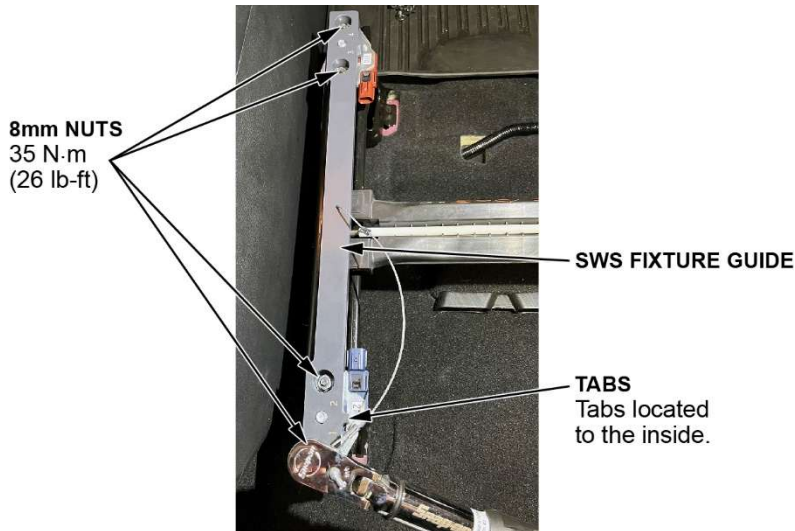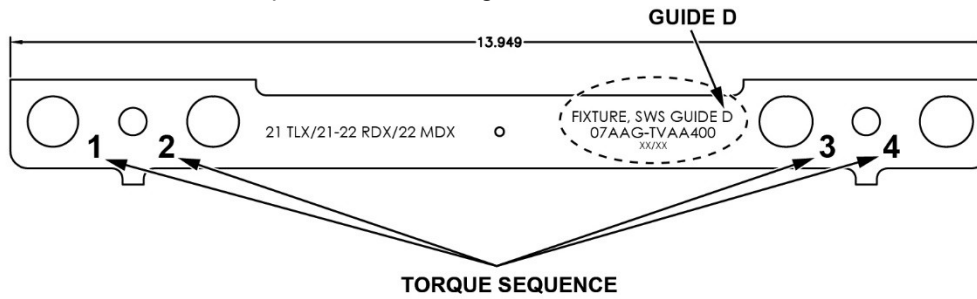

16. Install the seat rail to the seat frame with the metal collars.

NOTE: The silver washer, black collar for left front and black washer, silver collar for left rear.

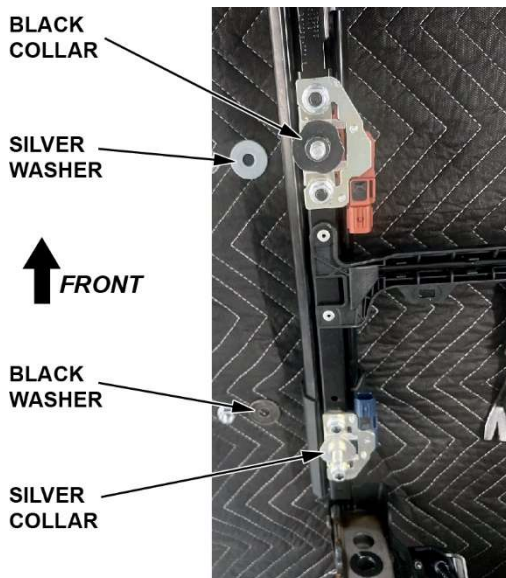

17. Using new washers and nuts, torque the left side seat frame flange nuts to **55 N·m (40 lb-ft)**. Torque the right-side bolts to **25 N·m (18 lb-ft)**.

NOTE: Use the Snap-On Torque Wrench (P/N: 07AAA-TVAA400) and the box-end head to tighten the seat rail nuts.




NUTS
55 N·m (40 lb-ft)



BOLTS
25 N·m (18 lb-ft)




18. Install the seat and hand tighten the bolts first, then torque them in the sequence shown **43 N·m (32 lb-ft)**.

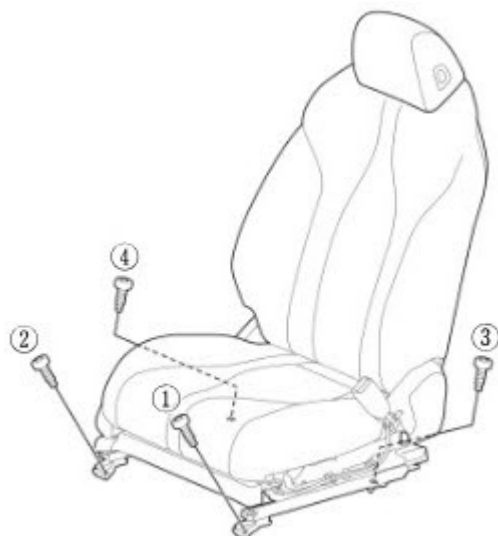

19. Install all remaining parts in the reverse order of removal.

20. Connect the terminal to the 12-volt battery.

NOTE: Do not hold the 12-volt battery sensor connector when installing the terminal to protect it from damage.

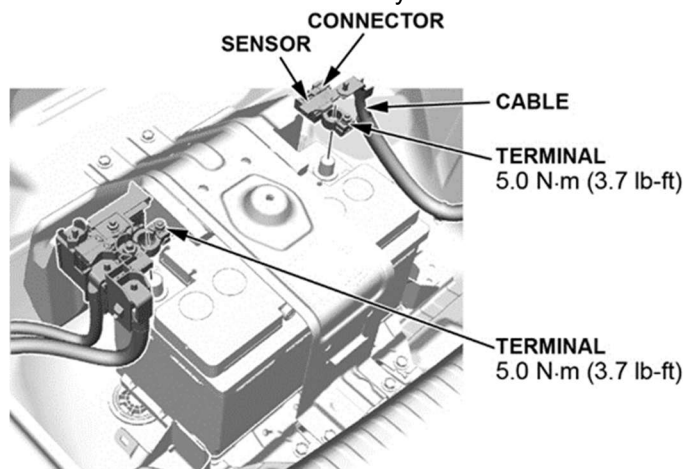

21. Do the *Front Passenger's Weight Sensor Initialization* ([CLICK HERE](#)).

22. Do the *Front Passenger's Weight Sensor Operation Check* after replacing front passenger's seat component(s) ([CLICK HERE](#)).