



**Countries:** CANADA, UNITED STATES, MEXICO **Document ID:** IK1201243  
**Availability:** ISIS, Bus ISIS, FleetISIS **Revision:** 1  
**Major System:** ENGINES **Created:** 11/20/2014  
**Current Language:** English **Last Modified:** 3/25/2015  
**Other Languages:** NONE **Author:** Aaron Mimbs  
**Viewed:** 920

[Less Info](#)
☒ Hide Details

Coding Information

|                      |                               |                                                          |                             |                  |                             |                         |                             |
|----------------------|-------------------------------|----------------------------------------------------------|-----------------------------|------------------|-----------------------------|-------------------------|-----------------------------|
| <b>Copy Link</b><br> | <b>Copy Relative Link</b><br> | <b>Bookmark</b><br><br><a href="#">View My Bookmarks</a> | <b>Add to Favorites</b><br> | <b>Print</b><br> | <b>Provide Feedback</b><br> | <b>Helpful</b><br><br>6 | <b>Not Helpful</b><br><br>3 |
|----------------------|-------------------------------|----------------------------------------------------------|-----------------------------|------------------|-----------------------------|-------------------------|-----------------------------|

**Title:** MaxxForce 7 Internal Coolant Leak Diagnostics and Repair

**Applies To:** ALL MaxxForce 7

## CHANGE LOG

03/20/2015 - ADDITIONAL CLEANING STEPS TO HELP ADDRESS FAILURES DUE TO BLOCK CLEANLINESS  
 02/16/2015 - Initial Article Release

## DESCRIPTION

This document will guide the user through internal coolant loss diagnostics and block repair steps for the MaxxForce 7.

This document replaces/retires: IK1201218 - 2010 V-8 Internal Coolant Leak Diagnostics

[Belzona Reforming and Protective Materials for Engines and Castings \(Testimonials\)](#)

## SYMPTOMS

**Diagnostic Trouble Code(s) & Dashboard Indicator Light(s):**

2007-2009 MaxxForce 7

| DTC/Light      | SPN/Light     | Description                                      |
|----------------|---------------|--------------------------------------------------|
| SPN 2323 FMI 1 | SPN 111 FMI 1 | ECL below Warning / Critical Level               |
| SPN 2321 FMI 0 | SPN 110 FMI 0 | Engine Coolant System above Critical Temperature |
| SPN 2322 FMI 7 | SPN 110 FMI 7 | Engine Coolant System above Warning Temperature  |

2010-2013 MaxxForce 7

| SPN/Light      | Description                                         |
|----------------|-----------------------------------------------------|
| SPN 111 FMI 1  | ECL below Warning / Critical Level                  |
| SPN 110 FMI 0  | Engine Coolant System above Critical Temperature    |
| SPN 110 FMI 15 | Engine Coolant System above Warning Temperature     |
| SPN 110 FMI 16 | Engine Coolant System Above OBD Maximum Temperature |

|                |                                                             |
|----------------|-------------------------------------------------------------|
| SPN 110 FMI 17 | Engine Coolant System below OBD monitoring temperature      |
| SPN 110 FMI 18 | Engine Coolant System below closed loop minimum temperature |

**Customer Observations or Concerns:**

- Coolant loss
- Coolant consumption
- Coolant in the oil
- Engine over-heat

**SPECIAL TOOLS / SOFTWARE**

| Tool Description                                     | Tool Number | Comments | Instructions                                               |
|------------------------------------------------------|-------------|----------|------------------------------------------------------------|
| EZ-TECH OR POCKETMAXX                                |             |          |                                                            |
| BORESCOPE                                            |             | LOCALLY  | <b>REQUIRED.</b><br>RECOMMEND: SNAP-ON<br>BORESCOPE BK6500 |
| COOLANT MANAGEMENT SYSTEM (CMT)                      | KL5007NAV   |          |                                                            |
| SMALL ABRASIVE FLAP DISC                             |             | LOCALLY  | No larger than 20mm in diameter                            |
| NOZZEL SLEEVE SEATING BRUSH                          | ZTSE4391    |          | For scrubbing coolant cavity                               |
| PRESSURE TESTER                                      | ZTSE2384    |          |                                                            |
| 10MM SOCKET                                          |             | LOCALLY  |                                                            |
| 13MM SOCKET                                          |             | LOCALLY  |                                                            |
| 8MM HEX BIT SOCKET                                   |             | LOCALLY  |                                                            |
| PUNCH                                                |             | LOCALLY  |                                                            |
| HAMMER                                               |             | LOCALLY  |                                                            |
| PRY BAR                                              |             | LOCALLY  |                                                            |
| PLIERS                                               |             | LOCALLY  |                                                            |
| HEAT GUN                                             |             | LOCALLY  | <b>REQUIRED</b>                                            |
| ABRASIVE DISC (SCOTCH-BRITE)                         |             | LOCALLY  | Removing paint from block (External)                       |
| FREEZE PLUG INSTALLER                                | ZTSE4509    |          |                                                            |
| STANDARD PLUG                                        |             | LOCALLY  |                                                            |
| DISPOSABLE MEASURING SPOON<br>(1 TABLESPOON - 15 mL) |             | LOCALLY  | MUST BE 1 TABLESPOON<br>(FUTURE KITS MAY CONTAIN)          |

**SERVICE PARTS INFORMATION**

| Kit Description                         | Part Number | Quantity Required | Notes                                                                                                           |
|-----------------------------------------|-------------|-------------------|-----------------------------------------------------------------------------------------------------------------|
| 1KG BELZONA 1391 HT CERAMIC EPOXY       | 2514564C1   | 150 grams         | Kit comes in 1kg quantities, dealer must divide epoxy appropriately for each repair (5-6 repairs per container) |
| KIT, MXF7 BLOCK REPAIR (MECHANICALS)    | 2514509C91  | 1 Per Repair      | <a href="#">Kit Contents (Click Here)</a>                                                                       |
| BREATHING, ASSY IMPACTOR                | 7085773C92  | As Needed         | Follow article diagnostics (2010-2013 MF7)                                                                      |
| INTERNATIONAL T-442 RTV SILICONE RUBBER | 1830858C1   | As Needed         |                                                                                                                 |

**DIAGNOSTIC STEPS**

| Step | Action | Decision |
|------|--------|----------|
|      |        |          |

|          |                                                                                                                                                    |                               |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>1</b> | <b>Initial checks</b><br><br>Obtain vehicle health report using EZ Tech or Pocketmaxx<br><br>Has vehicle health report been obtained and uploaded? | <b>Yes.</b> Proceed to Step 2 |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|

| Step     | Action                                                                                                                         | Decision                                                                                  |
|----------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>2</b> | <b>Contamination verification</b><br><br>Drain the oil into a clean pan.<br><br>Is coolant visually present in the engine oil? | <b>Yes.</b> Proceed to Step 3                                                             |
|          |                                                                                                                                | <b>No.</b> Follow Coolant System symptom section of the <i>Engine Diagnostic Manual</i> . |

| Step     | Action                                                                                                                                                                                                                                                                                                                                                        | Decision                                                                                                                            |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>3</b> | <b>Leak Inspection</b><br><br>Remove the engine oil pan per instruction is the <i>Engine Service Manual</i><br><br>Using tool ZTSE2384 - Radiator Pressure Test Kit, pressurize the cooling system per procedure listed in the <i>Engine Diagnostic Manual</i> and inspect for leaks near cylinder 7.<br><br>Is there a coolant leak present near cylinder 7? | <b>Yes.</b> Proceed to the <a href="#">Repair Steps</a> section of this document                                                    |
|          |                                                                                                                                                                                                                                                                                                                                                               | <b>Leaks but Not Near Cylinder 7.</b> Step 6 - <b>NOTE: Repairing the engine may still be directed but in a different location.</b> |
|          |                                                                                                                                                                                                                                                                                                                                                               | <b>No Leaks.</b> Follow Coolant System symptom section of the <i>Engine Diagnostic Manual</i>                                       |

| Step     | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Decision                 |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>4</b> | <b>Post Repair Diagnostics - Crankcase Pressure</b><br><br><b>Perform the following: Crankcase Pressure Test at engine operating temperature of 158°F (70°C) or higher.</b><br><br>1. Ensure the oil level is not above the full mark.<br>2. Remove the oil level gauge from the dipstick tube. Attach 11/16" hose with clamps and 1/4" pipe adapter to magnahelic gauge on gauge kit ZTSE4409.<br>3. Start engine and run at high idle (no load) RPM. Allow reading to stabilize, before recording reading.<br><br>Refer to the <a href="#">Diagnostic Manual</a> .<br><br><b>Specification:</b> at High Idle, Below 24" of H <sub>2</sub> O | Document Result - Step 5 |
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          |

| Step     | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Decision                                                                                                                                                                                                                                      |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>5</b> | <b>Post Repair Diagnostics - Blow-By</b><br><br><b>Perform the following: Blow-By Test at engine operating temperature of 158°F (70°C) or higher.</b><br><br>1. Ensure the engine oil level is not above the full mark and the oil level gauge is secured.<br>2. With engine OFF, remove oil fill cap.<br>3. Install crankcase pressure test adapter ZTS4284 to oil fill tube.<br>4. Connect orifice ZTSE4146A to crankcase pressure test adapter ZTSE4284.<br>5. Connect a line from the orifice ZTSE4146A to the magnahelic gauge on the gauge kit ZTSE4409.<br>6. Using a standard plug, block off the road draft tube, located on the bottom right side of the engine. | <b>Crankcase Pressure:</b> In Spec<br><b>Blow-By:</b> In Spec                                                                                                                                                                                 |
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | No action necessary, complete any other required work and release unit to the customer.                                                                                                                                                       |
|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Crankcase Pressure:</b> Out of Spec<br><b>Blow-By:</b> In Spec<br><br><b>Remove Crankcase Breather:</b><br><br><u>Part Number 7085773C92:</u> Clean breather of sludge or debris. If uncleanable or no sludge resent replace the breather. |

|                                                                                                                                                                                                                                    |                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <p>7. Run engine at high idle (no load) RPM. Monitor magnahelic gauge and record high idle blow-by pressure.</p> <p>Refer to the <a href="#">Diagnostic Manual</a>.</p> <p><b>Specification:</b> at High Idle, Below 9" of H2O</p> | <p>Part Number 7085773<b>C91</b>: Replace Breather with 7085773<b>C92</b></p> <hr/> <p><b>Blow-By: Out of Spec</b></p> <hr/> <p>Step 6</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|

| Step            | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Decision                                                                                                                                   |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>6</b></p> | <p><b><u>Engine iApproval Process</u></b></p> <p>Open an engine replacement iApproval using the Service Portal be sure to include the following information</p> <ol style="list-style-type: none"> <li>1. Fill out a detail description of the issue.</li> <li>2. List any active &amp; Inactive DTCs</li> <li>3. Attach images of the leak and if the repair was attempted pictures of the cleaned galley and epoxy in the galley</li> <li>4. Obtain and attach the engine parameter file</li> <li>5. Note any other details observed (over-heat, over-speed, etc.)</li> </ol> | <p><b>Follow Navistar's Technical Support Teams directions. This may include following through with the remainder of this article.</b></p> |

## REPAIR STEPS

### WARNING

To prevent personal injury or death, read all safety instructions in the "Safety Information" section of the diagnostic manual.

### WARNING

Park vehicle on hard flat surface, turn the engine off, set the parking brake, and block the wheels to prevent the vehicle from moving in either direction. Failure to do so may result in property damage, personal injury, and / or death.

### WARNING

To prevent personal injury or death, make sure the engine has cooled before removing components.

### WARNING

To prevent personal injury or death, do not let engine fluids stay on your skin. Clean skin and nails using hand cleaner and wash with soap and water. Wash or discard clothing and rags contaminated with engine fluids.

### WARNING

This procedure may require the usage of an open flame and flammable materials. Please use extreme caution and ensure full dissipation of flammable substances before using an open flame.

### WARNING

Always wear safe eye protection when performing vehicle maintenance. Failure to do so may result in personal injury and / or death.

## FAILURE CONCLUSIONS:

Coolant leaks were a result of perforation due to corrosive attack.

## TEST/ANALYSIS RESULTS:

All of the failures occur only in a low spot of the water jacket of Cylinder #7 near the coolant plug shown in Figure 1. Notable amounts of debris can also be found in the coolant passage.

The failures were cavities of varying size as shown in Figure 1. When a failure occurs, a cavity would grow large enough to perforate the wall separating the coolant and oil, allowing coolant from the water jacket to enter the oil passage.

## SUMMARY

The failures were consistently in the area of the coolant plug only near cylinder #7. Small cavities and large cavities had similar graphite morphology and had corroded surfaces. The non-failed parts had an as-cast surface in the typical failure areas and no failure inducing defects were found. Filling the effected area with Belzona 1391 HT Ceramic Based Epoxy prevents coolant leakage and further corrosion of the block.

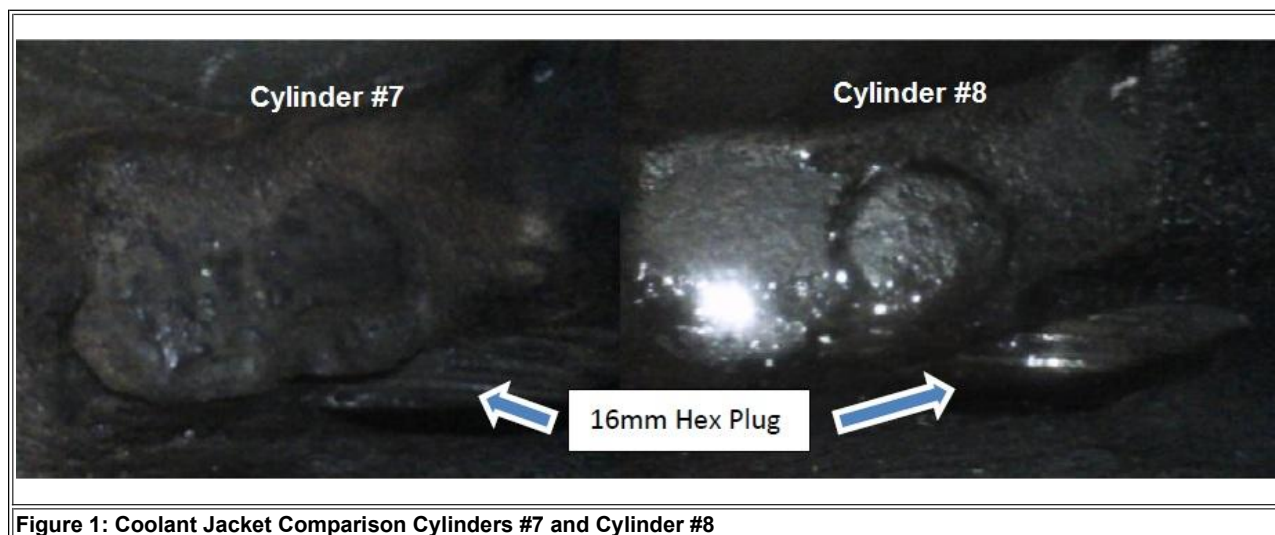




Figure 1: Coolant Jacket Comparison Cylinders #7 and Cylinder #8


### Before You Begin

The coolant cavity has to be clean and dry for the epoxy to adhere to the surface. Please do not guess or assume the cavity is clean, be diligent with the prep work. This repair works; failures occur by not following the cleaning and inspecting steps and

the customer's truck will be down again for a short block engine replacement with even more time lost. All repair failures will be looked at by Navistar to determine the root cause of the repair failure.

#### Repair Failure Examples

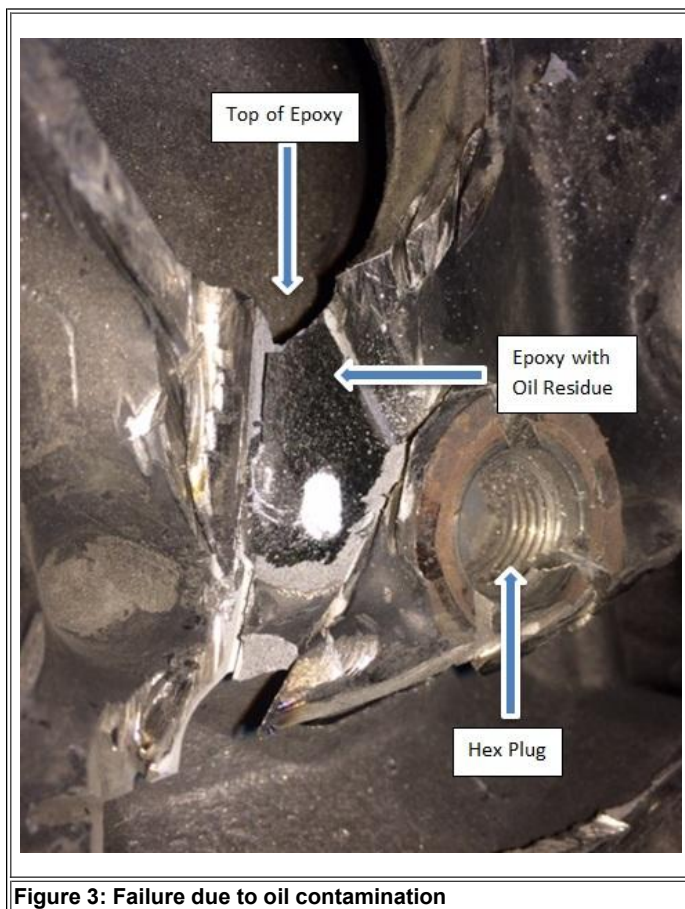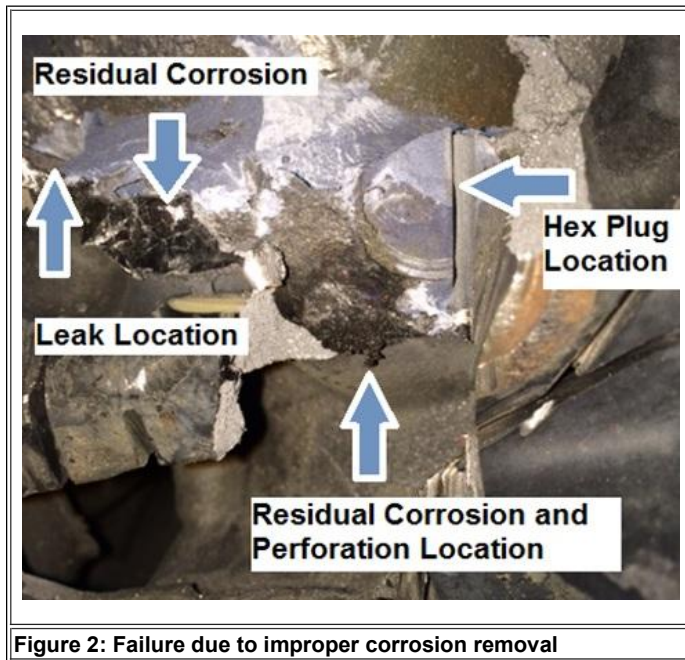

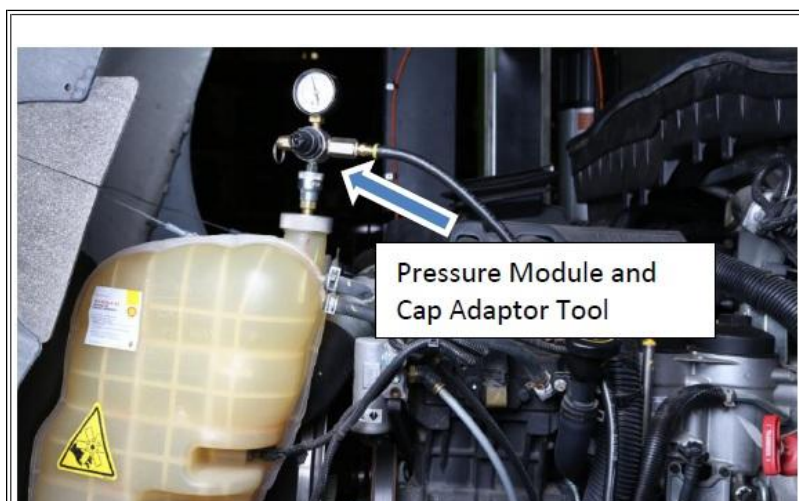**REPAIR PROCEDURE:****Figure 4: Coolant Management Tool Pressure Module**

1. Install coolant management tool Cap Adapter (KL5004NAV), Pressure Module (KL5006NAV), and 20 Gallon Tank/Cart Assembly (KL5003NAV). Attach shop air to the Pressure Module. (If necessary change out the drain cock to the quick coupler)


**Figure 5: Coolant Management Container Valve**

2. Position the valve to "DRAIN VEHICLE" on the coolant cart and open the valve on the Pressure Module allowing the pressure to force the coolant to fully drain, shut off the pressure, allow the pressure to finish releasing, and close the coolant cart valve. Inspect the drained coolant for heavy oil contamination, if contaminated return to diagnostic [STEP 6](#). Trace amounts of oil are ok.



**Figure 6: Power Steering Pump Bolts**

**NOTE: 2010-2013 MaxxForce 7: Do not drain the power steering system, it is not required.**




**Figure 7: Power Steering Line Support Brackets**


**4. Remove the Power Steering Line Support Brackets to free the pump.**



**Figure 8: Move Power Steering Pump Away from Working Area**


5. Swing the Power Steering Pump out of the repair area.




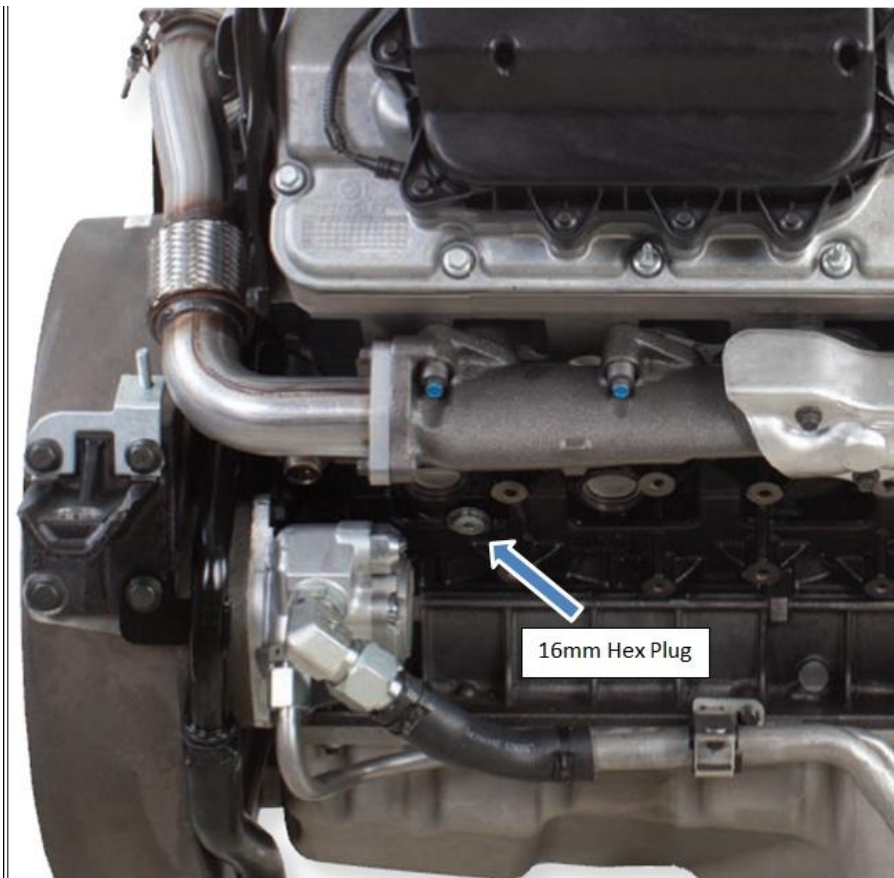


**Figure 9: 16 mm Hex Plug Location**

6. Using a 8mm Hex Bit Socket remove the 16mm Hex Plug from the engine block.



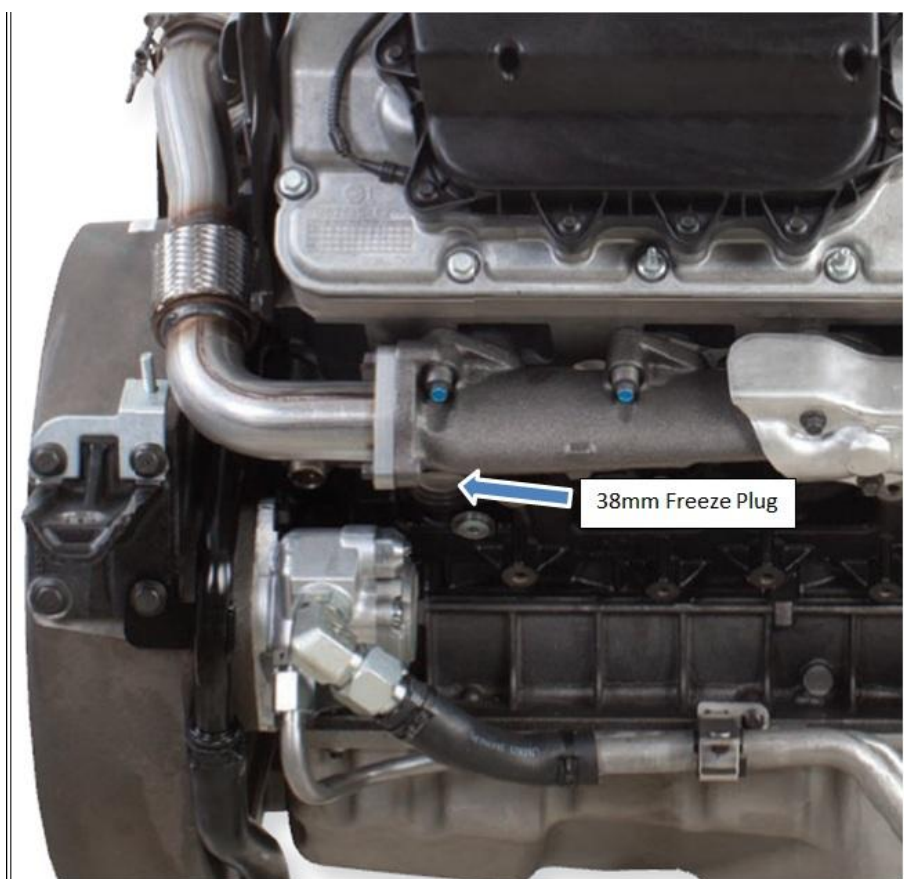


**Figure 10: 38mm Plug Location**

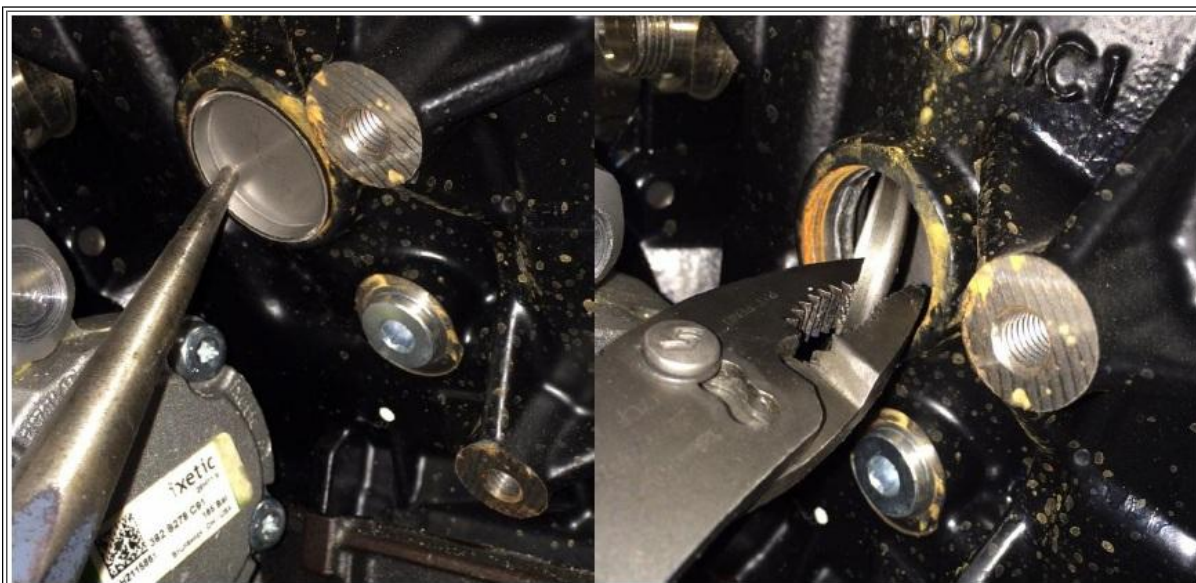


**Figure 11: Freeze Plug Removal**

7. Using a small hammer and punch remove the 38mm Freeze Plug from the block. Strike the plug near one of the edges, the freeze plug should spin sideways allowing for removal with pliers. (Note: In some instances the plug may push all the way into the block. To retrieve, fetch by hand and pull to the opening, grasp with the pliers and pull it out.) After pulling the 16mm Hex plug and the 38mm freeze plug, if oil/coolant mixture pours out of the plug attempt an initial flush of the area, if oil and coolant continues to pour into the repair area return to diagnostic [STEP 6](#).

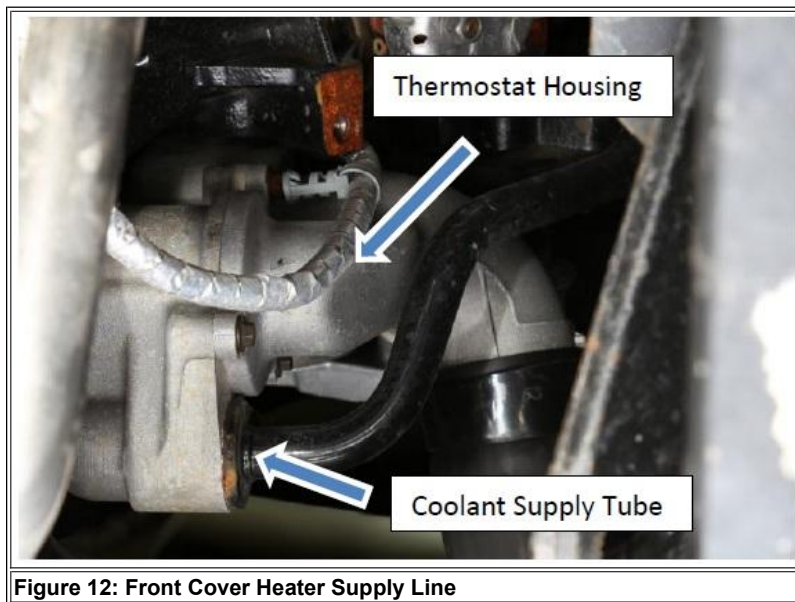

8. Using a catch pan, remove the coolant supply tube next to the thermostat housing from the bottom passenger side of the front cover to allow further coolant drainage.

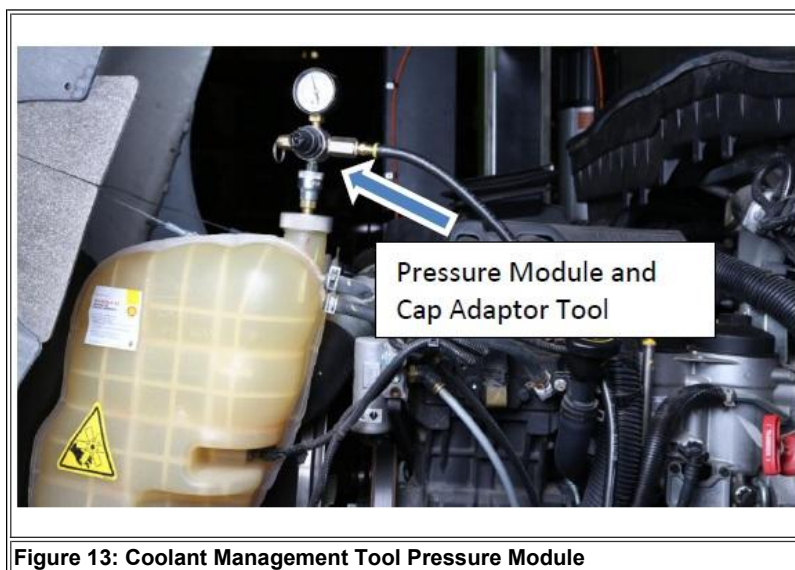


9. Using the CMT pressure regulator, reopen the valve to blow air through the entire block. Allow the air to continue flowing during the entire block preparation portion of this repair.






**Figure 14: Metal Debris Removal**

**10.** Going through the 38mm freeze plug opening, clear any debris in the galley by pushing, flushing, and blowing it out of the 16mm hole (Using your hand will be required to clear the area of debris).

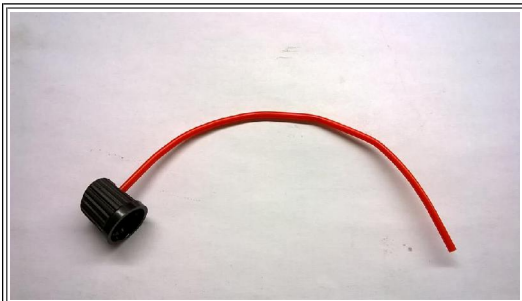

**Figure 15: Brake Cleaner Straw**

**11.** Use aerosol powered brake cleaner to flush galley and remove any oily deposits. Bending the provided Brake Cleaner straw in an arc may be required to blow downward into the cavity when going through the 38mm freeze plug opening. It is also necessary to spray upward (Left right and middle) in the block to draw down any coolant resting above the galley.





**Figure 16: Using ZTSE4391 to scrub the cavity**

**12.** Using ZTSE4391 scrub the cavity (If necessary degrease and clean the brush before using). Spray a small amount of WD-40 into the cavity to further break down the corrosion build-up and aid in the scrubbing process.



**Figure 17: Wiping the cavity clean**

**13.** Using a clean rag or a clean paper towel wipe the inside of the cavity to remove deposits that could not be flushed. Repeat steps 12 and 13 until no more debris can be removed. Once acceptable, degrease the cavity again with brake cleaner to remove the WD-40 deposits, make sure to wipe it dry several times, preferable with a non-shedding rag.



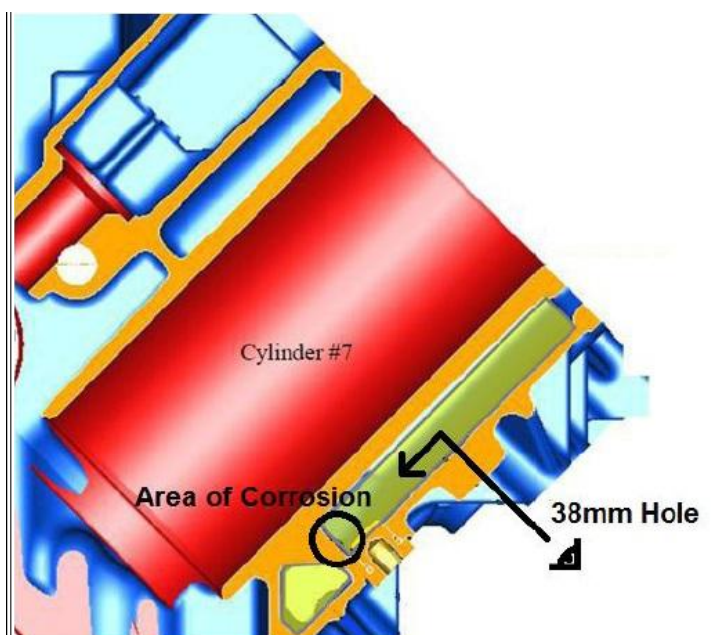


Figure 18: Corrosion Location



Figure 19: (LEFT) Coolant Galley with Moisture and Missed Debris (RIGHT) Coolant Galley After Cleaning and Drying

14. **REQUIRED:** Use a bore scope to visually inspect for remaining debris and fluids. If a notable amount of rust or corrosion deposits are remaining on the galley walls use a pick, or if possible an abrasive pad to clear as much as possible off the walls, rinse and inspect again. If no bore scope is available one must be borrowed or purchased for inspection of the galley. **Once the galley is acceptable please take a picture with the bore scope for documentation.** Failure to do so may result in this repair failing; causing excessive down time for the customer. This step is REQUIRED.

#### RECOMMENDATION

SNAP-ON Bore scope Item BK6500 has a forward and side viewing camera which allows for easy viewing of the affected area.

#### ATTENTION

THIS AREA MUST BE COMPLETELY CLEAN, DRY AND REMAIN DRY BEFORE APPLYING THE EPOXY. ANY MOISTURE THAT COMES INTO CONTACT WITH THE EPOXY WILL INHIBIT THE CURING EFFECT. SEE FIGURE 16 ABOVE.

#### ATTENTION

IN MANY CASES A SMALL AMOUNT OF COOLANT MAY LEAK BACK INTO THE CAVITY IF THE EPOXY IS INJECTED OVER A TRAIL OF COOLANT, THIS TRAIL WILL CREATE A GAP BETWEEN THE EPOXY AND BLOCK SURFACE ALLOWING THE COOLANT TO LEAK BACK INTO THE CAVITY

15. Shut off the valve on the CMT tool to cease air flow through block. If coolant is stirred back into the cavity Brake Cleaner will need to be used again to remove coolant residue. A heat gun may also be used to assist with drying the area cycling it between both openings. Wait 10 minutes, scope the area again for signs of moisture. Another method of drying is to use a very clean shop rag and stuff it in the area to absorb moisture. If coolant continues to run into the pocket, stuffing a rag above, to the left, and to the right of the cavity should prevent coolant run-back long enough for epoxy injection and preliminary curing. (NOTE: If repairing an external coolant leak blow through the perforation to clear any moisture out of the hole).

**WARNING**

**DO NOT LET THE RAG SIT IN THE AREA TO BE EPOXIED. THE RAG SHOULD BE STUFFED AROUND THE CAVITY, SURROUNDING IT TO SOAK UP MOISTURE. IF RAGS ARE USED, REMOVE ALL OF THEM FROM THE BLOCK ONCE THE EPOXY HAS CURED.**



Figure 20: Install and Torque New Hex Plug

16. Install the new 16mm Hex Plug provided in the repair kit and torque to 20 ft-lb.

**ATTENTION****FOR BEST RESULTS****Do not apply when:**

- i) The temperature is below 50°F (10°C) or the relative humidity is above 90%.
- ii) The substrate temperature is less than 5°F (3°C) above dewpoint.
- iii) Rain, snow, fog or mist is present.
- iv) There is moisture on the metal surface or is likely to be deposited by subsequent condensation.
- v) The working environment is likely to be contaminated by oil/grease from adjacent equipment or smoke from kerosene heaters or tobacco smoking.



Figure 21: Belzona 1391 Epoxy Mixing Supplies

17. Gather the kit 2514509C91 for mixing the Epoxy (Belzona 1391 Base and Solidifier, Gloves, Mixing Cup, Mixing Stick, and 1 Tablespoon (Obtained Locally)).

#### WARNING

**READ THE ENTIRE MIXING AND INJECTION SECTION BEFORE MIXING THE EPOXY. ONCE THE EPOXY HAS BEEN MIXED IT MUST BE INJECTED INTO THE BLOCK IMMEDIATELY. FAILURE TO DO SO WILL RESULT IN THE EPOXY NOT SETTLING PROPERLY AND FAILURE OF THIS REPAIR.**

#### ATTENTION

##### MIXING SMALL QUANTITIES

For mixing small quantities of Belzona® 1391 use:

5 parts Base to 1 part Solidifier by volume

13 parts Base to 1 part Solidifier by weight.



Figure 22: Belzona 1391 Solidifier (0.6 of a Tablespoon)

**18.** Measure out 0.6 of a Tablespoon (Just over half of the tablespoon) of the blue solidifier and pour it into the mixing cup. If measuring by weight this is equivalent to 9.1 grams of the solidifier.



**Figure 23: Clean Tablespoon to Measure Epoxy Base (3 Tablespoons)**

**19.** Clean the tablespoon so it does not mix the Solidifier into the bulk Epoxy Base container. Failure to do so will result in curing and waste of the epoxy base.



**Figure 24: Scrape Epoxy Base into Mixing Cup**


**20.** Measure out 3 tablespoons of the epoxy base and add to the cup with the solidifier, scrape out as much from the spoon as possible. If measuring by weight this is equivalent to 119 grams of the base or a combined weight of 128 grams. You must discard the measuring spoon if it cannot be fully cleaned. **DO NOT REUSE A DIRTY SPOON OR A SPOON WITH EPOXY RESIDUE.**

**Epoxy Working Life** (NOTE THE SIGNIFICANT TEMPERATURE EFFECT)

| Temperature             | 50F      | 68F      | 77F     | 85F      | 105F     |
|-------------------------|----------|----------|---------|----------|----------|
| Use All Material Within | 80 mins. | 40 mins. | 30 mins | 20 mins. | 10 mins. |

**Figure 25: Fully Mixed Belzona 1391 Ceramic Epoxy**

21. Using the provided mixing stick; thoroughly mix the epoxy until the blue solidifier is no longer visible and the epoxy has become a consistent color. Scraping the bottom and sides of the mixing cup will be required to fully mix the epoxy.

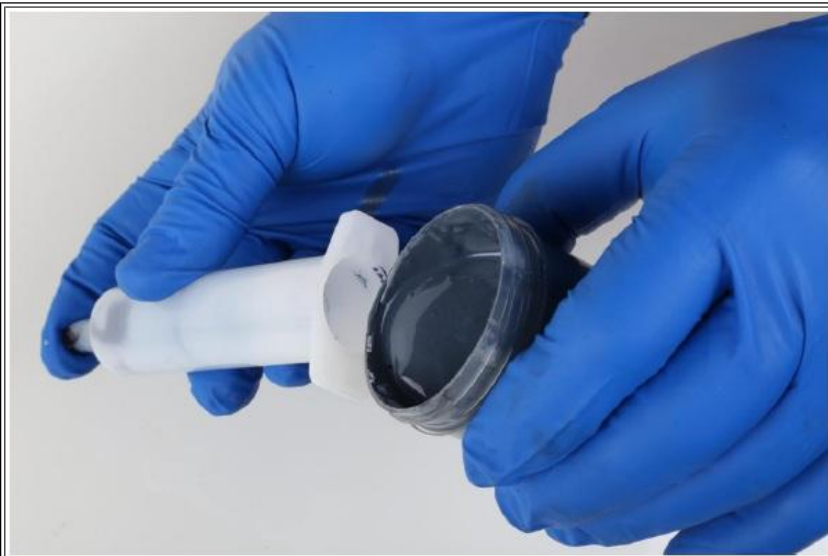**Figure 26: Pouring/Scraping Epoxy into Syringe**

22. Pour and scrape as much of the freshly mixed epoxy into the back of the clean syringe (You will be mixing more epoxy than necessary for this repair). Request assistance with this step if needed, the cup used will be different than displayed, the provided cup rim can be slightly bent into a spout for ease of pouring. This repair will require the usage of a nearly full syringe. (NOTE: If repairing an external coolant leak you will need to save the epoxy in the cup for later use, do not throw away or contaminate, if epoxy becomes contaminated mix another small batch 5:1 by volume).

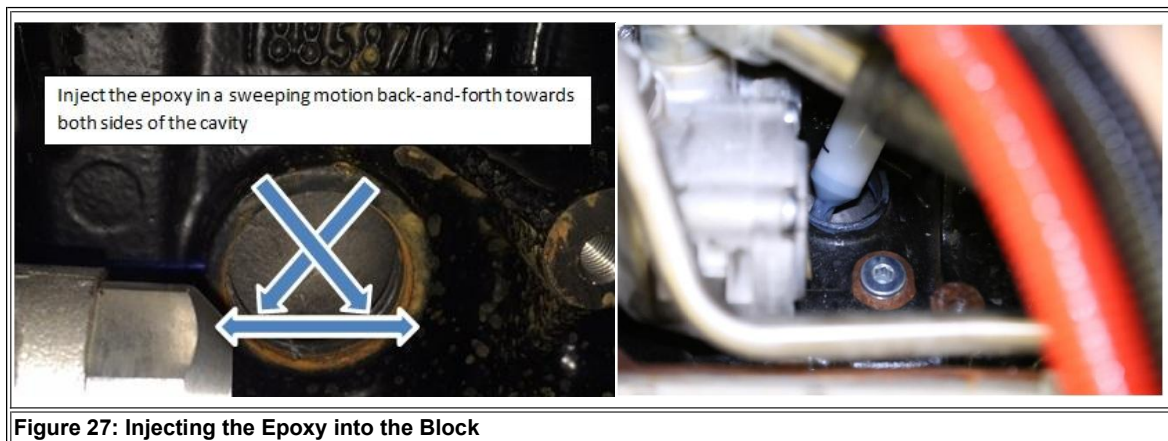


Figure 27: Injecting the Epoxy into the Block

#### ATTENTION

IF INJECTED WITHIN A REASONABLE AMOUNT OF TIME OF MIXING THE EPOXY IS SELF-LEVELING AND WILL RUN INTO THE OPEN CAVITIES OF THE CORRODED AREA. THE EPOXY MUST BE INJECTED INTO THE BLOCK SLOWLY TO ALLOW AMPLE SETTLING TIME.

23. Insert the opened end of the syringe into the 38mm opening facing downward as much as possible to the corroded area. Begin **very slowly** injecting the epoxy into the cavity allowing ample settling time. Inject the epoxy in a sweeping motion back and forth (left to right) and fill the entire cavity. A majority of the epoxy should be injected to the right of the opening. Fill the cavity all the way up to the freeze plug opening. If it does not fill all the way up, quickly mix more epoxy and inject it into the block.

24. Once injected, clean off the 38mm opening of any residual epoxy to prevent hardening and inability to install the new freeze plug. Depending on the volume of epoxy injected the opening may require multiple wipe downs. The use of a bore scope to inspect the epoxy settlement is recommended. If the epoxy has not settled fully in the cavity, using a clean glove gently work the epoxy down into the galley to the left and right, limit touching the epoxy as much as possible to avoid contamination.



Figure 28: Use a Heat gun to Cure the Epoxy

**ATTENTION**

TEMPERATURE HAS A LARGE EFFECT ON EPOXY CURING. IF ALLOWED TO DROP BELOW 50°F THE EPOXY WILL NOT CURE PROPERLY. USE A HEAT GUN TO KEEP THE AREA HOT DURING CURE TIME (PREFERABLY ABOVE 100°F). THE USE OF A HEAT GUN IS REQUIRED TO MEET THE SRT CURING TIME OF 3 HOURS. IF A HEAT GUN IS NOT USED THE EPOXY MUST CURE FOR 8 HOURS ABOVE 60°F.

**WARNING**

WHEN DEALING WITH HEAT SOURCES USE PROPER PRECAUTIONS TO PREVENT DAMAGE TO VEHICLE, COMPONENTS, OR PERSONAL INJURY.

25. Allow the epoxy to cure with the heat gun continuously applying heat for 3 hours (Warranty will pay for the 3 hours of bay usage), if curing is in question feel the epoxy for rigidity in the mixing container and in the block. If no heat gun is available cure time will take a minimum of 8 hours and temperatures must remain above 60°F.

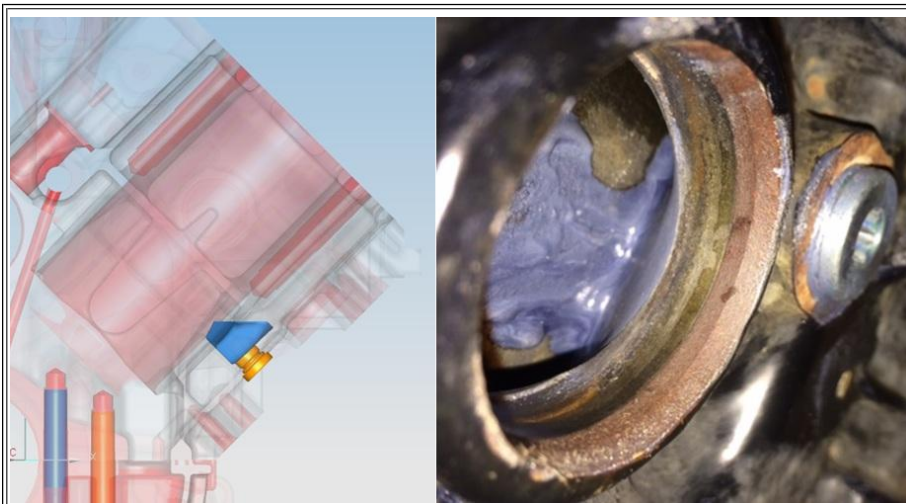


Figure 29: Completed Repair



Figure 30: Flap Disc

26. Once cured, clean off the freeze plug opening with a flap disc to remove any residual epoxy and rust. Once cleaned, install the new 38mm freeze plug using ZTSE4509. A 24mm socket may be used in substitution if unavailable.

27. Pressure test the cooling system, use soapy water to confirm the freeze plug does not leak. If it passes, continue to the next step. If the engine fails the pressure test, fill with water and check for leakage from the repair location, if found in the same location remove the freeze plug and take a bore scope image of the epoxy. Return to diagnostic [STEP 6](#) and attach the image of the cleaned galley and of the epoxy in the galley for warranty purposes. If no leak is found, search for the source of pressure loss.

**WARNING**

**IN SOME INSTANCE OIL MAY HAVE EXITED THE ENGINE COVERING COMPONENTS AND MANIFOLDS IN OIL. THIS OIL MUST BE CLEANED OFF BEFORE ENGINE OPERATION, FAILURE TO DO SO MAY RESULT IN FUME IGNITION RESULTING IN SEVERE PERSONAL INJURY, DEATH, AND/OR EQUIPMENT DAMAGE.**

28. Upon passing the pressure test, the cooling and oil system may require flushing with a cleaner for contamination. These two systems can be flushed at the same time. Use Restore Plus or other preferred solvent for the cooling system, once complete drain and vacuum fill with new coolant. Only flush the oil system if required, mix by volume kerosene OR diesel fuel (5 Quarts or 1.25 Gallons) with 15 Quarts of oil. Run the engine at 1500 rpms for 20 minutes to flush both systems.

29. If this repair was an external coolant leak, paint the external epoxy black to match the block and for an added layer of protection from the elements.

30. Once complete 2007-2009 MaxxForce 7 release to customer; 2010-2013 MaxxForce 7 return to diagnostic [STEP 4](#).

## **WARRANTY INFORMATION**

### **Warranty Claim Coding:**

|               |                 |
|---------------|-----------------|
| <b>Group:</b> | 12000 - Engine  |
| <b>Noun:</b>  | 051 - Crankcase |

### **Standard Repair Time(s):**

| Step                                         | Description                                                                  | Engine    | SRT                       | Hours |
|----------------------------------------------|------------------------------------------------------------------------------|-----------|---------------------------|-------|
| ELECTRONIC ENGINE PERFORMANCE, DIAGNOSE      | Visual inspections (Performance diagnostics)                                 | All       | <a href="#">MANUAL</a>    | 0.2   |
| OIL PAN AND/OR GASKET REPLACE                | See manual for proper coding                                                 | All       | <a href="#">MANUAL</a>    | 2.2   |
| INTERNAL BELZONA REPAIR PROCESS              | Power steering pump, cooling system drain, Block prep, injection, and curing | All       | T-TIME                    | 4.3   |
| COOLING SYSTEM, FLUSH                        | Flushing the cooling system                                                  | All       | <a href="#">A09-280</a>   | 1.0   |
| CRANKCASE BREATHER HOUSING ASSEMBLY, REPLACE | See manual for proper coding                                                 | EPA10 MF7 | <a href="#">MANUAL</a>    | 0.6   |
| ENGINE OIL AND FILTER, CHANGE                | Claim twice for flushing                                                     | All       | <a href="#">A12-1889A</a> | 0.4   |
| OIL SYSTEM, FLUSH                            | Time for flushing                                                            | All       | T-TIME                    | 0.3   |
| CRANKCASE PRESSURE TEST                      | Crankcase pressure                                                           | EPA10 MF7 | <a href="#">MANUAL</a>    | 0.2   |
| BLOW-BY TEST                                 | Engine blow-by                                                               | EPA10 MF7 | <a href="#">MANUAL</a>    | 0.3   |

### **Special Requirements:**

Engine Replacement Requires an iApproval

## **OTHER RESOURCES**

[Master Service Information Site](#)

[Belzona Reforming and Protective Materials for Engines and Castings \(Testimonials\)](#)

[Belzona 1391 Product Data](#)

[Belzona 1391 Instructions for Use](#)

[Belzona 1391 Product Specification Sheet](#)

 Hide Details

#### Feedback Information

Viewed: 919

Helpful: 6

Not Helpful: 3

No Feedback Found