



Tech Tips

TT 87-14-02

Date: November 17, 2016

2015-2016 eGolf Evacuating/Filling Refrigerant

May 13, 2016: Update to Model Year Applicability.

When servicing the air conditioning of the e-Golf, The repair manual in Elsa has special instructions and requires additional steps to be performed before evacuating and filling the refrigerant circuit.

Before evacuating the refrigerant the GFF basic setting/ Filling Refrigerant Circuit under C5 Thermal management (Figure 1) must be performed to open all of the system valves. ODIS Service needs to be at version 2.15.1 or greater.



WARNING:

Failure to perform the GFF basic setting/ Filling Refrigerant Circuit test plan will result in parts of the air conditioning system remaining fully charged and under high pressure.

See Elsa notes and caution warnings for refrigerant circuit components under Repair Manual/Heating Ventilation and Air Conditioning/87 Air Conditioning/Refrigerant Circuit.



Note: In some cases it will be necessary to de-energize the high voltage system. Refer to the Elsa repair manual when servicing the components in the high voltage air conditioning system.

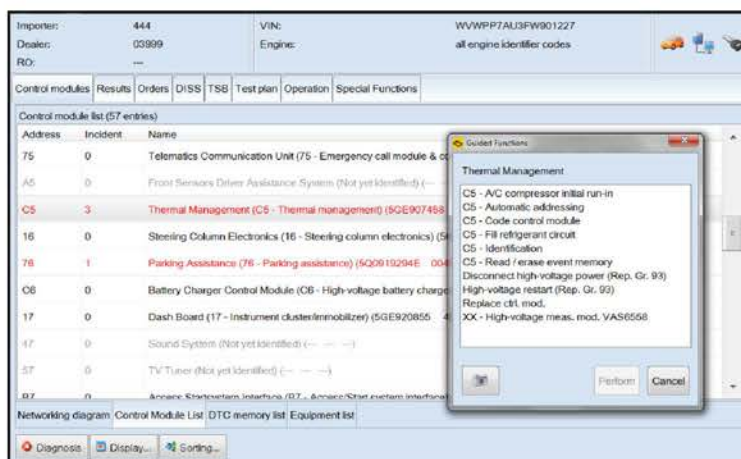


Figure 1