

NOTE: THIS LSC EXPIRES ON May 31, 2017


**TECHNICAL INSTRUCTIONS
FOR
LSC G0L
SPARE TIRE PRESSURE ADJUSTMENT
CERTAIN 2016 MODEL YEAR SCION IA**

The repair quality of covered vehicles is extremely important to Toyota. All dealership technicians performing this repair are required to successfully complete the most current version of the E-Learning course "Safety Recall and Service Campaign Essentials". To ensure that all vehicles have the repair performed correctly; technicians performing this repair are required to currently hold at least one of the following certification levels:

- Certified Technician (Any specialty)
- Expert Technician (Any specialty)
- Master Technician
- Master Diagnostic Technician

Always check which technicians can perform the recall remedy by logging on to <https://www.uotdealerreports.com>. It is the dealership's responsibility to select technicians with the above certification level or greater to perform this repair. Carefully review your resources, the technician skill level, and ability before assigning technicians to this repair. It is important to consider technician days off and vacation schedules to ensure there are properly trained technicians available to perform this repair at all times.

I. OPERATION FLOW CHART

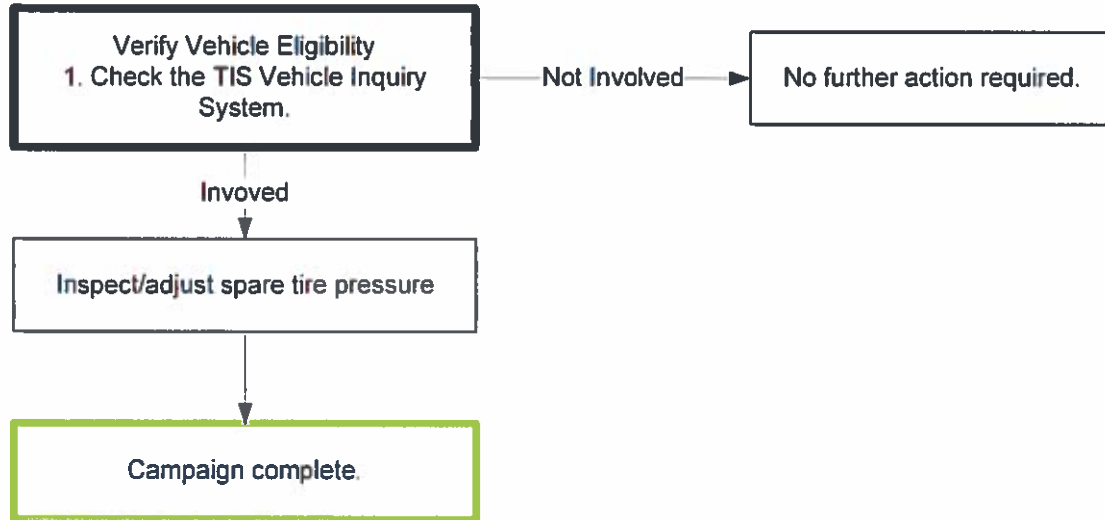

II. IDENTIFICATION OF AFFECTED VEHICLES

A. COVERED VIN RANGE

- Check the TIS Vehicle Inquiry System to confirm the VIN is involved in this LSC, and that the campaign has not already been completed prior to dealer shipment or by another dealer.
- TMS warranty will not reimburse dealers for repairs conducted on vehicles that are not affected or were completed by another dealer.

III. PREPARATION

A. PARTS

No parts are needed to complete this repair


B. TOOLS & EQUIPMENT

- Standard hand tools
- Tire gauge
- Tire inflation equipment

IV. BACKGROUND


The subject vehicles are equipped with a spare tire that could have been under inflated during vehicle processing.

V. WORK PROCEDURE

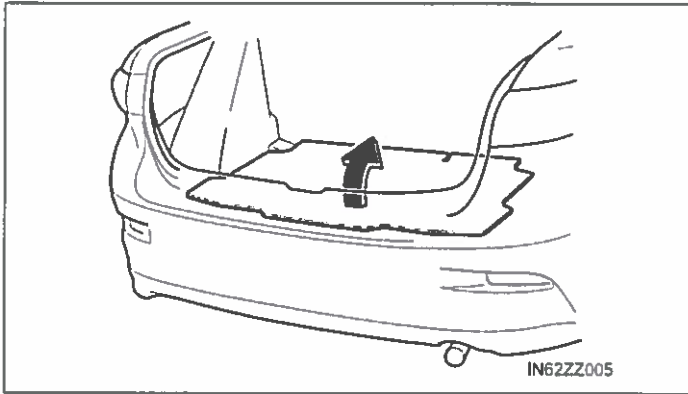

1. CHECK SPARE TIRE PRESSURE

- a) Open trunk.
- b) Lift the trunk mat.

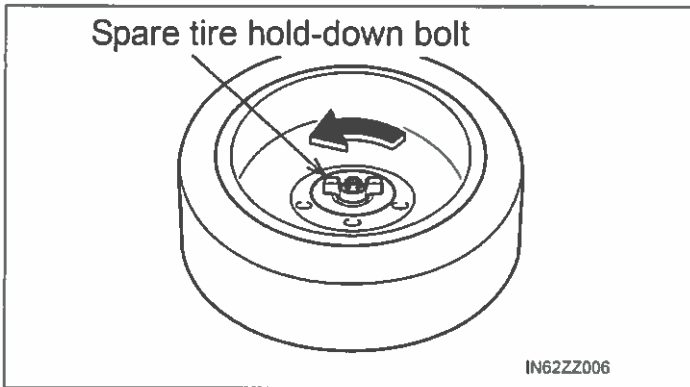

- c) Remove the spare tire hold down bolt.
- d) Remove the spare tire.
- e) Check tire pressure.
Specifications: 60-77 PSI (420-530 kpa)
- f) Adjust tire pressure as needed.
- g) Reinstall the spare tire.
- h) Reinstall the hold down bolt.
- i) Reinstall the trunk mat.

◀ VERIFY REPAIR QUALITY ▶

If you have any questions regarding this update, please contact your regional representative.

VI. APPENDIX

A. CAMPAIGN DESIGNATION DECODER

