

June 26, 2018

Version 1

Product Update: 2017 Civic Type-R Turbocharger Control Solenoid Valve Circuit

AFFECTED VEHICLES

Year	Model	Trim	VIN Range
2017	Civic	Type-R	Check the iN VIN Status for Eligibility.

BACKGROUND

The MIL comes on with DTC P0035 (turbocharger bypass control solenoid valve circuit high) and the message **REV Match System Problem / Emissions System Problem** on the MID.

California residents only: This product update also affects emissions. Have the service advisor give the certificate to the customer as proof that the recall was completed.

CUSTOMER NOTIFICATION

Owners of affected vehicles will be sent a notification of this campaign.

Do an iN VIN status inquiry to make sure the vehicle is shown as eligible.

POSSIBLE CAUSES

Due to heat and the natural frequency of the harness, the coupler wire oscillates, causing an open circuit to the turbocharger bypass control solenoid valve.

CORRECTIVE ACTION

Replace the engine wire harness with the updated kit.

PARTS INFORMATION

Part Name	Part Number	Quantity
Engine Wire Harness Kit	06321-5BF-305 (Controlled Part)	1
Exhaust Pipe Gasket	18303-T2B-A01	1
Exhaust Pre Chamber Gasket	18393-SDB-A00	1
Self-Lock Nut (10 mm)	90212-SA5-003	6

CUSTOMER INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by "do-it-yourselfers," and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Honda automobile dealer.

WARRANTY CLAIM INFORMATION

The normal warranty applies.

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
7371DC	Replace the engine wire harness.	4.1 hrs	6BV00	V2000	A18044A	32110-5BF-A01

Skill Level: Repair Technician

REPAIR PROCEDURE

1. Disconnect the 12-volt battery. Refer to the service information.
2. Raise the vehicle on a lift.
3. Remove the following parts from underneath the vehicle. Refer to the service information.
 - Engine undercover
 - Unbolt and slide back the heat shield above exhaust pipe B




HEAT SHIELD
Slide rearward.

- Exhaust pipe A


- Power steering gearbox heat shield

NOTE

Carefully remove exhaust pipe A to avoid damaging the steering gearbox heat shield.

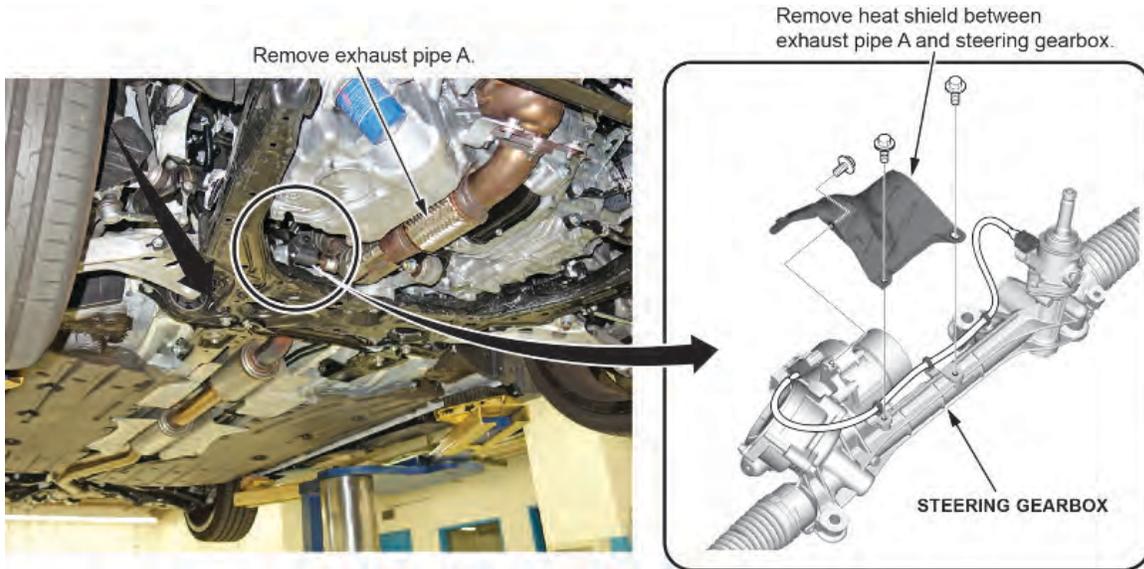

4. Disconnect the engine wire harness connectors underneath and at the back of the engine.

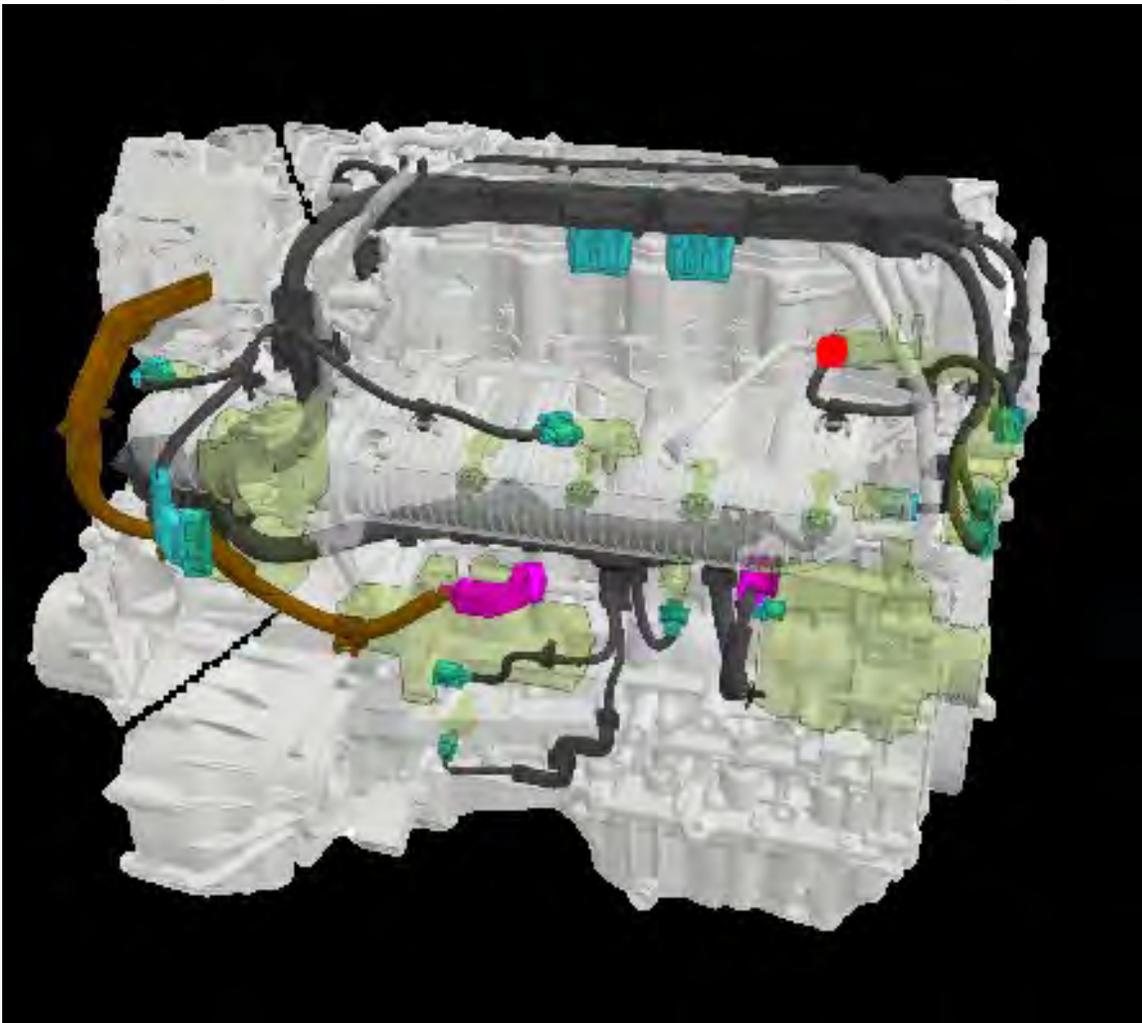

5. Lower the vehicle.
6. Remove the following parts at the engine compartment. Refer to the service information.
 - Engine cover
 - Engine air box assembly
 - Battery and battery tray
 - ECU
 - Charge air cooler and bracket
 - Cooling system bypass heater hoses

NOTE

Carefully remove the heater hoses and cap off to avoid coolant loss.




HEATER HOSES
Disconnect and swing up
and out of the way.

- Intake manifold bracket
7. Unbolt the coolant reservoir, then move it out of the way.

NOTE

Do not disconnect the hoses to the coolant reservoir.


8. Disconnect the engine wire harness connectors, and unbolt the ground wires.

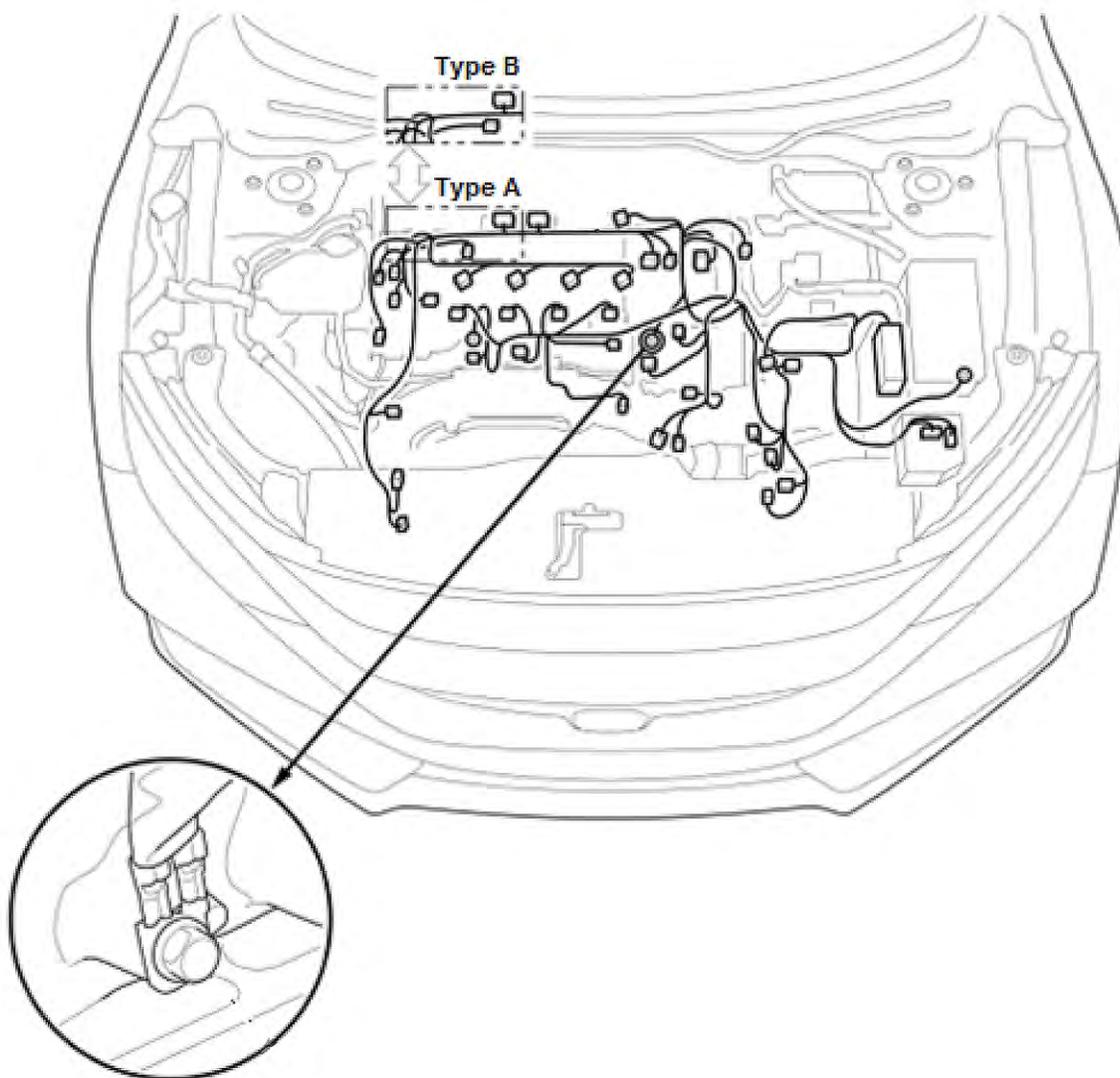



9. Remove the turbocharger bypass control solenoid valve and pipe as shown.

NOTE

The turbocharger bypass control solenoid valve will be relocated and reused.

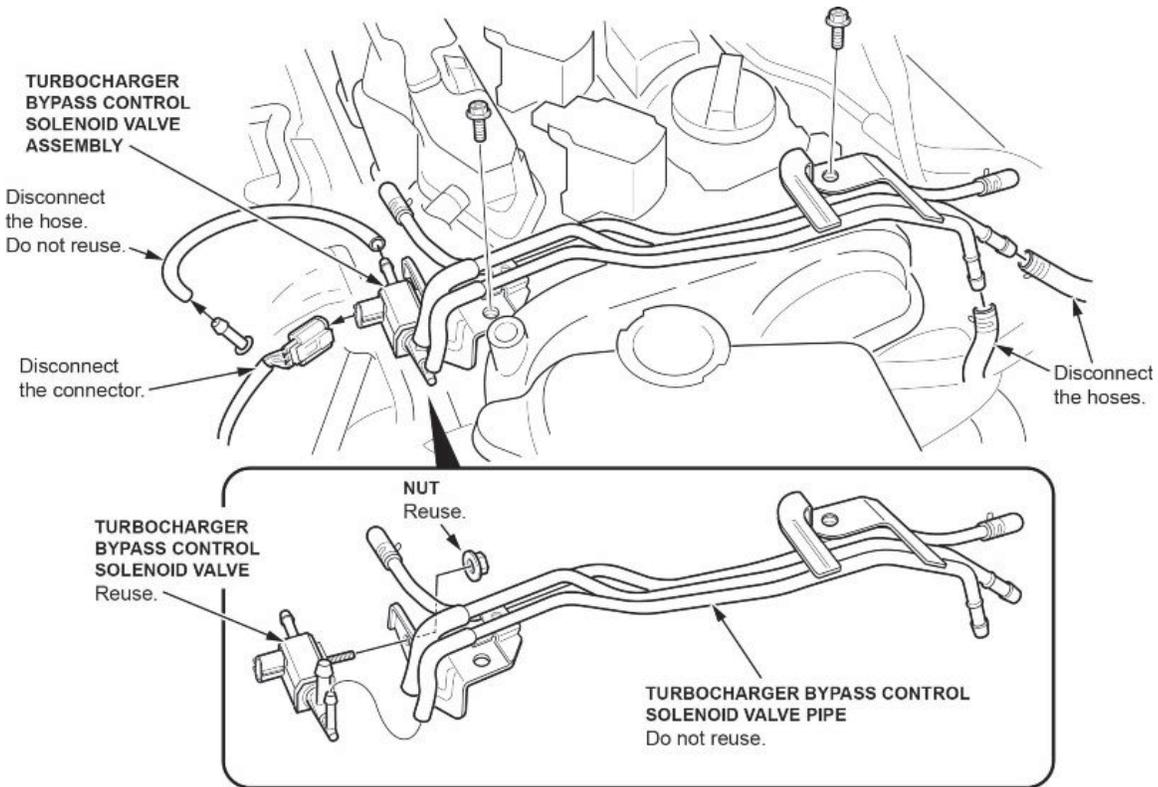

10. Remove the engine wire harness.
11. Install the new turbocharger bypass control solenoid valve pipe, connect the new hoses, and install the turbocharger bypass control solenoid valve as shown.

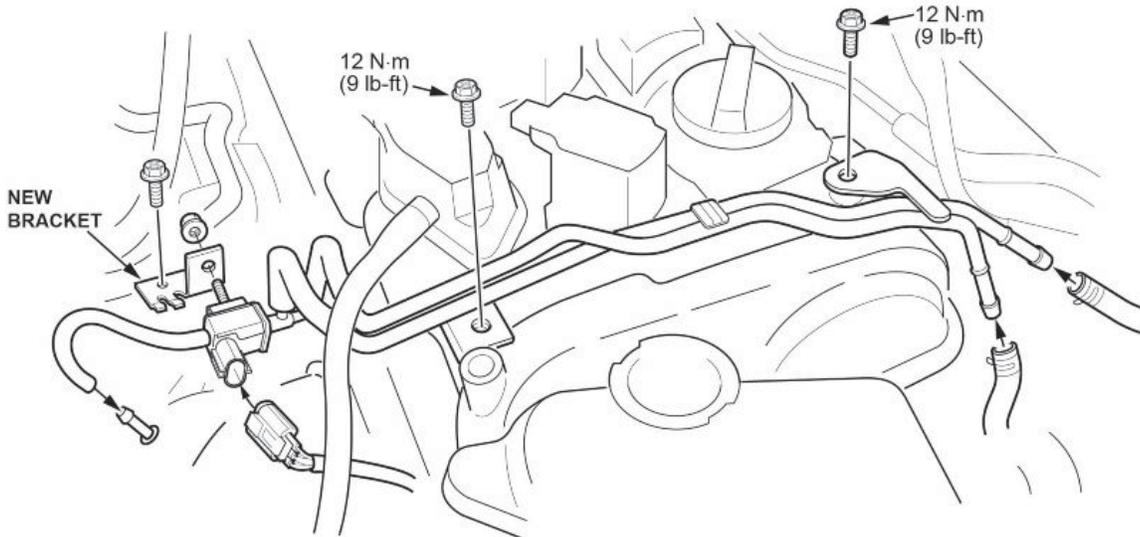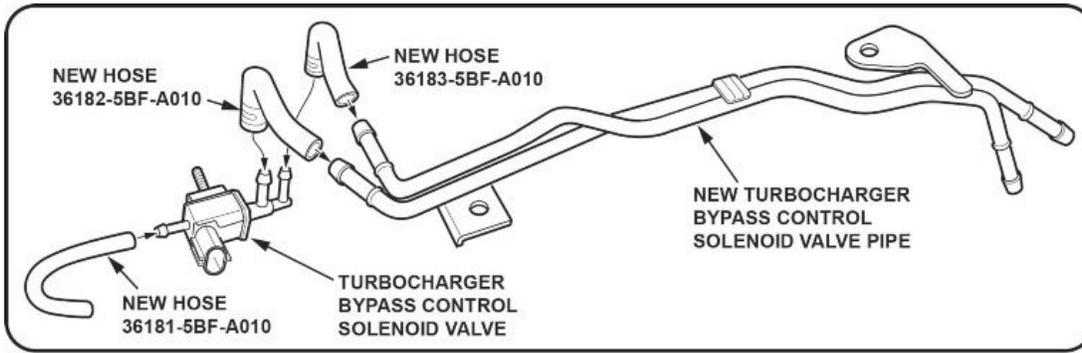

12. Install the new engine wire harness and related parts included in the kit.
13. Install all removed parts in the reverse order of removal. Refer to the service information.
14. Top off the coolant.

15. *California residents only*: Fill out a Vehicle Emissions Recall – Proof of Correction certificate, and use V20 as the recall number. Have the service advisor give the certificate to your customer, and advise him or her to keep it as proof that the recall was completed. Your customer will need to submit this certificate to the DMV only if the DMV requests it. If you need more certificates, use reorder number Y0657.

Vehicle Emission Recall - Proof of Correction				
License Number	Make	Year Model	Body Type	Vehicle Identification Number
Manufacturer _____			Recall Number V20	
The above described vehicle has been repaired, modified and/or equipped with new emission control devices to meet applicable California Emission Control Laws.				
Dealer's Name _____		Address, City, State and Zip _____		
Date _____	Dealership's Authorized Signature _____			
X				
Return this certificate to DMV <u>only</u> when required - otherwise retain for your records.				

Y0657 ACL 24832 (0212)

END