



RUSSIA, AUSTRALIA, BAHAMAS, BOLIVIA, BRAZIL, BELIZE, CANADA, CHILE, TAIWAN, COLOMBIA, COSTA RICA, DOMINICAN REPUBLIC, ECUADOR, EL SALVADOR, TRINIDAD AND TOBAGO, UNITED STATES, URUGUAY, VENEZUELA, MEXICO, ARUBA, NICARAGUA, PERU, PUERTO RICO, Curaçao, GUAM, GUATEMALA, GUYANA, HAITI, HONDURAS, JAMAICA, KOREA, SOUTH KOREA, NEW ZEALAND, PANAMA, SOUTH AFRICA

Countries: URUGUAY, VENEZUELA, MEXICO, ARUBA, NICARAGUA, PERU, PUERTO RICO, Curaçao, GUAM, GUATEMALA, GUYANA, HAITI, HONDURAS, JAMAICA, KOREA, SOUTH KOREA, NEW ZEALAND, PANAMA, SOUTH AFRICA

Availability: ISIS, Bus ISIS, FleetISIS, IsSIR

Major System: REAR AXLE

Current Language: English

Other Languages: [Français](#), [Español](#), [Português](#)

Viewed: 22781

Document ID: IK1400005

Revision: 15

Created: 5/16/2008

Last Modified: 11/13/2018

Author: Konstantinos Ntouvas

[Less Info](#)

Hide Details

Coding Information

Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks				 1741	 2121

Title: Driveline Information Center and Troubleshooting Procedures**Applies To:** All Vehicles

Change Log

Dealers: Please refer to the change log text box below for recent changes to this article:

11/13/2018- Updated ride height adjustment procedure
11/07/2018- Updated article owner
03/16/2018- Updated coding
05/24/2016 - Updated tool PN
02/19/2016 - Updated propshaft coding information for clarity.
12/14/2015 - Combined multiple articles to troubleshoot and repair drivelines and driveline angles.
11/02/2015 - Inserted info from IK0600006, removed hyperlinks to IK0600006 & IK0300004 (info moved to TSI in 2012), fixed hyperlink to IK0300008, removed subjective info from step 2
10/16/2015 - Author updated for feedback purposes

Description

This article provides information to properly check driveline angles and driveline runout, and how to use that information to properly repair the vehicle and bring the driveline into specification. The information is to assist in resolving a vibration complaint that may be caused by the driveline. This article does not address other possible vibration issues, such as vibrations caused by the engine.

- For engine vibrations, cab vibrations, or mirror shake issues please refer to [IK0300008 - Vibration Troubleshooting](#)

Symptoms

- Vibration

Inspecting and Measuring the Driveline

Tool Information

Part Number	Description	Qty
ZTSE4329	Digital Protractor*	1

*Service Portal- Service Reference- Tools Catalog

Troubleshooting

1. Check and record air ride height setting.

- If the air ride is not adjusted properly then readjust to the proper specifications and road test to determine if problem has now been fixed.
- Refer to the Truck Manual for proper ride height measurement procedures and ride height settings.
- To properly adjust the ride height:

If ride height is higher specification:

- Do not bend height control system brackets or rods to adjust suspension height.
- Loosen lever arm bolt that holds arm to height control valve.
- Pivot lever arm down to exhaust air from suspension, lowering chassis to some point below correct air spring height.
- Final air spring height must be achieved by adding air to suspension, not exhausting.
- Add air until axle travel reaches proper value per truck manual ride height recommendations.
- When correct axle travel value has been achieved, retighten lever arm bolt.

If ride height is less than specification:

- Do not bend height control system brackets or rods to adjust suspension height
- Loosen lever arm bolt that holds arm to height control valve.
- Push lever arm up to add air to suspension, raising chassis, until axle travel reaches proper value per truck manual ride height recommendations.
- When correct axle travel value has been achieved, retighten lever arm bolt.


2. Visually inspect driveline for damage

- Inspect for dents or missing weights.
- Inspect u-joints and yokes for excessive play. It is important to do this prior to re-lubing the joints.
- Insure the u-joint bearing cups are properly seated in the yokes and that the caps are not spinning.

3. Measure driveshaft runout in three locations on each shaft.

- 3" from each end of and center of the tube.
- InterAxle shafts can be measured in the center only.
- For accurate measurements, the paint should be removed first.
- Mark the "high" spots at each location on the tube.
- The ends should be less than 0.020", ideally below 0.010" and the center should be less than 0.025", ideally below 0.015".
- If the measurements exceed the limits at either end, the u-joint at the end of the shaft with the high measurement should be removed from the yoke and reinstalled in the yoke after rotating either the yoke or the shaft 180 degrees.
- Remeasure the runouts and note the location of the high spots.
- If the runout is still excessive, check to see if the high spot moved on the shaft approximately 180 degrees or if it stayed in the same spot.
- Moving of the high spot indicates the yoke is out of round, not the shaft.
- Although you may have a driveline shop rebalance and/or straighten a shaft, if a vibration remains, it is important to again document the runout and verify it is below the previously mentioned "ideal" limits.
- [Click here for a printable worksheet.](#)

Figure 1 - Measuring Driveline Runout

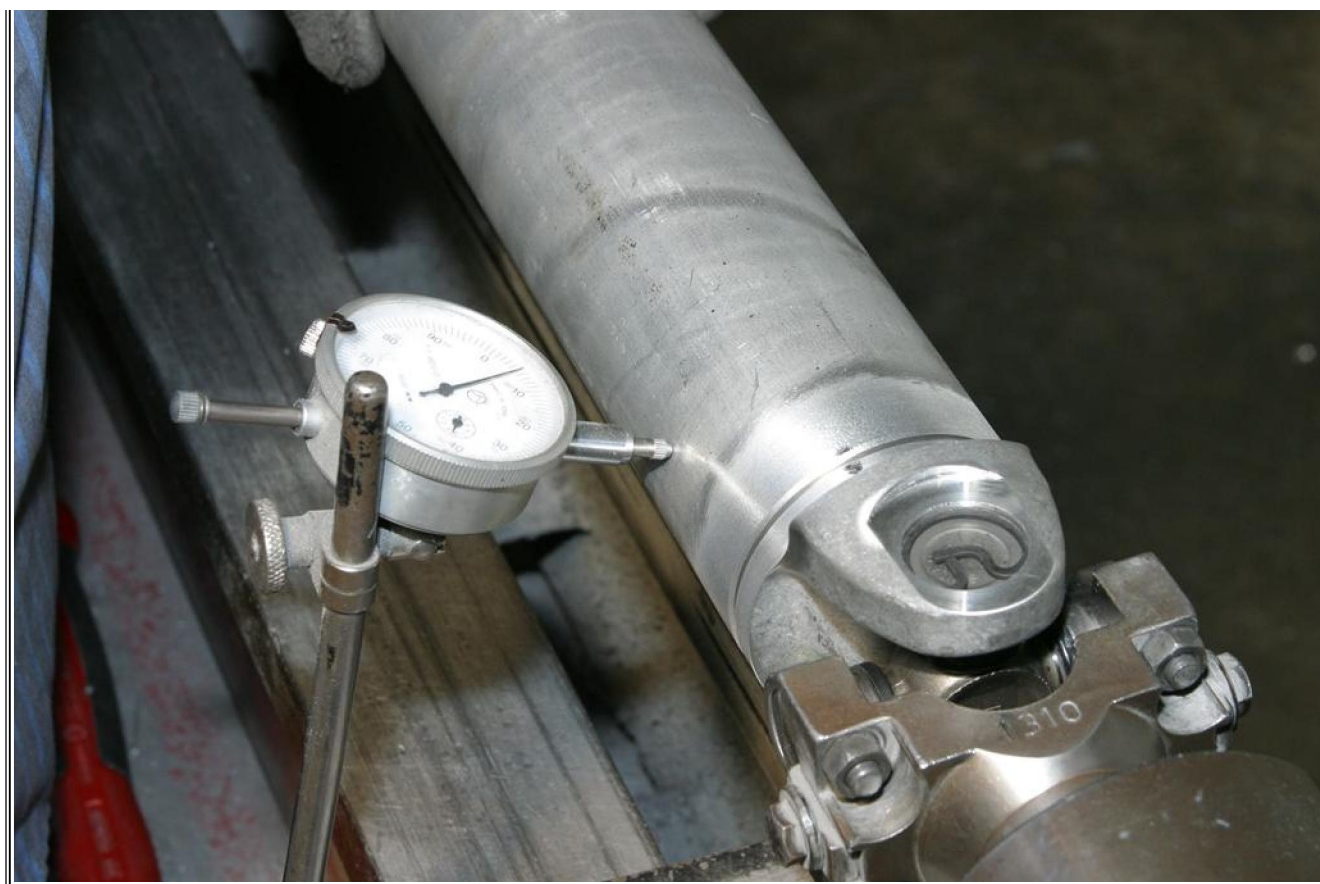

4. Inspect the amount of movement in the spline section of the driveshaft
 - The dial or digital indicator base must be installed on one side of the splines (on the prop shaft), and the needle on the other side of the splines.
 - If the dial indicator base is mounted on a solid surface, erroneous measurements will result.
 - This measurement should read less than 0.015".
5. If the problem still exists then you will need to obtain driveline angle measurements.
 - Choose the appropriate form for the chassis configuration you are working on.

4x2	6x4	4x4 / 6x6	4x2 / 6x4 with Aux Section
1 Piece Driveline	1 Piece Main Driveline	4x4	2 Piece Driveline with 2 Axles
2 Piece Driveline	2 Piece Main Driveline	4x4 with 2 Piece Rear Driveline	3 Piece Driveline with 2 axles
3 Piece Driveline	3 Piece Main Driveline	6x6	
4 Piece Driveline	4 Piece Main Driveline		

Helpful hints for accurate driveline and angle measuring:

- To properly check your digital clinometer, use a two foot level on a workbench; level the level then set protractor on level and press zero, then turn your protractor around 180 degrees to face away from you and recheck to make sure it still reads zero. The two readings should be within 0.1 degrees of each other. This is test is performed to check the accuracy of the digital clinometer.
- Once you have tested the accuracy of the tool, place the digital clinometer on the frame rail and zero it. This is done so you always have the same reference. If you zero the protractor at any other location, you would need to verify the frame angle is the same as the original recorded angle before any adjustments could be made.
- Take all readings from the same surface of the digital clinometer and keep it pointed in the same direction for every measurement. The example photos show this clearly. The orientation of the writing (do not turn the tool upside down from when you started), and the same end of the digital clinometer always facing the front of the vehicle.
- Double check transmission angle measurement which can be obtained from the u-joint cap on the output yoke, engine valve cover, oil pan bolts and sometimes a flat surface on the head of the engine as well as transmission pan or valve body.
- Be very diligent to get a good reading off the rear end housing. The surface of the cup needs to be properly cleaned to insure you get an accurate measurement. Use a socket on the u-joint cap. The caps will not all be vertical when the unit is pulled into the work bay.

Removing the wheel chocks and rolling the truck forward or backwards until the u-joint is vertical is the most acceptable method to obtain an accurate reading.

- Due to the short tube length of drive shafts between the rear drive axles, it is highly recommended to use the v-block that comes with the RoadRanger driveline angle analyzer kit to keep the digital clinometer from contacting the welds at the end of the tube.
- Be aware the ARROW in the LCD points towards 0°. The angles in Figure 2 and Figure 3 are positive angles.
 - Arrow pointing down is a positive angle. (Front side of the component is higher than the rear).
 - Arrow pointing up is a negative angle. (Front side of the component is lower than the rear).
 - Example: The transmission will typically have a positive angle.
 - Example: The prop shaft to the steer axle in a 4x4 will typically have a negative angle.

Figure 2 - Measuring Pinion Angle



- This is a positive reading. The arrow points towards 0°. This means the front of the component is higher than the rear.
 - The arrow would point up for a negative reading.
- Use caution with the digital protractor to ensure you do not hit the "Hold" or "Alt Zero" buttons while taking your readings.
- Be diligent to ensure the tool has the same orientation when taking your readings.

Figure 3 - Measuring the Intermediate Shaft



- This is a positive reading. The arrow points towards 0°. This means the front of the component is higher than the rear.
 - The arrow would point up for a negative reading.
- Use caution with the digital protractor to ensure you do not hit the "Hold" or "Alt Zero" buttons while taking your readings.
- Be diligent to ensure the tool has the same orientation when taking your readings.

Filling out the Driveline Angle Worksheet

6. Measure the frame rake. To take the measurement of frame rake find a clean flat surface anywhere on frame. Verify level is on and the arrow on the level labeled facing toward front of vehicle is actually facing toward the front of the vehicle, and the arrow on level labeled facing toward rear is actually facing toward rear. Once this is verified and you have your frame rake angle hit the zero button on level. This will allow level to set the frame rake for calculation of drive line measurements.
 - Zeroing the digital protractor on the frame will allow you to always have the same reference point to zero if multiple measurements are required. (Even if the truck is moved between each set of measurements).
7. Measure the transmission angle. This will rarely need to be changed, a normal measurement for transmission angle is between 3 and 4 degrees. To take transmission angle you will have to get measurements off transmission or engine block surface and sometimes a boss on the bell housing. Take multiple measurements to make sure you are getting the correct reading.
8. Measure the first prop shaft. Take measurements in the middle of the prop shaft, taking several measurements at each component to get as accurate angles as possible. Depending on the model and drive line setup take the remaining drive line angles at each prop shaft until the differential or the transfer case depending on the setup of the truck. Always remember to keep protractor, or level pointed in the same direction on each component measured.
9. Measure the transfer case or rear differential find a flat, machined surface on component and take multiple measurements for accurate reading. If there is no place to take accurate measurement you can turn yoke straight up and down and use level to read the flat of the u-joint bearing cup. (Refer to Figure 2 above). The surface of the cup needs to be properly cleaned to insure you get an accurate measurement. Also a good socket or machined round socked can be used to space down from the u joint cap and allow for a measurement to be taken.
10. Measure the inter axle driveline angle. There is an attachment in Roadranger tooling kit used for inter axle shaft due to the prop shaft being so short it is difficult to get good measurement. (Refer to Figure 3 above).

11. Measure the rear differential using the same procedure as forward differential. (Refer to Figure 2 above).

Correcting Driveline Angles

The driveline angles will need to be checked using Eaton Driveline Angle Analyzer Software, or Allison Calc. You must use Allison Calc if the vehicle is equipped with an Allison transmission.

You will need the following information:

- Tire Revs per Mile
- Transmission Top Gear Ratio
- Rear Axle Ratio
- Max Vehicle Speed


Use ServiceMaxx to obtain the 4 items of information. Input this information into [IK2600160 - Vehicle Speed Calculator](#).


- Leave "Engine Speed" blank.
- Hit "Calculate" to find the Max Engine Speed in Top Gear (Refer to Figure 4)

Figure 4 - Vehicle Speed Calculator Example			
Tire Revs/Mile	512	Tire Revs/Mile	512
Trans Gear Ratio	.75	Trans Gear Ratio	.75
Rear Axle Ratio	3.36	Rear Axle Ratio	3.36
Engine Speed	Leave Blank	Engine Speed	1376
Vehicle Speed	64	Vehicle Speed	64
Driveline RPM		Driveline RPM	1835
Calculate		Calculate	

• This is an example only. You need the information you gathered from ServiceMaxx for accurate calculations.

Using Eaton Driveline Angle Analyzer (DAA)

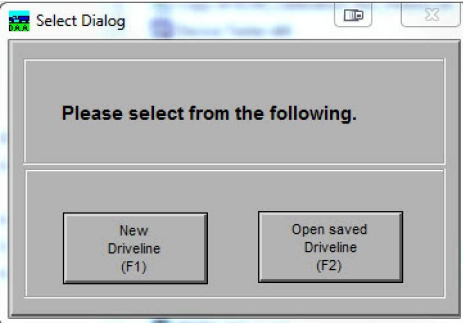Figure 5 - Open Eaton DAA and Select Driveline Configuration

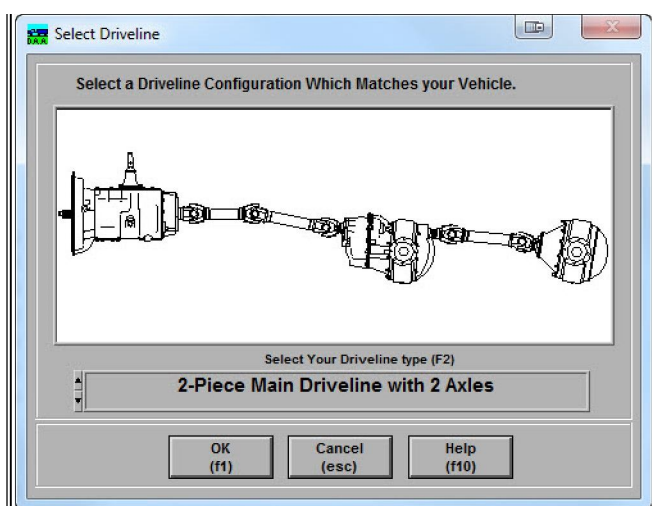


- Open Eaton Driveline Angle Analyzer, Select New Driveline, Scroll through the Driveline Types until you find the configuration that matches the vehicle you are working on.

Figure 6 - Enter Driveline and Axle Information

- Enter the basic information for the Driveline and Axle.
- Choosing the incorrect driveline series will affect the inertials when the measurements are inputted.
- Choosing the axle does not affect the inertials. You must not choose "other" or Corrective Mode will not work properly.

Prop Shaft Information

English	Metric	Series Number
209	409	SPL55
207	407	SPL70
210	410	SPL100
210	410	SPL100
214	414	SPL140
217	417	SPL170
225	425	SPL250
235	435	SPL350
259	459	SPL90
249	449	1480
255	455	1550
259	459	1590
259	459	1590
260	426	1610
270	427	1710
276	428	1760
281	429	1810
	440	RPL20
	450	RPL25

Line Set Ticket
 VIN Number 3HSDJSNR7GN074266 Model **PROSTAR+ 122 6X4** Build Date 9/16/2015
 Eng Srl Number **2Y4405588** Model Code LF68700 Order Qty 50
 Dealer Number 706812 Order Number/Suffix 129905 Starting Job Number 074221
 Sold To Heartland Express In Sales Region 222 Paint Code 9219
 GVWR 52350 Ignition Key Z148 Wheel Base 230.3 in / 585.0 cm
 AF Dimension 53.1 in / 135.0 cm Gear Ratio 3.36 Recall Pending No

Prop Shaft Coding can be found in the parts catalog, near the bottom of the Lineset

Explanation of Prop Shaft Locations

Prop Code	Qty	Location
0440RTS0470	1	4
0450RTA1810	1	1
0450RTH0970	1	3

The first 4 digits identify the series as explained in the chart to the left.

Clicking the prop code gives diameter and wall thickness information.

Figure 7 - Entering the Measurements Taken on Vehicle

Driveline Angle Analyzer

2-Piece Main Driveline with 2 Axles

Trans #1 Prop Shaft #2 Prop Shaft D head #3 Prop Shaft R head

Max Driveline RPM: 1835.56 RPM

Drive Inertials: 23.63 ft-lbs

Coast Inertials: 4.94 ft-lbs

Trans to D head: 39.96 rad/sec²

D head to R head: 393.93 rad/sec²

Overall: 395.95 rad/sec²

Marginal

Angles Phase Length (in.) Air Bag Height

Frame Angle: 0.00 Front Ride Height: 0.00

Transmission: 3.50 Back Ride Height: 0.00

#1 Prop Shaft: 2.25 Phase Angle: 0 deg Length: 71.25

#2 Prop Shaft: 1.30 Phase Angle: 0 deg Length: 38.25

D head Axle: 3.00

Interaxle Shaft: 9.00 Phase Angle: 0 deg Length: 18.50

R head Axle: 8.00

Comments:

Max Engine RPM in Top Gear: 1373

Top Gear Ratio of Transmission: 0.75

Note: Red Fields are required for inertial calculations.

The information from IK2600160 is entered here.

That ensures the Max Driveline RPM is accurate.

- Enter the measurements you took on the vehicle and see if any adjustment is required.

Figure 8 - Entering Corrective Mode to Make Adjustments

The screenshot shows the 'Driveline Angle Analyzer' software window. The title bar reads '2-Piece Main Driveline with 2 Axles'. The interface includes a menu bar (File, Help), a toolbar, and a main workspace. On the right, a summary panel displays 'Max Driveline RPM: 1835.56 RPM' and various inertial values (Drive, Coast, Trans to D head, D head to R head, Overall) in green boxes, with a 'Good' status indicator. The main workspace is divided into sections for 'Angles', 'Phase', 'Length (in.)', and 'Air Bag Height'. The 'Angles' section lists values for Frame Angle (0.00), Transmission (3.50), #1 Prop Shaft (2.25), #2 Prop Shaft (1.30), D head Axle (3.00), Interaxle Shaft (7.21), and R head Axle (9.95). The 'Phase' section shows Phase Angles for #1 and #2 Prop Shafts and the Interaxle Shaft, all set to 0 deg. The 'Length' section shows lengths for #1 and #2 Prop Shafts and the Interaxle Shaft. The 'Air Bag Height' section shows Front and Back Ride Heights set to 0.00. A 'Comments' text area is at the bottom left. A 'Note: Red Fields are required for inertial calculations.' is displayed. A 'Corrective Mode' button is highlighted in green and labeled 'ON'. A red box highlights the 'Corrective Mode is ON' status and the 'R head Axle' value, with an arrow pointing to the 'Corrective Mode' button. A red curved arrow points from the 'R head Axle' value to the 'Corrective Mode' button.

Corrective Mode is ON.
 • Increasing the rear pinion angle by 1.95 has corrected the drive line in this example.
 • This also causes the Interaxle Shaft angle to change.

- Enter Corrective Mode.
- Attempt to correct the drive line angles with the least amount of changes.
- Correcting by adjusting the prop shafts is less labor intensive than changing seats and plates.
- If the seats and plates need to be changed to make the correction, you must use the chart below and calculate the difference in pinion angle from the measured pinion angle.
 - Example:
 - 8° was measured on truck. Truck had 3548298C1 Seats installed.
 - Truck is unloaded, 7.58° on the chart. Changing to a 3548299C1 Seat shows 9.53° unloaded.
 - That would give you 1.95° of pinion angle change (9.53 minus 7.58).
 - The 8° measured plus 1.95° increase is 9.95° and brings the driveline into specification.
 - You must also check that when the vehicle is loaded, the angles will stay within specification. (Refer to Figure 9).

NOTE:

0 working angles are not acceptable. Eaton DAA will not catch this error.

Figure 9 - Using Corrective Mode to Check Loaded Angles (If Required)

Driveline Angle Analyzer

File Help

2-Piece Main Driveline with 2 Axles

Trans #1 Prop Shaft #2 Prop Shaft D head #3 Prop Shaft R head

Max Driveline RPM: 1835.56 RPM

Drive Inertials: 4.88 ft-lbs

Coast Inertials: 19.28 ft-lbs

Trans to D head: 88.86 rad/sec²

D head to R head: 139.08 rad/sec²

Overall: 165.08 rad/sec²

Good

Angles Phase Length (in.) Air Bag Height

Frame Angle: 0.00 Front Ride Height: 0.00

Transmission: 3.50 Back Ride Height: 0.00

#1 Prop Shaft: 2.25 Phase Angle: 0 deg Length: 71.25

#2 Prop Shaft: 0.89 Phase Angle: 0 deg Length: 38.43

D head Axle: 3.75

Interaxle Shaft: 6.34 Phase Angle: 0 deg Length: 18.50

R head Axle: 10.70

Comments:

Max Engine RPM in Top Gear: 1373

Top Gear Ratio of Transmission: 0.75

Note: Red Fields are required for inertial calculations.

New Driveline F2

Open F3

Save F4

Print Worksheet F5

Information F6

Measurements F7

Corrective Mode

ON

Restore Baseline

Print Results F8

Directions F9

Help F10

Exit DAA Esc

Remain in corrective mode.
Increase the pinion angles by 0.75 each to see the drive line in the loaded state.
This should be checked when a vehicle is measured unloaded.
This causes the #2 Prop Shaft and Interaxle Shaft to change in this example.

- Verify the angles remain in specification when loaded. (If Required)
 - Example Continued:
 - Front Drive Axle Seats installed: 3548297C1. Pinion angle will increase 0.75° when loaded. (4.45 minus 3.70)
 - Rear Drive Axle Seats now installed: 3548299C1. Pinion angle will increase 0.75° when loaded (10.28 minus 9.53)
 - Increase both pinion angles in corrective mode to see the reaction.
 - In this example the drive line is within specification when loaded.
 - Every seat is 0.75° difference between loaded and unloaded.

Using Allison Calc

- Allison Calc will only check one single axle at a time.
- For 6x4, 4x4, 6x6 or Drop Box applications you will need to run multiple analysis.
- Refer to the information below which uses the 6x4 from Figure 9 as the example.
- If a drive line needs to be adjusted it is easier to run the adjustments in Eaton DAA, then check using Allison Calc before making any changes to the vehicle.

Figure 10 - Open Allison Calc

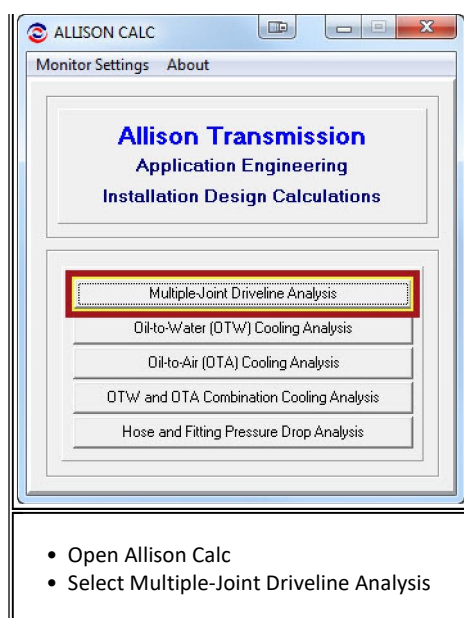


Figure 11 - Transmission and Axle Information

Multiple Joint Driveline Analysis

This Example is using the same information from Figure 9.
 Select Type of Driveline
 Enter the Number of Joints
 Enter the Transmission Output RPM
 Enter the Transmission Vertical Slope
 Enter the Axle Vertical Slope (Forward Drive Axle)
 Click on Calculate

Input Data
☒ US
☐ SI Metric

Output Data
☒ US
☐ SI Metric

11/16/2015

Type of Driveline
☒ Output, Without Propshaft-mounted Driveline Retarder
☐ Output, With Propshaft-mounted Driveline Retarder
☐ Input (Between Engine and Transmission)

Data Input
 Number of Joints: 3
 Transmission Output rpm: 1835.56

Vertical Slope (degrees)
 Transmission: 3.5
 Axle: 3.75

Horizontal Slope (degrees)
 Transmission: 0
 Axle: 0

Calculate
 Clear
 Menu
 End

- As this checks to a single axle at a time, the axle vertical slope in this example is the Forward Drive Axle.
- Enter all required information.
- Use 0 for Horizontal Slope.
- There are 2 prop shafts between the transmission and forward drive axle in Figure 9. This gives you 3 joints.
- Transmission Output RPM is calculated using [IK2600160 - Vehicle Speed Calculator](#) the same way it is calculated for Eaton Driveline Angle Analyzer.

Figure 12 - Prop Shaft Information

MJDLA Input

Shafts and Joints are numbered from Transmission to Axle

Shaft Slopes (degrees)	Joint Offsets (in)	Shaft Lengths (in)	Shaft Phases (degrees)
Shaft #1: 2.25	Joint #1: 0	Shaft #1: 71.25	Shaft #1: 0
Shaft #2: 0.89	Joint #2: 0	Shaft #2: 38.43	Shaft #2: 0
	Joint #3: 0		

Enter Prop Shaft information
Click OK

OK Back

- Enter Prop Shaft angles and lengths.
- Joint Offset is 0.
- Shaft Phasing should match the phasing on the truck.

Figure 13 - Overview

MJDLA

Allison Transmission
Multiple Joint Driveline Analysis
Output Driveline

This is an overview of the information you have entered.
Click Continue.

	Vertical Slope (degrees)	Horizontal Slope (degrees)	Shaft Length (in)	Shaft Phase (degrees)	Joint offset (in)
Transmission	3.5	0.0	N/A	N/A	
shaft # 1	2.3	0.0	71.25	0.0	Joint # 1 0.00
shaft # 2	0.9	0.0	38.43	0.0	Joint # 2 0.00
Axle	3.8	0.0	N/A	N/A	Joint # 3 0.00

Transmission Output rpm: 1835.56

Continue Back

- This provides an overview of the information you have entered.
- Click Continue.

Figure 14 - Results

MJDLA

Results

Output Driveline

	Effective Angle (deg)	<----- Acceleration (radian/sec ²) ----->		
		Limit	Actual	Status
Torsional	2.81	500	89	OK
inertial (Drive)	1.13	1000	14	OK
inertial (Coast)	3.81	1000	163	OK

The final page provides the results of the analysis.

Joint Coordinates

	x	y	z	Vertical	Horiz	True
	<----- (in) ----->			<----- (deg) ----->		
Joint# 1	.00	.00	.00	1.25	.00	1.25
Joint# 2	71.20	2.80	.00	1.36	.00	1.36
Joint# 3	109.62	3.39	.00	-2.86	.00	2.86

- Results of the First Section of the driveline analysis.
- This example is for a 6x4 and the process have to be completed twice.

Figure 15 - Analysis of the Forward Drive Axle to Rear Drive Axle

Multiple Joint Driveline Analysis

Continuation of the analysis of the driveline in Figure 9
(Checking the Forward Drive Axle to Rear Drive Axle)
Select Type of Driveline
Enter the Number of Joints
Enter the Transmission Output RPM
Enter the Transmission Vertical Slope (Use the Forward Drive Axle for this input)
Enter the Axle Vertical Slope (Use the Rear Drive Axle for this input)
Click on Calculate

Type of DriveLine

☒ Output, Without Propshaft-mounted Driveline Retarder
☐ Output, With Propshaft-mounted Driveline Retarder
☐ Input (Between Engine and Transmission)

Data Input

Number of Joints	Transmission Output rpm
2	1835.56

Vertical Slope (degrees) Transmission 3.75 Axle 10.70	Horizontal Slope (degrees) Transmission 0 Axle 0
--	---

- Still using the drive line example from Figure 9.
- The Forward Drive Axle to Rear Drive axle must be checked.
- There is only 1 prop shaft. This gives you 2 joints.
- The slope of the Forward Drive Axle is entered in the Transmission Vertical Slope box.
- The slope of the Rear Drive Axle is entered in the Axle Vertical Slope box.

Figure 16 - Prop Shaft Information (Interaxle Shaft)

MJDLA Input

Shafts and Joints are numbered from Transmission to Axle

Shaft Slopes (degrees)	Joint Offsets (in)	Shaft Lengths (in)	Shaft Phases (degrees)
Shaft #1 6.34	Joint #1 0	Shaft #1 18.5	Shaft #1 0
	Joint #2 0		

Enter Prop Shaft information
Click OK

OK Back

- Enter Prop Shaft angle and length. (This is the Interaxle shaft from Figure 9 in this example)
- Joint Offset is 0.
- Shaft Phasing should match the phasing on the truck.

Figure 17 - Overview of the Forward Drive Axle to Rear Drive Axle

MJDLA

Allison Transmission
Multiple Joint Driveline Analysis
Output Driveline

This is an overview of the information you have entered.
This is the Forward Drive Axle to Rear Drive Axle.
Click Continue.

	Vertical Slope (degrees)	Horizontal Slope (degrees)	Shaft Length (in)	Shaft Phase (degrees)	Joint offset (in)
Transmission	3.8	0.0	N/A	N/A	
shaft # 1	6.3	0.0	18.50	0.0	Joint # 1 0.00
Axle	10.7	0.0	N/A	N/A	Joint # 2 0.00

Transmission Output rpm : 1835.56

Continue Back

- Open Allison Calc
- Select Multiple-Joint Driveline Analysis

Figure 18 - Results of the Forward Drive Axle to Rear Drive Axle

MJDLA

Results

Output Driveline

	Effective Angle (deg)	Limit	Acceleration (radian/sec ²) Actual	Status
Torsional	3.51	500	139	OK
inertial (Drive)	2.59	1000	76	OK
inertial (Coast)	4.36	1000	214	OK

The final page provides the results of the analysis.
This is the Forward Drive Axle to Rear Drive Axle.

Joint Coordinates

	x	y	z	Vertical	Horiz	True
	<----- (in) ----->			<----- (deg) ----->		
Joint# 1	.00	.00	.00	-2.59	.00	2.59
Joint# 2	18.39	2.04	.00	-4.36	.00	4.36

- Open Allison Calc
- Select Multiple-Joint Driveline Analysis

Other Resources

- [S06001 - Propeller Shaft](#)
- [S06002 - CF500, CF600 Driveshaft](#)

Pinion Angle				IROS Seat Parts Information			Plate Parts Information		
Loaded	Unloaded	1/3 Load	Part Angle	Machined Part Number	Cast Part Number	Cast Pinion Angle (As listed in parts catalog)	6x4 & 4x2 HD Plate	4x2 MD Plate (with Shock Mount)	
								Left Side	Right Side
0.60	-0.15	0.05	-6.00	3601570C2	3548295C1	2	3541719C3	3541725C3	3541726C3
2.26	1.51	1.71	-4.25	3601571C2			3541720C3	3541727C3	3541728C3
2.50	1.75	1.95	-4.00	3601572C2	3548296C1	4	3541720C3	3541727C3	3541728C3
2.75	2.00	2.20	-3.75	3601573C2			3541720C3	3541727C3	3541728C3
3.23	2.48	2.68	-3.25	3601574C2			3541720C3	3541727C3	3541728C3
3.47	2.72	2.92	-3.00	3601575C2			3541721C3	3541729C3	3541730C3
4.45	3.70	3.90	-2.00	3601576C2	3548297C1	6	3541721C3	3541729C3	3541730C3
5.42	4.67	4.87	-1.00	3601577C2			3541721C3	3541729C3	3541730C3
7.36	6.61	6.81	1.00	3601578C2			3541722C3		
8.33	7.58	7.78	2.00	3601579C2	3548298C1	10	3541722C3		
9.31	8.56	8.76	3.00	3601580C2			3541722C3		
9.55	8.80	9.00	3.25	3601581C2			3541723C3		
10.04	9.29	9.49	3.75	3601582C2			3541723C3		
10.28	9.53	9.73	4.00	3601583C2	3548299C1	12	3541723C3		
10.52	9.77	9.97	4.25	3601584C2			3541723C3		
11.49	10.74	10.94	5.25	3601585C2			3541724C3		
12.20	11.45	11.65	6.00	3601586C2	3548300C1	14	3541724C3		

12.46	11.71	11.91	6.25	3601587C2			3541724C3		
-------	-------	-------	------	-----------	--	--	-----------	--	--

Hendrickson HAS Seat Information			
Degree	Hendrickson P/N	International P/N	Required Plate P/N
Forward Axle Seats			
2	50970-1	H50970001	H50216000
2.5	50970-2	H50970002	H50216000
3	50970-3	H50970004	H50216000
4	50970-5	H50970005	H50216000
4.5	50970-6	H50970006	H50216000
5	50970-7	H50970007	H50216000
5.5	50970-8		H50216000
6	50970-9		H50216000
6.5	50970-10		H50216000
7	50970-11		H50216000
Rear Axle Seats			
7	50973-13	H50973013	H50222000
8	50973-1	H50973001	H50222000
8.5	50973-2	H50973002	H50222000
9	50973-3	H50973003	H50222000
9.5	50973-4	H50973004	H50222000
10	50973-5	H50973005	H50222000
10.5	50973-6	H50973006	H50222000
11	50973-7	H50973007	H50222000
11.5	50973-8	H50973008	H50222000
12	50973-9	H50973009	H50222000
12.5	50973-10	H50973010	H50222000
13	50973-15	H50973015	H50222000
13.5	50973-14	H50973014	H50222000
14	50973-16	H50973016	H50222000


Rear Leaf Spring Seat Information	
Degree	Part Number
1	520339C2
2	495364C1
3	3552912C1
6	3518107C1

Center Bearing Brackets

- Here is a list of commonly used Center Bearing Brackets.
- If the center bearing bracket your truck was built with is not on this list it has a different width or offset. If you need a longer bracket you will need a case file.
- If you need a shorter bracket you can move the prop shaft up to the desired angle, then mark and drill new holes in the existing bracket.

Common Center Bearing Brackets				
*Min Height for Clearance = 3.00"				
B" Length	C = 0° Angle	C = 3° Angle	C = 6° Angle	

2.50		997986C1	547681C1
3.00	3517669C1	484963C1	2031864C1
3.30	1613108C1	484964C1	3579785C1
3.60	3527899C1	484965C1	3573130C1
3.90	3573124C1	484966C1	3573131C1
4.20	3573125C1	484967C1	484975C1
4.50	546260C1	484968C1	3573132C1
4.80	3573126C1	483973C1	1689958C1
5.10	3573127C1	484969C1	537433C1
5.40	3573128C1	485877C1	3573133C1
5.70	3573129C1	484970C1	484976C1
6.00	1620406C1	484971C1	3530579C1
6.30	1688060C1	484972C1	483971C1
6.60	3530576C1	484973C1	3530580C1
6.90	3517670C1	484974C1	571510C1
7.20	3579776C1	494657C1	496866C1
7.50	3579777C1	485157C1	494667C1
7.80	3527900C1	485158C1	483972C1
8.10	3741398C1	494658C1	494668C1
8.40	3527901C1	494659C1	494663C1
8.70	3527902C1	494660C1	494669C1
9.00	3530577C1	494661C1	494664C1
9.30	3527903C1	3527904C1	494670C1
9.60	3530578C1	3527905C1	3530581C1
9.90	3579778C1	494662C1	494670C1
10.20	3579779C1	3527906C1	2037330C1
10.50	3579780C1	998235C1	2037330C1
10.80	3579781C1	546173C1	3530582C1
11.10	3579782C1	2003081C1	
11.40	3579783C1	3527907C1	
11.70	3579784C1	594555C1	
12.00	2025234C1	546707C1	
12.30	2025269C1	546345C1	
12.60		3527908C1	
12.90		3527909C1	
13.50	3741400C1	3527910C1	
13.80		546708C1	
14.10		3527911C1	
14.40		3527912C1	
14.70	3741401C1		
15.00	3741402C1		
15.30	3741403C1		
15.60	3741404C1		

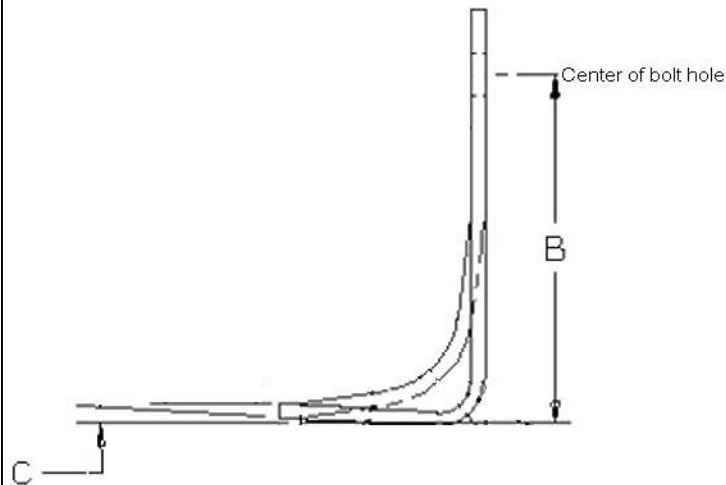

 Hide Details

Feedback Information

Viewed: 22780

Helpful: 1741

Not Helpful: 2121

No Feedback Found

Copyright © 2018 Navistar, Inc.