

SERVICE BULLETIN

Reference number:	SB-30-1571	Issued: 01 December, 2021
Subject:	Install Nitto Foam Pads to Bonnet	
Applicable to:	All Dealers	
Model:	DB11	
Distribute to:	After Sales Manager Executive Manager Service Manager Sales Manager	Warranty Staff Technician(s) Parts Staff

Dear Colleagues,

Aston Martin has found that some vehicles can have false triggers from the Park Distance Control (PDC) system. This is because interference can occur from the inner edge of the bonnet.

Do the workshop procedure that follows to install foam pads to reduce interference from the inner edge of the bonnet.

Workshop Procedure

1. Open the bonnet.
2. Install the foam pads to the underside of the bonnet in the areas shown (refer to Figure 1).

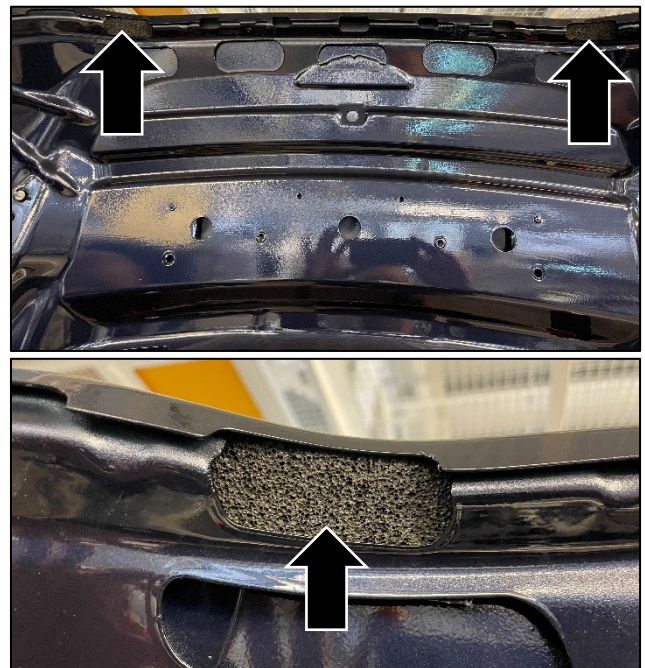


Figure 1

3. Close the bonnet.
4. Do a check to make sure the PDC system operates correctly.

Warranty Data**Procedure and Labour Time**

Description	Labour Time
Install Nitto Foam Pads	0.10

Part Data

Description	Part Number	Quantity
Nitto Foam Pads	HY53-403F64-AA	2

Thank you for your continued support.

Yours faithfully



John Cranfield

Senior Manager - Client Technical Services

If you have any questions related to this document, please refer to the 'Contact Us' link on this webpage, or contact your local Dealer or After Sales Manager.

The English version of this document is written in Simplified Technical English to ASD-STE100™.